

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P581428

Luminaire Tested: **HC407D010-HM40525830-41NDH**

Issue Date: 9/9/2021

Test Information

Test Method: LM-41-14
Report Number: P581428
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2106-266-2)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 9/9/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC407D010-HM40525830-41NDH
Description: HALO COMMERCIAL 4" ROUND, NEW CONSTRUCTION FRAME, WITH 4" NARROW DISTRIBUTION, HAZE TRIM
Light Source: (1) HIGH LUMEN LED 80CRI / 3000K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 793.7 lumens
Efficiency: N/A
Efficacy: 99.2 lumens/watt
Spacing Criteria (0/90/45): 0.89 / 0.89 / 0.91
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct


Input Watts (W): 8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P581428

CATALOG NUMBER: HC407D010-HM40525830-41NDH

Luminous Intensity Polar Plot

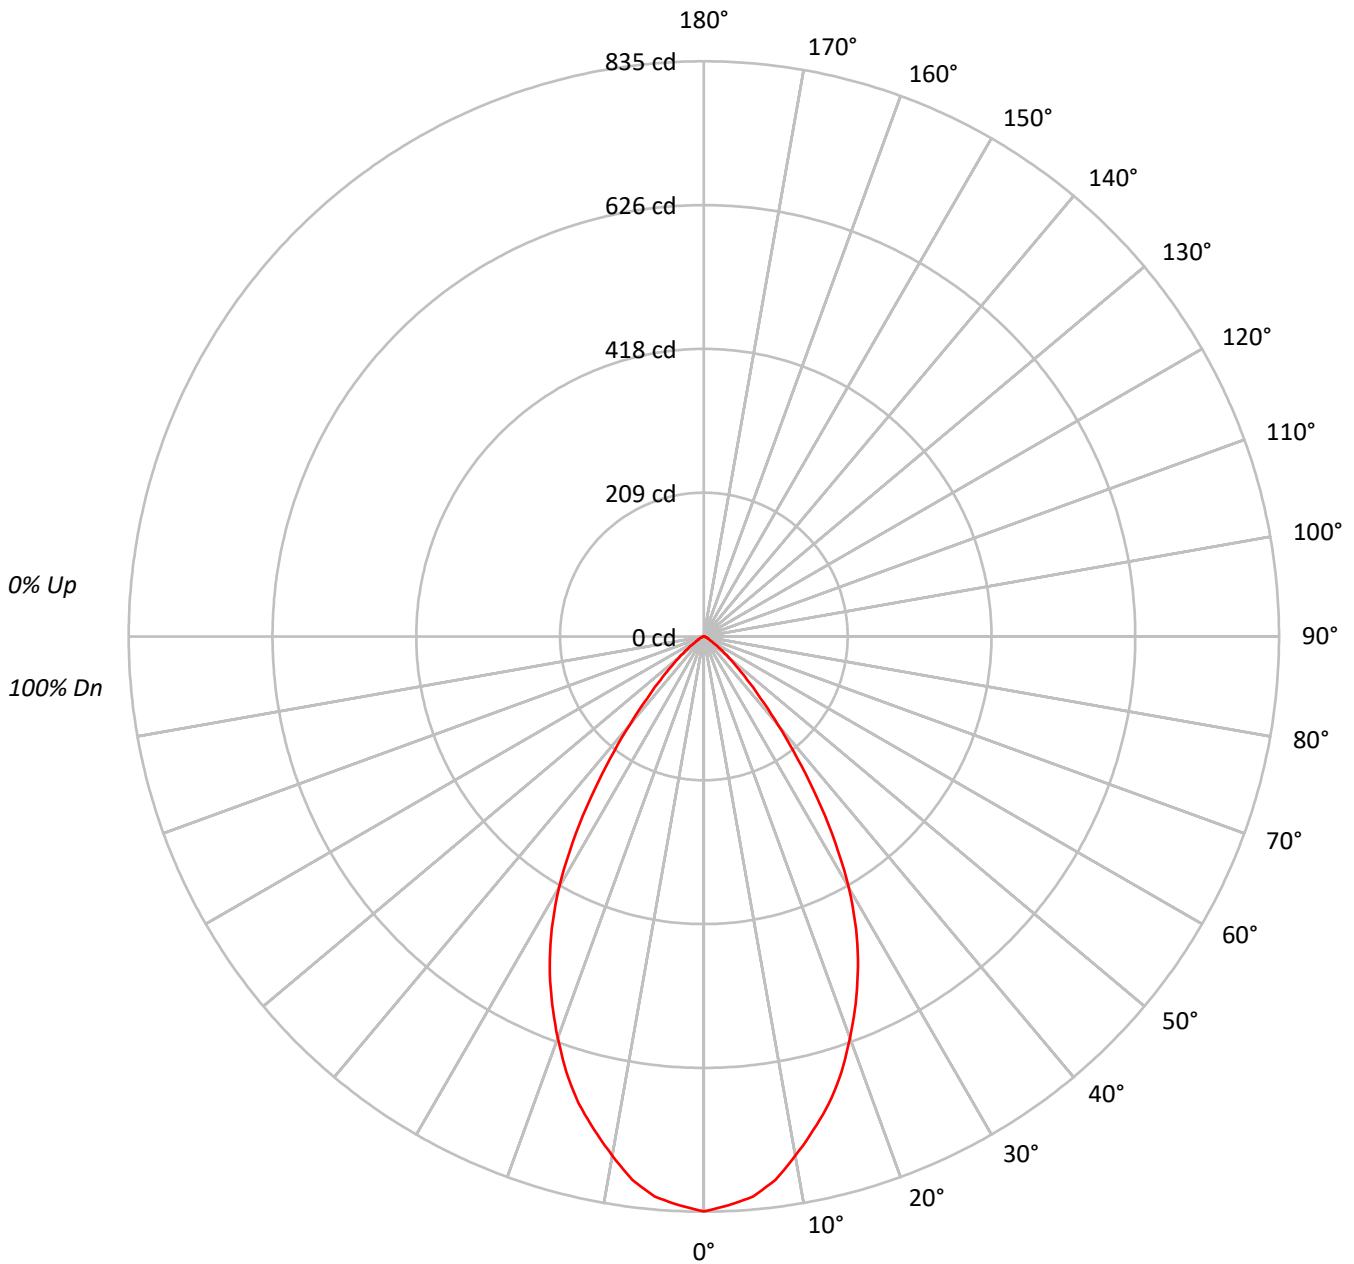



TEST NUMBER: P581428

CATALOG NUMBER: HC407D010-HM40525830-41NDH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93	93	93	93
2	107	102	98	94	105	100	96	93	97	94	91	94	91	89	91	89	87	86	86	86	86
3	101	95	89	85	99	93	88	84	91	86	83	88	85	82	86	83	81	79	79	79	79
4	96	88	82	78	94	87	81	77	85	80	76	83	79	75	81	77	74	73	73	73	73
5	91	82	76	71	89	81	75	71	79	74	70	77	73	70	76	72	69	67	67	67	67
6	86	76	70	66	84	76	70	65	74	69	65	73	68	64	71	67	64	63	63	63	63
7	81	72	65	61	80	71	65	61	70	64	60	68	64	60	67	63	60	58	58	58	58
8	77	67	61	57	76	67	61	56	65	60	56	64	59	56	63	59	56	54	54	54	54
9	73	63	57	53	72	63	57	53	62	56	52	61	56	52	60	55	52	51	51	51	51
10	70	59	53	49	69	59	53	49	58	53	49	57	52	49	57	52	49	48	48	48	48

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	102944
5°	101072
10°	95865
15°	89643
20°	81408
25°	72050
30°	59919
35°	43216
40°	26970
45°	15560
50°	8769
55°	4193
60°	2393
65°	1839
70°	1226
75°	810
80°	781
85°	849



TEST NUMBER: P581428

CATALOG NUMBER: HC407D010-HM40525830-41NDH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	76.3	9.6
10°-20°	195.8	24.7
20°-30°	240.9	30.3
30°-40°	178.9	22.5
40°-50°	72.7	9.2
50°-60°	20.1	2.5
60°-70°	6.3	0.8
70°-80°	2.1	0.3
80°-90°	0.6	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	513.0	64.6
0°-40°	691.8	87.2
0°-60°	784.7	98.9
0°-90°	793.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	793.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	835	
5°	816	76
15°	702	196
25°	529	241
35°	287	179
45°	89	73
55°	20	20
65°	6	6
75°	2	2
85°	1	1
90°	0	



TEST NUMBER: P581428

CATALOG NUMBER: HC407D010-HM40525830-41NDH

CANDELA DISTRIBUTION (FULL):

	0°
0°	834.6
2.5°	826.6
5°	816.3
7.5°	795.7
10°	765.4
12.5°	734.0
15°	702.0
17.5°	663.7
20°	620.2
22.5°	576.3
25°	529.4
27.5°	478.5
30°	420.7
32.5°	354.9
35°	287.0
37.5°	222.9
40°	167.5
42.5°	122.3
45°	89.2
47.5°	64.1
50°	45.7
52.5°	31.4
55°	19.5
57.5°	12.6
60°	9.7
62.5°	8.0
65°	6.3
67.5°	4.6
70°	3.4
72.5°	2.8
75°	1.7
77.5°	1.1
80°	1.1
82.5°	0.6
85°	0.6
87.5°	0.6
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)