

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P581538

Luminaire Tested: **HC4R07D010-HM40525940-42RMDC**

Issue Date: 9/23/2021

**Test Information**

Test Method: LM-41-14  
Report Number: P581538  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2106-266-13)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 9/23/2021  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: HALO COMMERCIAL  
Catalog Number: HC4R07D010-HM40525940-42RMDC  
Description: HALO COMMERCIAL 4" ROUND, RETROFIT FRAME, WITH 4" MEDIUM DISTRIBUTION, SPECULAR TRIM  
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 850.8 lumens  
Efficiency: N/A  
Efficacy: 106.4 lumens/watt  
Spacing Criteria (0/90/45): 1.02 / 1.02 / 0.96  
Luminous Opening: Circular (Dia: 0.33' x H: 0')  
CIE Type: Direct


Input Watts (W): 8  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P581538

CATALOG NUMBER: HC4R07D010-HM40525940-42RMDC

### Luminous Intensity Polar Plot

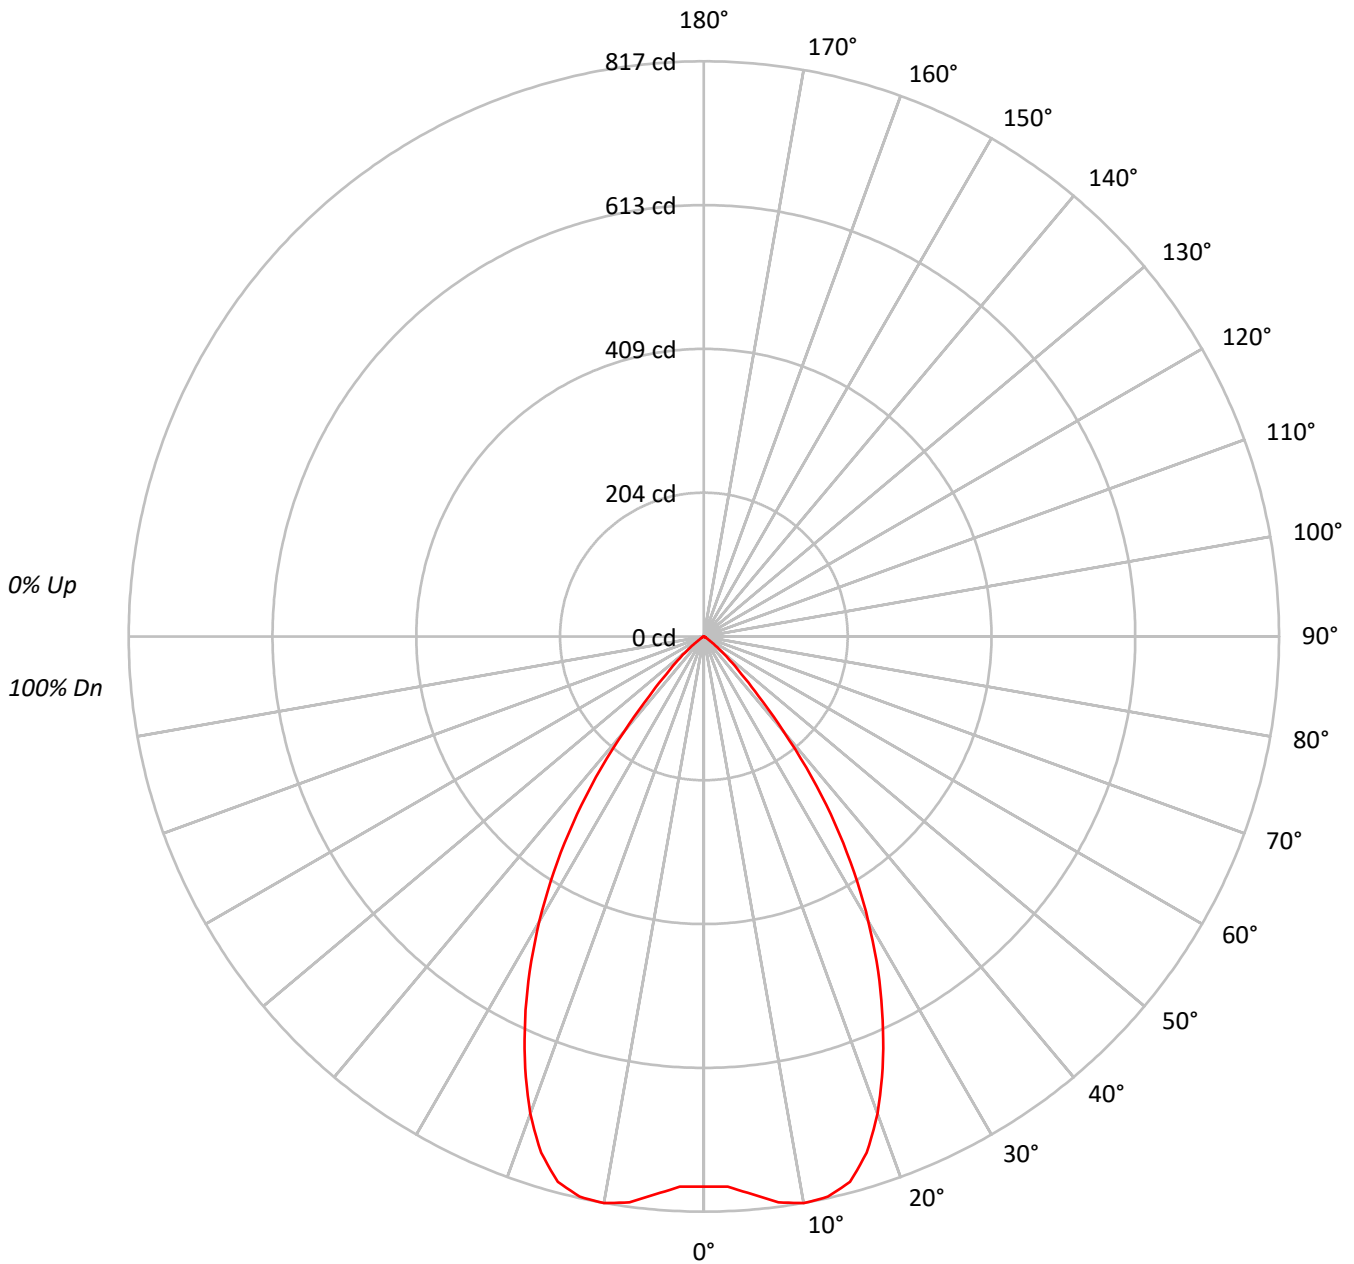



TEST NUMBER: P581538

CATALOG NUMBER: HC4R07D010-HM40525940-42RMDC

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93		
2	108	103	99	95	105	101	97	94	98	95	92	95	92	90	92	90	88	86		
3	102	95	90	86	100	94	89	86	91	87	84	89	86	83	87	84	82	80		
4	97	89	83	79	95	88	82	78	86	81	77	84	80	77	82	78	76	74		
5	92	83	77	73	90	82	76	72	80	75	72	78	74	71	77	73	70	69		
6	87	78	71	67	85	77	71	67	75	70	66	74	69	66	72	68	65	64		
7	82	73	66	62	81	72	66	62	71	65	62	69	65	61	68	64	61	60		
8	78	68	62	58	77	68	62	58	67	61	57	65	61	57	65	60	57	56		
9	74	64	58	54	73	64	58	54	63	57	54	62	57	54	61	57	53	52		
10	70	61	55	51	69	60	54	51	59	54	50	58	54	50	58	53	50	49		

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	96407
5°	98471
10°	102353
15°	102400
20°	94679
25°	81808
30°	66556
35°	48892
40°	28258
45°	13205
50°	6121
55°	2129
60°	666
65°	467
70°	397
75°	286
80°	0
85°	0



TEST NUMBER: P581538

CATALOG NUMBER: HC4R07D010-HM40525940-42RMDC

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	76.7	9.0
10°-20°	222.2	26.1
20°-30°	273.7	32.2
30°-40°	199.8	23.5
40°-50°	65.1	7.7
50°-60°	10.9	1.3
60°-70°	1.7	0.2
70°-80°	0.6	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	572.6	67.3
0°-40°	772.5	90.8
0°-60°	848.5	99.7
0°-90°	850.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	850.8	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	782	
5°	795	77
15°	802	222
25°	601	274
35°	325	200
45°	76	65
55°	10	11
65°	2	2
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P581538

CATALOG NUMBER: HC4R07D010-HM40525940-42RMDC

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	781.6
2.5°	782.1
5°	795.3
7.5°	810.7
10°	817.2
12.5°	815.0
15°	801.9
17.5°	768.9
20°	721.3
22.5°	663.7
25°	601.1
27.5°	535.9
30°	467.3
32.5°	397.2
35°	324.7
37.5°	251.7
40°	175.5
42.5°	114.6
45°	75.7
47.5°	50.0
50°	31.9
52.5°	18.7
55°	9.9
57.5°	3.9
60°	2.7
62.5°	2.2
65°	1.6
67.5°	1.1
70°	1.1
72.5°	0.6
75°	0.6
77.5°	0.6
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P







— 0°-180°







(END OF REPORT)