

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P581588

Luminaire Tested: **HC610D010-HM60525835-61MDC**

Issue Date: 9/16/2021

**Test Information**

Test Method: LM-41-14  
Report Number: P581588  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2105-241-4)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 9/16/2021  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: HALO COMMERCIAL  
Catalog Number: HC610D010-HM60525835-61MDC  
Description: HALO COMMERCIAL 6" ROUND, NEW CONSTRUCTION FRAME, WITH 6" MEDIUM DISTRIBUTION, SPECULAR TRIM  
Light Source: (1) HIGH LUMEN LED 80CRI / 3500K CCT  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1250.5 lumens  
Efficiency: N/A  
Efficacy: 126.3 lumens/watt  
Spacing Criteria (0/90/45): 1.06 / 1.06 / 0.96  
Luminous Opening: Circular (Dia: 0.5' x H: 0')  
CIE Type: Direct


Input Watts (W): 9.9  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P581588

CATALOG NUMBER: HC610D010-HM60525835-61MDC

### Luminous Intensity Polar Plot

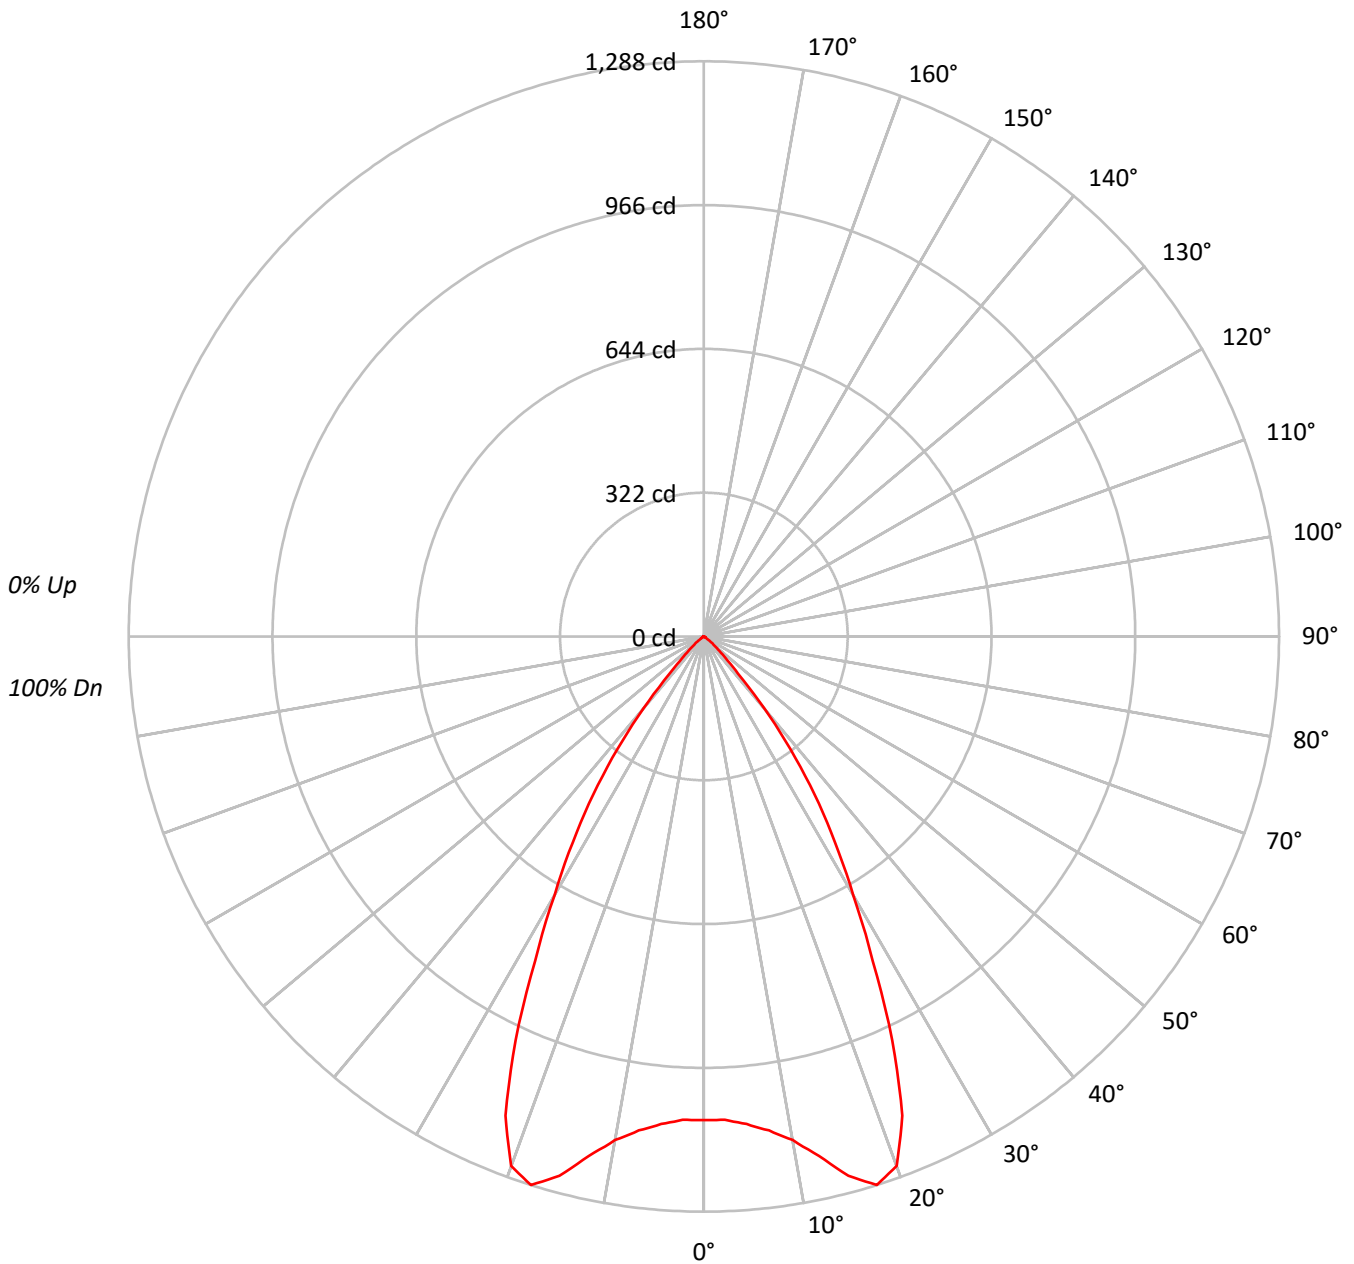



TEST NUMBER: P581588

CATALOG NUMBER: HC610D010-HM60525835-61MDC

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	111	108	106	111	109	106	104	105	103	101	101	99	98	97	96	95	94
2	108	103	99	96	106	101	98	95	98	95	93	95	93	91	92	90	89	87
3	102	96	91	87	100	95	90	86	92	88	85	90	86	84	87	85	82	81
4	97	90	84	80	95	89	83	79	86	82	79	84	81	78	83	79	77	75
5	92	84	78	74	91	83	78	73	81	76	73	80	75	72	78	74	72	70
6	88	79	73	68	86	78	72	68	76	71	68	75	71	67	74	70	67	65
7	83	74	68	64	82	73	68	63	72	67	63	71	66	63	70	66	62	61
8	79	70	63	59	78	69	63	59	68	63	59	67	62	59	66	62	58	57
9	75	66	60	56	74	65	59	55	64	59	55	63	58	55	62	58	55	54
10	72	62	56	52	71	61	56	52	61	55	52	60	55	52	59	55	52	50

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	59381
5°	60307
10°	63743
15°	70971
20°	73600
25°	60391
30°	42310
35°	28871
40°	15035
45°	5280
50°	2362
55°	755
60°	439
65°	311
70°	256
75°	169
80°	0
85°	0



TEST NUMBER: P581588

CATALOG NUMBER: HC610D010-HM60525835-61MDC

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	106.2	8.5
10°-20°	351.7	28.1
20°-30°	447.8	35.8
30°-40°	266.9	21.3
40°-50°	64.7	5.2
50°-60°	9.9	0.8
60°-70°	2.5	0.2
70°-80°	0.8	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	905.7	72.4
0°-40°	1172.6	93.8
0°-60°	1247.2	99.7
0°-90°	1250.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1250.5	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1083	
5°	1096	106
15°	1250	352
25°	998	448
35°	431	267
45°	68	65
55°	8	10
65°	2	2
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P581588

CATALOG NUMBER: HC610D010-HM60525835-61MDC

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1083.2
2.5°	1083.2
5°	1095.9
7.5°	1115.7
10°	1145.1
12.5°	1191.1
15°	1250.5
17.5°	1287.9
20°	1261.6
22.5°	1161.0
25°	998.4
27.5°	819.1
30°	668.4
32.5°	546.4
35°	431.4
37.5°	318.0
40°	210.1
42.5°	113.4
45°	68.1
47.5°	42.8
50°	27.7
52.5°	16.6
55°	7.9
57.5°	4.8
60°	4.0
62.5°	3.2
65°	2.4
67.5°	1.6
70°	1.6
72.5°	0.8
75°	0.8
77.5°	0.8
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P







— 0°-180°







(END OF REPORT)