

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P581812

Luminaire Tested: **HC615D010-HM60525935-61WDBB**

Issue Date: 9/16/2021

Test Information

Test Method: LM-41-14
Report Number: P581812
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2105-241-11)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 9/16/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC615D010-HM60525935-61WDBB
Description: HALO COMMERCIAL 6" ROUND, NEW CONSTRUCTION FRAME, WITH 6" WIDE DISTRIBUTION, BLACK BAFFLE TRIM
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1270.1 lumens
Efficiency: N/A
Efficacy: 90.7 lumens/watt
Spacing Criteria (0/90/45): 1.32 / 1.32 / 1.14
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct


Input Watts (W): 14
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P581812

CATALOG NUMBER: HC615D010-HM60525935-61WDBB

Luminous Intensity Polar Plot

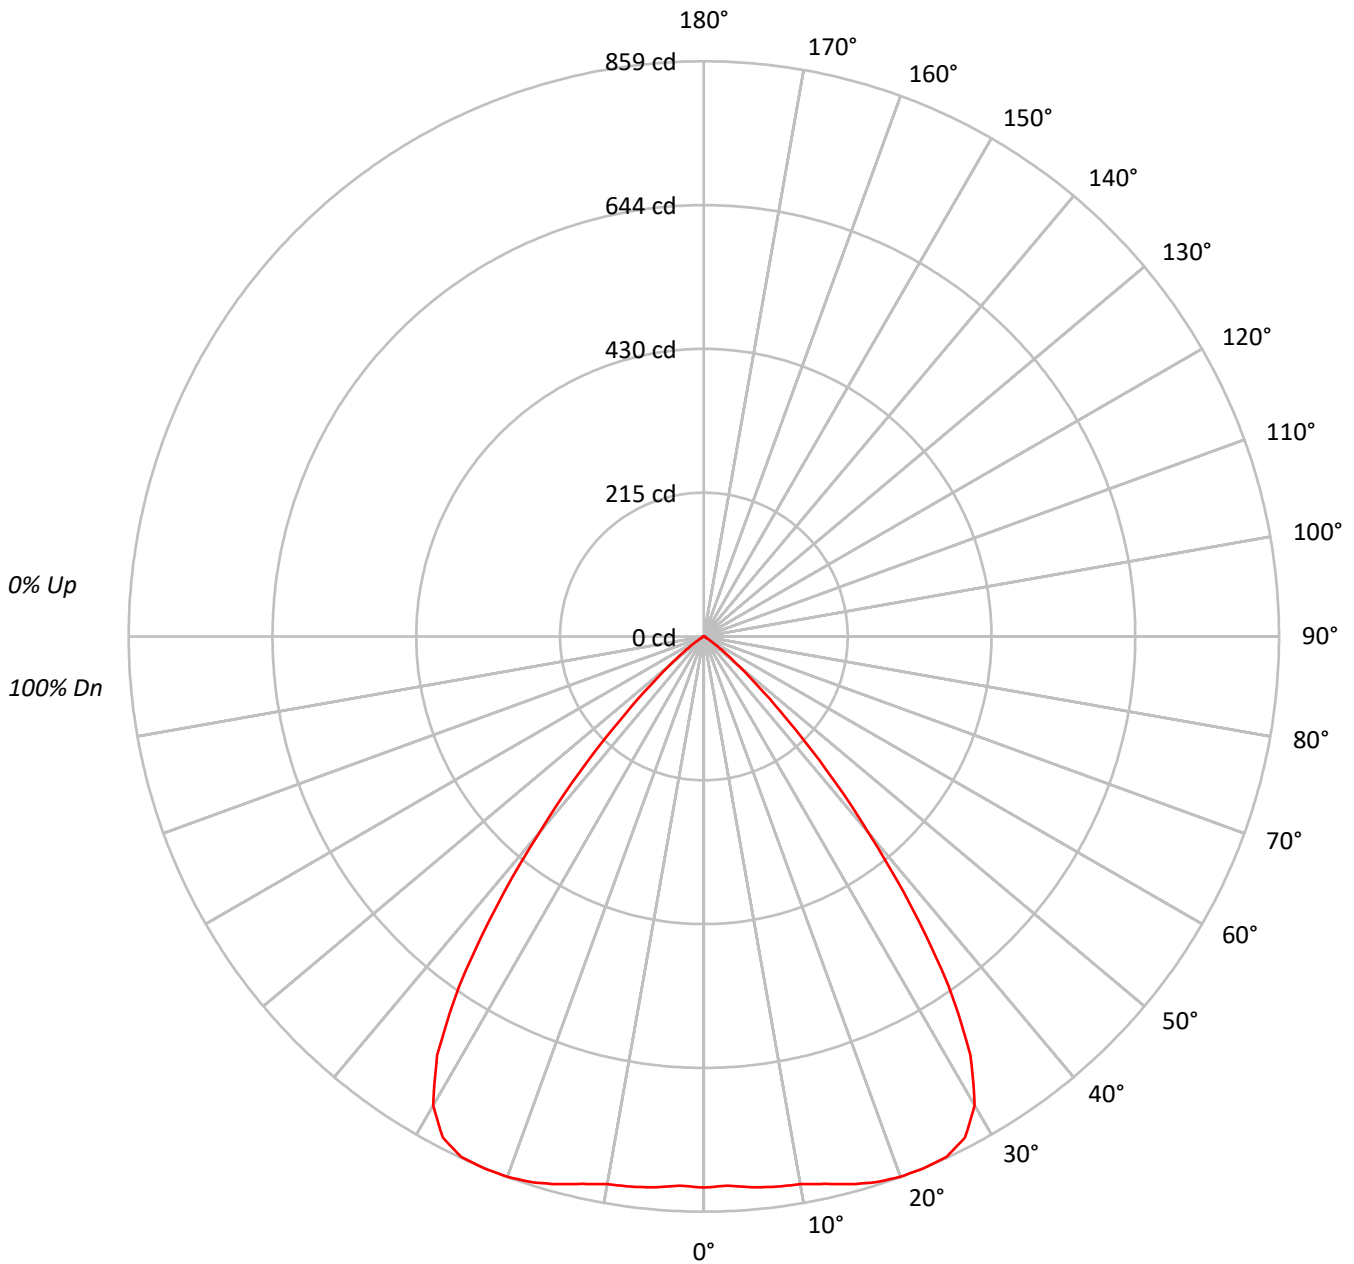



TEST NUMBER: P581812

CATALOG NUMBER: HC615D010-HM60525935-61WDBB

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	107	105	110	108	105	103	104	102	100	100	98	97	97	95	94	92	92	92	92
2	107	101	97	93	104	100	95	92	96	93	90	93	91	88	90	88	86	85	85	85	85
3	100	93	88	83	98	92	87	83	89	85	81	87	83	80	84	81	79	77	77	77	77
4	95	86	80	75	93	85	79	75	83	78	74	81	77	73	79	75	72	71	71	71	71
5	89	80	73	68	87	79	73	68	77	72	67	75	70	67	73	69	66	65	65	65	65
6	84	74	67	62	82	73	67	62	71	66	62	70	65	61	69	64	61	59	59	59	59
7	79	69	62	57	77	68	61	57	66	61	57	65	60	56	64	59	56	54	54	54	54
8	74	64	57	52	73	63	57	52	62	56	52	61	56	52	60	55	52	50	50	50	50
9	70	59	53	48	69	59	53	48	58	52	48	57	52	48	56	51	48	46	46	46	46
10	66	56	49	45	65	55	49	45	54	49	45	53	48	44	53	48	44	43	43	43	43

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	45112
5°	45443
10°	46236
15°	48065
20°	50084
25°	51868
30°	51179
35°	42643
40°	27337
45°	13660
50°	5424
55°	1845
60°	526
65°	363
70°	305
75°	402
80°	284
85°	0



TEST NUMBER: P581812

CATALOG NUMBER: HC615D010-HM60525935-61WDBB

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	79.0	6.2
10°-20°	240.2	18.9
20°-30°	392.2	30.9
30°-40°	384.5	30.3
40°-50°	147.4	11.6
50°-60°	21.6	1.7
60°-70°	3.2	0.2
70°-80°	1.6	0.1
80°-90°	0.4	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	711.4	56.0
0°-40°	1095.9	86.3
0°-60°	1265.0	99.6
0°-90°	1270.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1270.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	823	
5°	826	79
15°	847	240
25°	858	392
35°	637	385
45°	176	147
55°	19	22
65°	3	3
75°	2	2
85°	0	0
90°	0	



TEST NUMBER: P581812

CATALOG NUMBER: HC615D010-HM60525935-61WDBB

CANDELA DISTRIBUTION (FULL):

	0°
0°	822.9
2.5°	820.9
5°	825.8
7.5°	828.7
10°	830.6
12.5°	837.3
15°	846.9
17.5°	854.7
20°	858.5
22.5°	859.4
25°	857.5
27.5°	844.1
30°	808.5
32.5°	741.0
35°	637.2
37.5°	509.2
40°	382.0
42.5°	272.4
45°	176.2
47.5°	107.8
50°	63.6
52.5°	36.5
55°	19.3
57.5°	8.6
60°	4.8
62.5°	3.9
65°	2.8
67.5°	2.8
70°	1.9
72.5°	1.9
75°	1.9
77.5°	0.9
80°	0.9
82.5°	0.9
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)