

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P581994

Luminaire Tested: **HC625D010-HM60525827-61WDH**

Issue Date: 9/16/2021

Test Information

Test Method: LM-41-14
Report Number: P581994
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2105-241-8)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 9/16/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC625D010-HM60525827-61WDH
Description: HALO COMMERCIAL 6" ROUND, NEW CONSTRUCTION FRAME, WITH 6" WIDE DISTRIBUTION, HAZE TRIM
Light Source: (1) HIGH LUMEN LED 80CRI / 2700K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2454.8 lumens
Efficiency: N/A
Efficacy: 91.6 lumens/watt
Spacing Criteria (0/90/45): 1.18 / 1.18 / 1.08
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct


Input Watts (W): 26.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P581994

CATALOG NUMBER: HC625D010-HM60525827-61WDH

Luminous Intensity Polar Plot

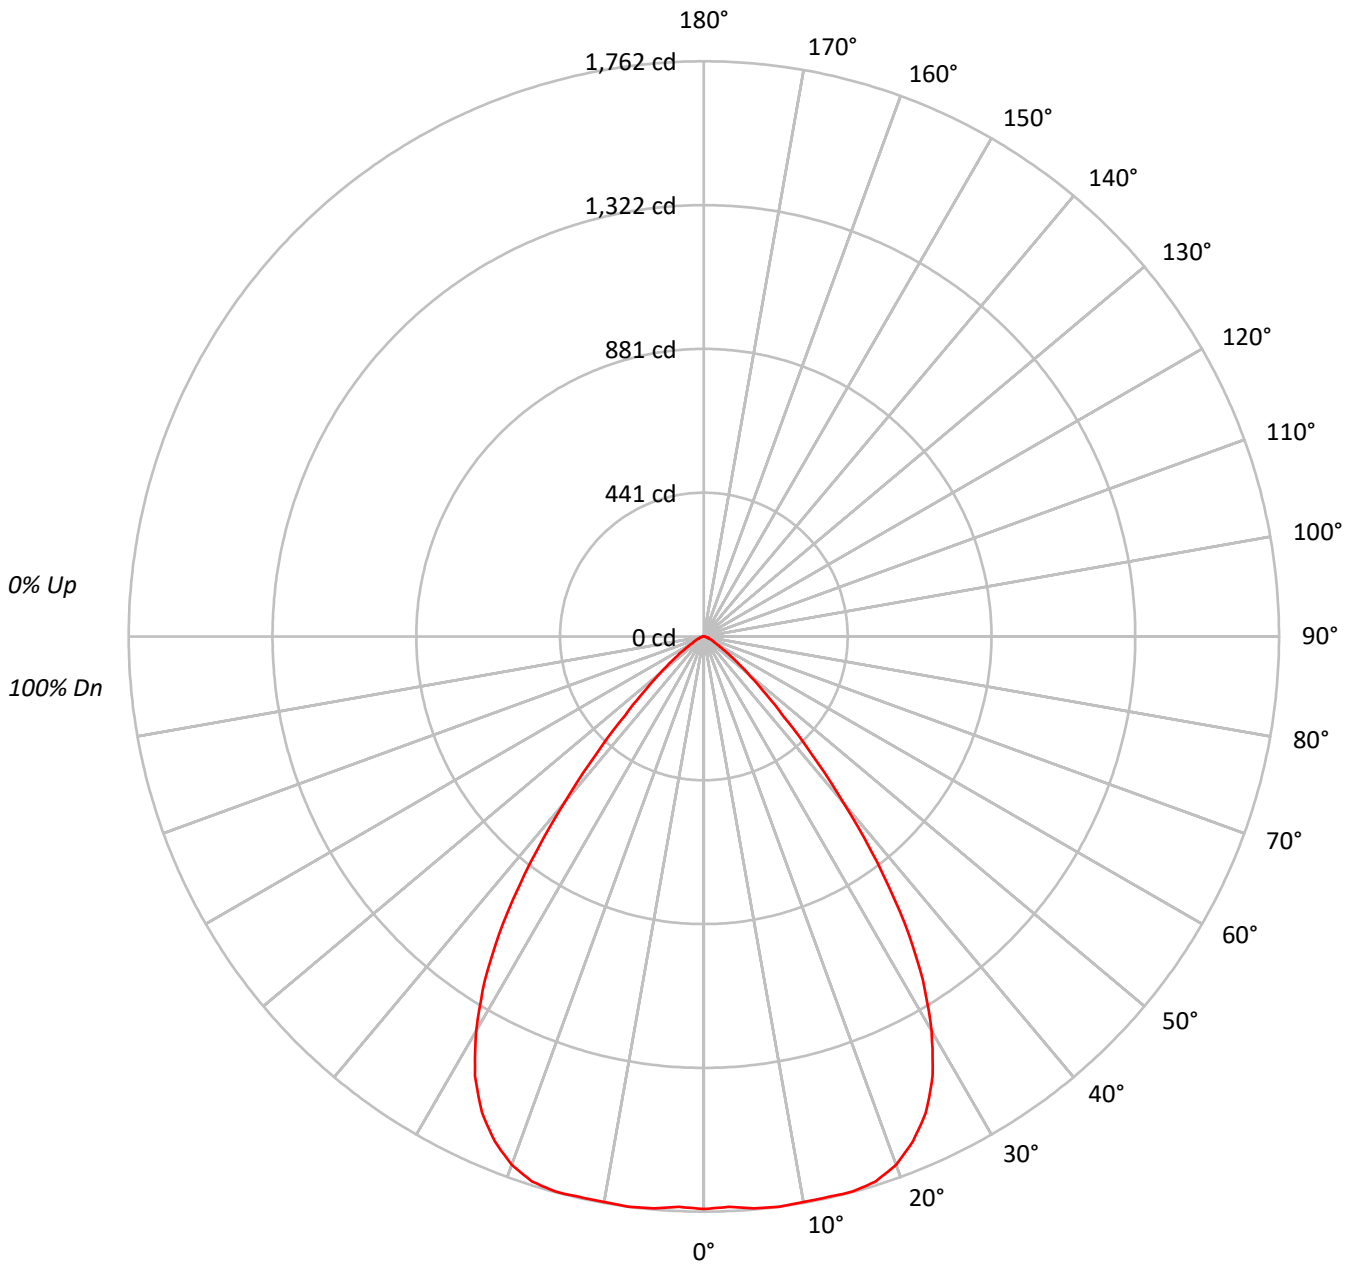



TEST NUMBER: P581994

CATALOG NUMBER: HC625D010-HM60525827-61WDH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	107	105	110	108	105	103	103	101	100	100	98	97	96	95	94	92	92	92	92
2	106	101	96	93	104	99	95	92	96	92	90	93	90	88	90	88	86	84	84	84	84
3	100	93	87	83	98	91	86	82	89	84	81	86	83	80	84	81	78	77	77	77	77
4	94	86	79	75	92	85	79	74	82	77	73	80	76	73	78	75	72	70	70	70	70
5	89	79	73	68	87	78	72	68	76	71	67	75	70	66	73	69	66	64	64	64	64
6	83	73	67	62	82	73	66	62	71	65	61	70	65	61	68	64	60	59	59	59	59
7	79	68	62	57	77	68	61	57	66	60	56	65	60	56	64	59	56	54	54	54	54
8	74	64	57	52	73	63	57	52	62	56	52	61	56	52	60	55	51	50	50	50	50
9	70	59	53	48	69	59	53	48	58	52	48	57	52	48	56	51	48	46	46	46	46
10	66	56	49	45	65	55	49	45	54	49	45	53	48	45	53	48	44	43	43	43	43

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	96144
5°	96781
10°	97900
15°	99915
20°	100470
25°	97336
30°	88311
35°	71795
40°	47661
45°	26522
50°	14874
55°	8248
60°	4550
65°	3450
70°	2388
75°	1758
80°	1073
85°	1006



TEST NUMBER: P581994

CATALOG NUMBER: HC625D010-HM60525827-61WDH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	167.9	6.8
10°-20°	496.4	20.2
20°-30°	731.6	29.8
30°-40°	654.4	26.7
40°-50°	283.9	11.6
50°-60°	83.4	3.4
60°-70°	26.6	1.1
70°-80°	9.4	0.4
80°-90°	1.3	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1395.8	56.9
0°-40°	2050.2	83.5
0°-60°	2417.5	98.5
0°-90°	2454.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2454.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1754	
5°	1759	168
15°	1760	496
25°	1609	732
35°	1073	654
45°	342	284
55°	86	83
65°	27	27
75°	8	9
85°	2	1
90°	0	



TEST NUMBER: P581994

CATALOG NUMBER: HC625D010-HM60525827-61WDH

CANDELA DISTRIBUTION (FULL):

	0°
0°	1753.8
2.5°	1748.8
5°	1758.7
7.5°	1762.1
10°	1758.7
12.5°	1758.7
15°	1760.5
17.5°	1750.4
20°	1722.2
22.5°	1674.0
25°	1609.2
27.5°	1517.9
30°	1395.1
32.5°	1248.9
35°	1072.8
37.5°	872.0
40°	666.0
42.5°	486.7
45°	342.1
47.5°	244.1
50°	174.4
52.5°	124.5
55°	86.3
57.5°	58.1
60°	41.5
62.5°	33.2
65°	26.6
67.5°	19.9
70°	14.9
72.5°	11.7
75°	8.3
77.5°	6.6
80°	3.4
82.5°	1.6
85°	1.6
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)