

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P582061

Luminaire Tested: **HC625D010-HM60525927-61PSMDW**

Issue Date: 9/16/2021

**Test Information**

Test Method: LM-41-14  
Report Number: P582061  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2105-241-12)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 9/16/2021  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: HALO COMMERCIAL  
Catalog Number: HC625D010-HM60525927-61PSMDW  
Description: HALO COMMERCIAL 6" ROUND, NEW CONSTRUCTION FRAME, WITH 6" PLASTIC TRIM  
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1984.9 lumens  
Efficiency: N/A  
Efficacy: 74.1 lumens/watt  
Spacing Criteria (0/90/45): 1.09 / 1.09 / 1.04  
Luminous Opening: Circular (Dia: 0.5' x H: 0')  
CIE Type: Direct


Input Watts (W): 26.8  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P582061

CATALOG NUMBER: HC625D010-HM60525927-61PSMDW

### Luminous Intensity Polar Plot

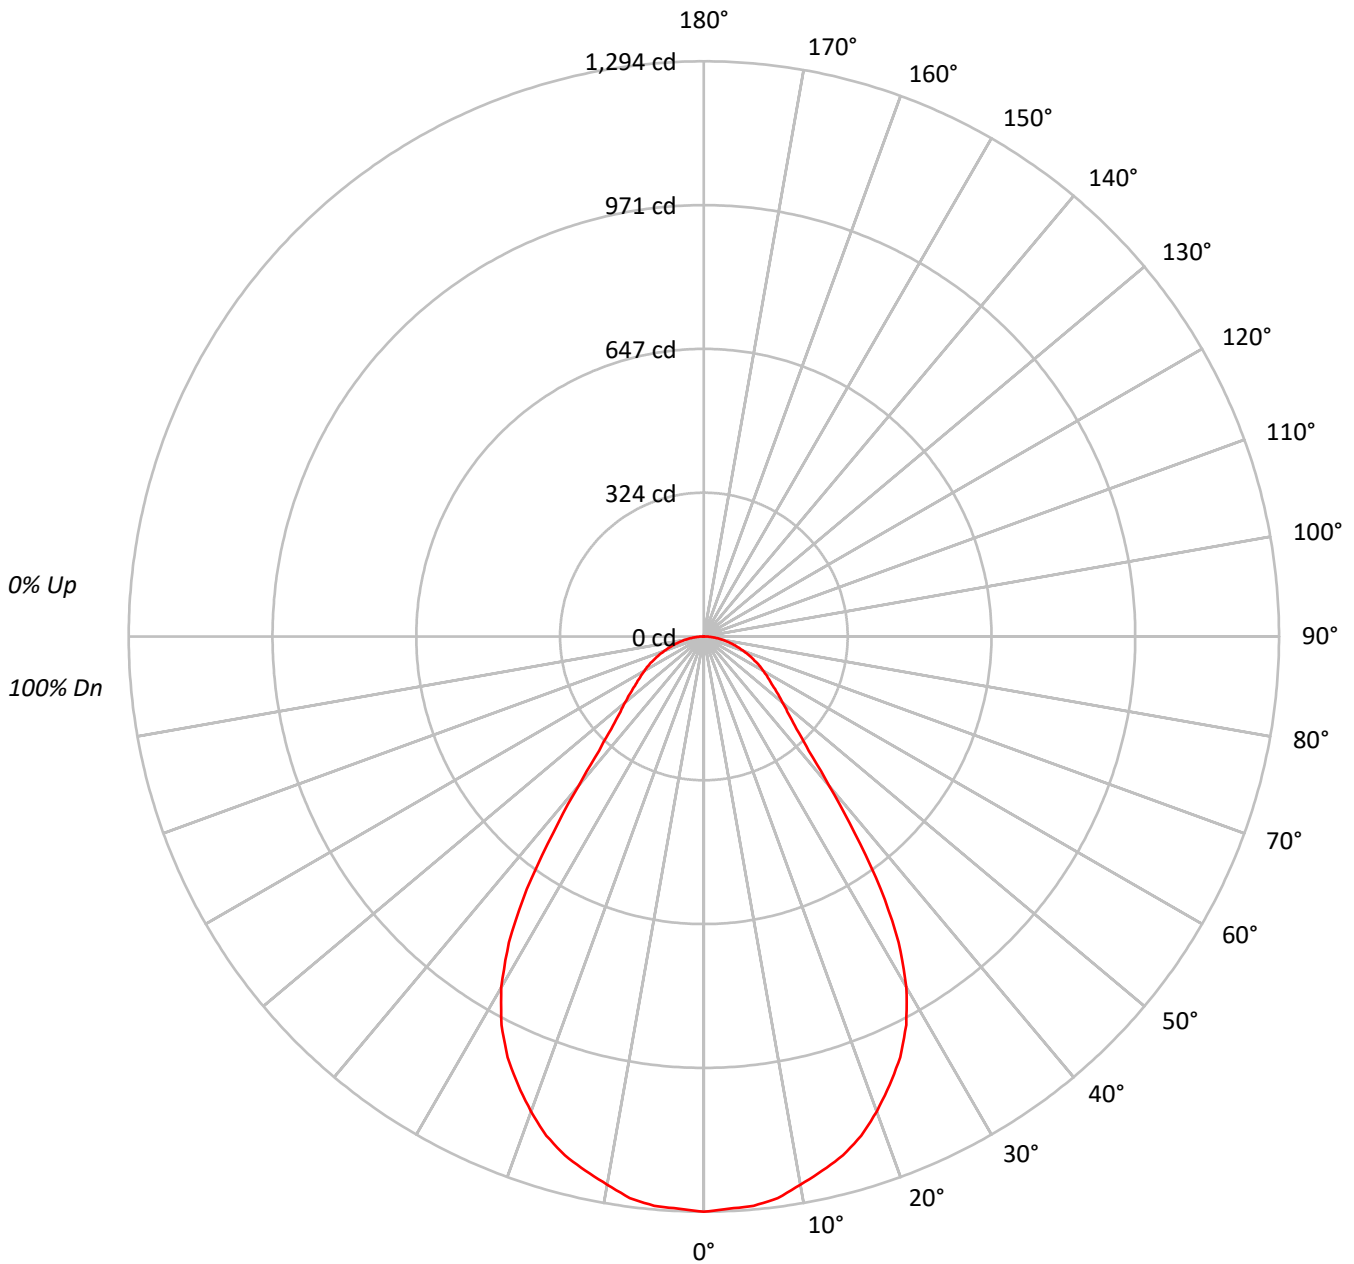



TEST NUMBER: P582061

CATALOG NUMBER: HC625D010-HM60525927-61PSMDW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|---|--|--|--|--|--|--|----|--|--|--|--|--|--|--|--|---|
| RF  | 20  |     |     |     |     |     |     |     |     | 20  |     |     |     |     |     |     |     |     | 20 |    |   |  |  |  |  |  |  | 20 |  |  |  |  |  |  |  |  |   |
| RC  | 80  |     |     |     |     |     |     |     |     | 50  |     |     |     |     |     |     |     |     | 30 |    |   |  |  |  |  |  |  | 10 |  |  |  |  |  |  |  |  | 0 |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30 | 10 | 0 |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| RCR |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 1   | 111 | 107 | 104 | 101 | 108 | 105 | 102 | 99  | 101 | 98  | 96  | 97  | 95  | 93  | 93  | 92  | 90  | 88  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 2   | 103 | 96  | 91  | 86  | 101 | 95  | 90  | 85  | 91  | 87  | 83  | 88  | 85  | 82  | 85  | 82  | 80  | 78  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 3   | 96  | 87  | 81  | 75  | 94  | 86  | 80  | 75  | 83  | 78  | 73  | 80  | 76  | 72  | 78  | 74  | 71  | 69  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 4   | 89  | 80  | 72  | 67  | 87  | 78  | 72  | 66  | 76  | 70  | 65  | 74  | 69  | 65  | 72  | 67  | 64  | 62  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 5   | 84  | 73  | 65  | 60  | 82  | 72  | 65  | 59  | 70  | 64  | 59  | 68  | 63  | 58  | 66  | 62  | 58  | 56  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 6   | 78  | 67  | 59  | 54  | 77  | 66  | 59  | 54  | 64  | 58  | 53  | 63  | 57  | 53  | 61  | 56  | 53  | 51  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 7   | 73  | 62  | 54  | 49  | 72  | 61  | 54  | 49  | 60  | 53  | 49  | 58  | 53  | 48  | 57  | 52  | 48  | 46  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 8   | 69  | 57  | 50  | 45  | 68  | 57  | 50  | 45  | 56  | 49  | 45  | 54  | 49  | 44  | 53  | 48  | 44  | 43  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 9   | 65  | 53  | 46  | 41  | 64  | 53  | 46  | 41  | 52  | 46  | 41  | 51  | 45  | 41  | 50  | 45  | 41  | 39  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 10  | 62  | 50  | 43  | 38  | 60  | 49  | 43  | 38  | 49  | 42  | 38  | 48  | 42  | 38  | 47  | 42  | 38  | 36  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |

**AVERAGE LUMINANCE (cd/sqm):**

|     |       |
|-----|-------|
|     | 0°    |
| 0°  | 70943 |
| 5°  | 70752 |
| 10° | 69699 |
| 15° | 68593 |
| 20° | 66337 |
| 25° | 63185 |
| 30° | 57692 |
| 35° | 46445 |
| 40° | 31302 |
| 45° | 22832 |
| 50° | 19726 |
| 55° | 17815 |
| 60° | 16907 |
| 65° | 16007 |
| 70° | 15067 |
| 75° | 14255 |
| 80° | 13291 |
| 85° | 12391 |



TEST NUMBER: P582061

CATALOG NUMBER: HC625D010-HM60525927-61PSMDW

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 121.7  | 6.1       |
| 10°-20°   | 339.4  | 17.1      |
| 20°-30°   | 476.9  | 24.0      |
| 30°-40°   | 424.5  | 21.4      |
| 40°-50°   | 237.2  | 12.0      |
| 50°-60°   | 169.0  | 8.5       |
| 60°-70°   | 123.0  | 6.2       |
| 70°-80°   | 71.2   | 3.6       |
| 80°-90°   | 22.1   | 1.1       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| 0°-30°    | 938.0  | 47.3      |
| 0°-40°    | 1362.4 | 68.6      |
| 0°-60°    | 1768.6 | 89.1      |
| 0°-90°    | 1984.9 | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 1984.9 | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°   | Flux |
|-----|------|------|
| 0°  | 1294 |      |
| 5°  | 1286 | 122  |
| 15° | 1209 | 339  |
| 25° | 1045 | 477  |
| 35° | 694  | 424  |
| 45° | 294  | 237  |
| 55° | 186  | 169  |
| 65° | 123  | 123  |
| 75° | 67   | 71   |
| 85° | 20   | 22   |
| 90° | 0    |      |



TEST NUMBER: P582061

CATALOG NUMBER: HC625D010-HM60525927-61PSMDW

**CANDELA DISTRIBUTION (FULL):**

|       | 0°     |
|-------|--------|
| 0°    | 1294.1 |
| 2.5°  | 1288.6 |
| 5°    | 1285.7 |
| 7.5°  | 1274.6 |
| 10°   | 1252.1 |
| 12.5° | 1231.1 |
| 15°   | 1208.6 |
| 17.5° | 1177.8 |
| 20°   | 1137.1 |
| 22.5° | 1092.2 |
| 25°   | 1044.6 |
| 27.5° | 985.7  |
| 30°   | 911.4  |
| 32.5° | 816.1  |
| 35°   | 694.0  |
| 37.5° | 556.6  |
| 40°   | 437.4  |
| 42.5° | 349.1  |
| 45°   | 294.5  |
| 47.5° | 258.0  |
| 50°   | 231.3  |
| 52.5° | 207.5  |
| 55°   | 186.4  |
| 57.5° | 169.7  |
| 60°   | 154.2  |
| 62.5° | 140.2  |
| 65°   | 123.4  |
| 67.5° | 109.4  |
| 70°   | 94.0   |
| 72.5° | 79.9   |
| 75°   | 67.3   |
| 77.5° | 54.6   |
| 80°   | 42.1   |
| 82.5° | 30.8   |
| 85°   | 19.7   |
| 87.5° | 9.8    |
| 90°   | 0.0    |



Report Generated By 670245859 / DESKTOP-HRDQ47P







— 0°-180°







(END OF REPORT)