

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P582095

Luminaire Tested: **HC625D010-HM60525935-61NDH**

Issue Date: 9/16/2021

**Test Information**

Test Method: LM-41-14  
Report Number: P582095  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2105-241-2)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 9/16/2021  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: HALO COMMERCIAL  
Catalog Number: HC625D010-HM60525935-61NDH  
Description: HALO COMMERCIAL 6" ROUND, NEW CONSTRUCTION FRAME, WITH 6" NARROW DISTRIBUTION, HAZE TRIM  
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2339.2 lumens  
Efficiency: N/A  
Efficacy: 87.3 lumens/watt  
Spacing Criteria (0/90/45): 0.89 / 0.89 / 0.89  
Luminous Opening: Circular (Dia: 0.5' x H: 0')  
CIE Type: Direct


Input Watts (W): 26.8  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P582095

CATALOG NUMBER: HC625D010-HM60525935-61NDH

### Luminous Intensity Polar Plot

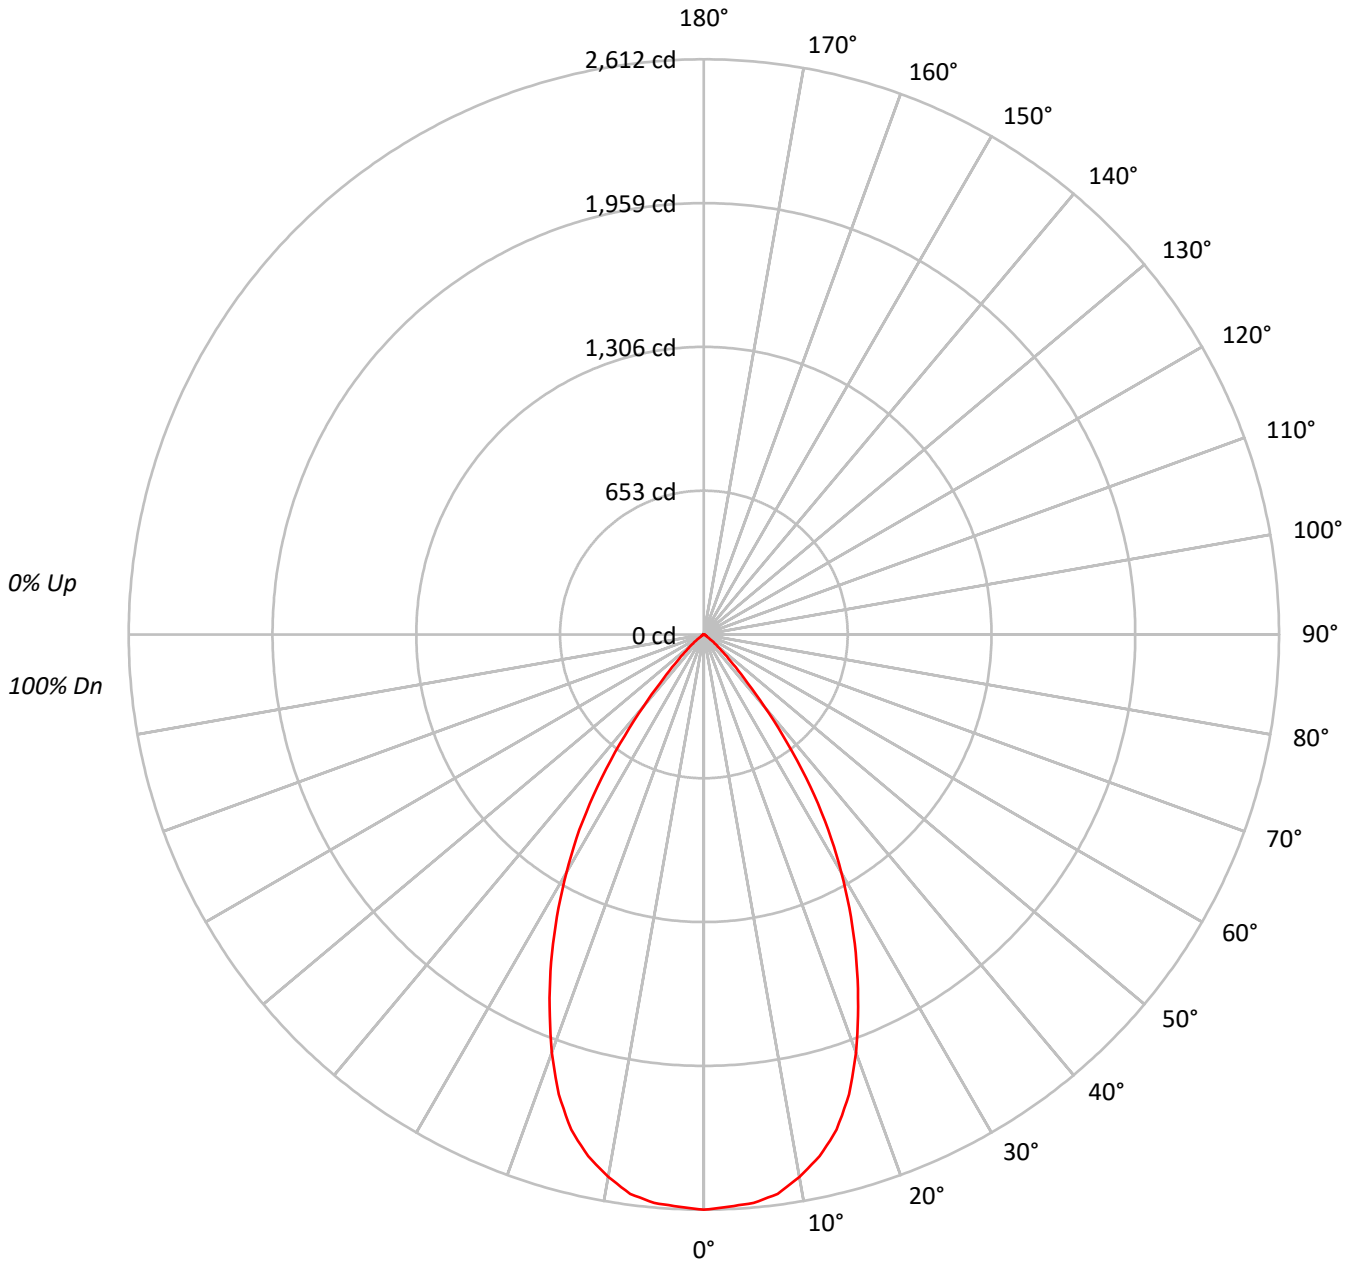



TEST NUMBER: P582095

CATALOG NUMBER: HC625D010-HM60525935-61NDH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	111	108	106	111	109	106	104	105	103	101	101	99	98	97	96	95	93			
2	108	103	99	96	106	101	98	94	98	95	92	95	93	90	92	90	89	87			
3	102	96	91	87	100	95	90	86	92	88	85	90	86	84	87	85	82	81			
4	97	90	84	80	95	88	83	79	86	82	78	84	81	78	82	79	77	75			
5	92	84	78	74	91	83	77	73	81	76	73	79	75	72	78	74	71	70			
6	88	79	73	68	86	78	72	68	76	71	68	75	71	67	74	70	67	65			
7	83	74	68	64	82	73	67	63	72	67	63	71	66	63	70	66	62	61			
8	79	70	64	59	78	69	63	59	68	63	59	67	62	59	66	62	59	57			
9	75	66	60	56	74	65	59	56	64	59	55	63	59	55	62	58	55	54			
10	72	62	56	52	71	62	56	52	61	56	52	60	55	52	59	55	52	51			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	143190
5°	142587
10°	139215
15°	132146
20°	117791
25°	99217
30°	79044
35°	56403
40°	30328
45°	12986
50°	5910
55°	2160
60°	1053
65°	830
70°	785
75°	339
80°	505
85°	0



TEST NUMBER: P582095

CATALOG NUMBER: HC625D010-HM60525935-61NDH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	244.6	10.5
10°-20°	645.4	27.6
20°-30°	747.5	32.0
30°-40°	516.9	22.1
40°-50°	149.3	6.4
50°-60°	25.7	1.1
60°-70°	6.6	0.3
70°-80°	2.6	0.1
80°-90°	0.7	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1637.5	70.0
0°-40°	2154.4	92.1
0°-60°	2329.4	99.6
0°-90°	2339.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2339.2	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2612	
5°	2591	245
15°	2328	645
25°	1640	748
35°	843	517
45°	168	149
55°	23	26
65°	6	7
75°	2	3
85°	0	1
90°	0	



TEST NUMBER: P582095

CATALOG NUMBER: HC625D010-HM60525935-61NDH

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	2612.0
2.5°	2600.7
5°	2591.1
7.5°	2562.0
10°	2500.9
12.5°	2426.7
15°	2328.4
17.5°	2189.9
20°	2019.1
22.5°	1830.5
25°	1640.3
27.5°	1445.3
30°	1248.7
32.5°	1052.3
35°	842.8
37.5°	625.2
40°	423.8
42.5°	267.5
45°	167.5
47.5°	108.0
50°	69.3
52.5°	41.9
55°	22.6
57.5°	12.9
60°	9.6
62.5°	8.0
65°	6.4
67.5°	4.9
70°	4.9
72.5°	3.3
75°	1.6
77.5°	1.6
80°	1.6
82.5°	1.6
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P







— 0°-180°







(END OF REPORT)