

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P582318

Luminaire Tested: **HC635D010-HM63040835-61WDH**

Issue Date: 9/16/2021

Test Information

Test Method: LM-41-14
Report Number: P582318
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2105-241-8)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 9/16/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC635D010-HM63040835-61WDH
Description: HALO COMMERCIAL 6" ROUND, NEW CONSTRUCTION FRAME, WITH 6" WIDE DISTRIBUTION, HAZE TRIM
Light Source: (1) HIGH LUMEN LED 80CRI / 3500K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4005.0 lumens
Efficiency: N/A
Efficacy: 118.8 lumens/watt
Spacing Criteria (0/90/45): 1.18 / 1.18 / 1.08
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct


Input Watts (W): 33.7
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P582318

CATALOG NUMBER: HC635D010-HM63040835-61WDH

Luminous Intensity Polar Plot

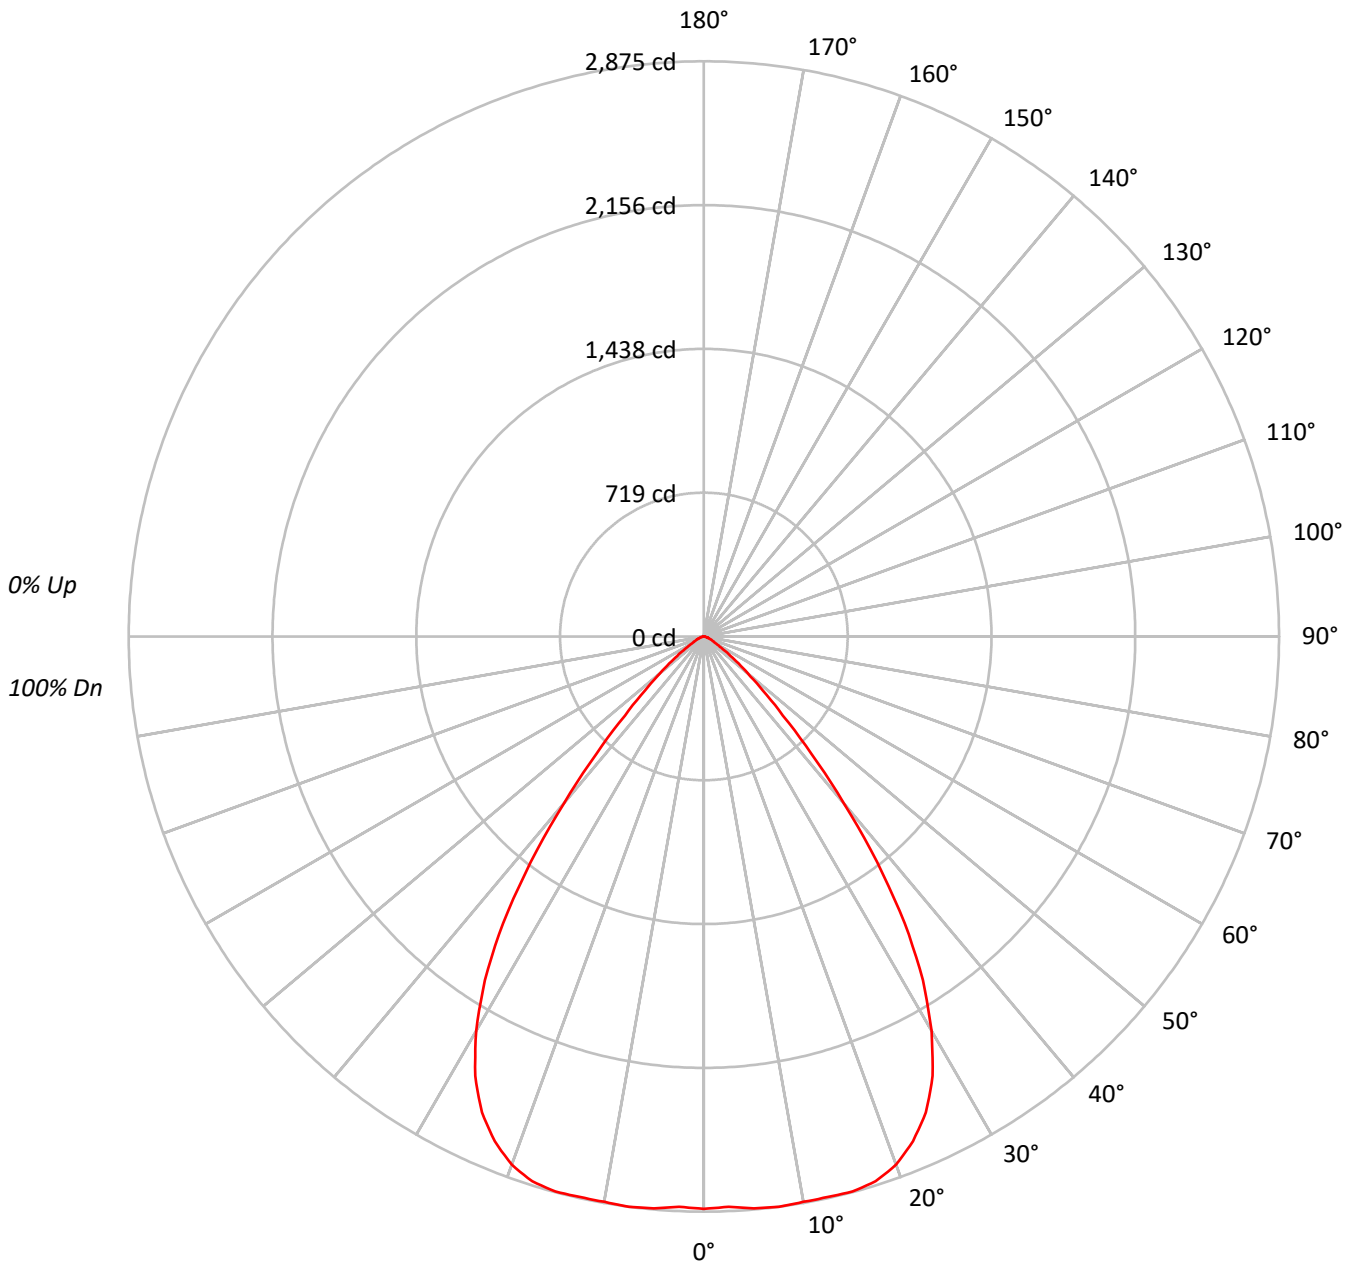



TEST NUMBER: P582318

CATALOG NUMBER: HC635D010-HM63040835-61WDH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	107	105	110	108	105	103	103	101	100	100	98	97	96	95	94	92	92	92	92
2	106	101	96	93	104	99	95	92	96	92	90	93	90	88	90	88	86	84	84	84	84
3	100	93	87	83	98	91	86	82	89	84	81	86	83	80	84	81	78	77	77	77	77
4	94	86	79	75	92	85	79	74	82	77	73	80	76	72	78	75	72	70	70	70	70
5	89	79	73	68	87	78	72	68	76	71	67	75	70	66	73	69	66	64	64	64	64
6	83	73	67	62	82	73	66	62	71	65	61	70	65	61	68	64	60	59	59	59	59
7	79	68	62	57	77	68	61	57	66	60	56	65	60	56	64	59	56	54	54	54	54
8	74	64	57	52	73	63	57	52	62	56	52	61	56	52	60	55	51	50	50	50	50
9	70	59	53	48	69	59	53	48	58	52	48	57	52	48	56	51	48	46	46	46	46
10	66	56	49	45	65	55	49	45	54	49	45	53	48	45	53	48	44	43	43	43	43

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	156846
5°	157896
10°	159722
15°	162998
20°	163913
25°	158804
30°	144066
35°	117135
40°	77753
45°	43276
50°	24264
55°	13467
60°	7423
65°	5617
70°	3911
75°	2859
80°	1705
85°	1698



TEST NUMBER: P582318

CATALOG NUMBER: HC635D010-HM63040835-61WDH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	273.9	6.8
10°-20°	809.8	20.2
20°-30°	1193.5	29.8
30°-40°	1067.6	26.7
40°-50°	463.2	11.6
50°-60°	136.1	3.4
60°-70°	43.4	1.1
70°-80°	15.3	0.4
80°-90°	2.2	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2277.2	56.9
0°-40°	3344.8	83.5
0°-60°	3944.0	98.5
0°-90°	4005.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4005.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2861	
5°	2869	274
15°	2872	810
25°	2625	1194
35°	1750	1068
45°	558	463
55°	141	136
65°	43	43
75°	14	15
85°	3	2
90°	0	



TEST NUMBER: P582318

CATALOG NUMBER: HC635D010-HM63040835-61WDH

CANDELA DISTRIBUTION (FULL):

	0°
0°	2861.1
2.5°	2853.1
5°	2869.3
7.5°	2874.7
10°	2869.3
12.5°	2869.3
15°	2872.0
17.5°	2855.8
20°	2809.7
22.5°	2731.1
25°	2625.4
27.5°	2476.4
30°	2275.9
32.5°	2037.5
35°	1750.3
37.5°	1422.5
40°	1086.5
42.5°	793.9
45°	558.2
47.5°	398.3
50°	284.5
52.5°	203.2
55°	140.9
57.5°	94.9
60°	67.7
62.5°	54.1
65°	43.3
67.5°	32.6
70°	24.4
72.5°	19.0
75°	13.5
77.5°	10.9
80°	5.4
82.5°	2.7
85°	2.7
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)