

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P582327

Luminaire Tested: **HC635D010-HM63040840-61MDW**

Issue Date: 9/16/2021

Test Information

Test Method: LM-41-14
Report Number: P582327
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2105-241-6)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 9/16/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC635D010-HM63040840-61MDW
Description: HALO COMMERCIAL 6" ROUND, NEW CONSTRUCTION FRAME, WITH 6" MEDIUM DISTRIBUTION, WHITE TRIM
Light Source: (1) HIGH LUMEN LED 80CRI / 4000K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3929.3 lumens
Efficiency: N/A
Efficacy: 116.6 lumens/watt
Spacing Criteria (0/90/45): 1.08 / 1.08 / 1.03
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct


Input Watts (W): 33.7
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P582327

CATALOG NUMBER: HC635D010-HM63040840-61MDW

Luminous Intensity Polar Plot

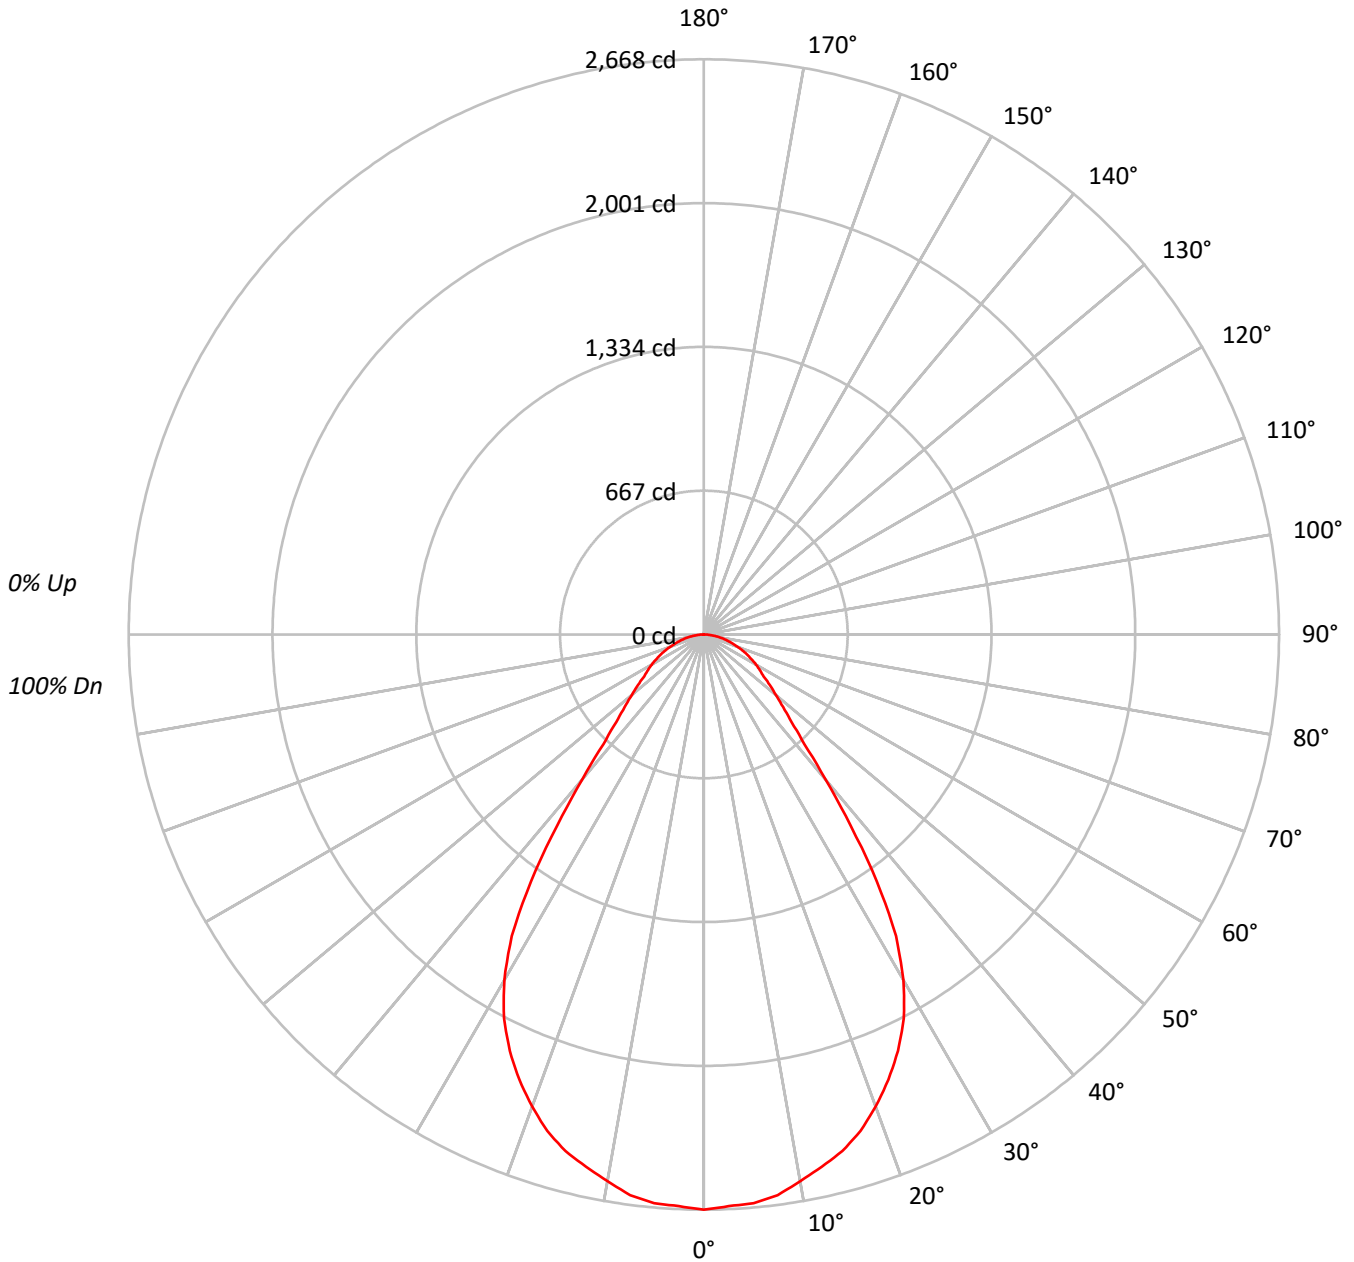



TEST NUMBER: P582327

CATALOG NUMBER: HC635D010-HM63040840-61MDW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	111	108	104	101	109	105	102	100	101	99	96	97	95	94	94	92	91	89			89
2	104	97	92	87	101	95	90	86	92	88	84	89	85	82	86	83	81	79			79
3	97	88	82	76	94	87	81	76	84	79	75	81	77	73	79	75	72	70			70
4	90	80	73	68	88	79	73	67	77	71	67	75	70	66	73	68	65	63			63
5	84	74	66	61	82	73	66	61	71	65	60	69	64	59	67	63	59	57			57
6	79	68	61	55	77	67	60	55	65	59	55	64	58	54	62	58	54	52			52
7	74	63	55	50	73	62	55	50	61	54	50	59	54	50	58	53	49	48			48
8	70	58	51	46	69	58	51	46	57	50	46	55	50	46	54	49	45	44			44
9	66	54	47	43	65	54	47	42	53	47	42	52	46	42	51	46	42	40			40
10	62	51	44	39	61	50	44	39	49	43	39	49	43	39	48	43	39	37			37

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	146271
5°	145735
10°	143301
15°	140778
20°	135911
25°	128874
30°	117221
35°	93666
40°	62496
45°	44547
50°	37116
55°	32352
60°	30568
65°	28771
70°	26447
75°	24697
80°	22446
85°	19687



TEST NUMBER: P582327

CATALOG NUMBER: HC635D010-HM63040840-61MDW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	250.5	6.4
10°-20°	696.5	17.7
20°-30°	973.3	24.8
30°-40°	857.3	21.8
40°-50°	463.2	11.8
50°-60°	309.7	7.9
60°-70°	219.5	5.6
70°-80°	123.4	3.1
80°-90°	36.0	0.9
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1920.2	48.9
0°-40°	2777.5	70.7
0°-60°	3550.4	90.4
0°-90°	3929.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3929.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2668	
5°	2648	250
15°	2480	696
25°	2131	973
35°	1400	857
45°	575	463
55°	338	310
65°	222	220
75°	117	123
85°	31	36
90°	0	



TEST NUMBER: P582327

CATALOG NUMBER: HC635D010-HM63040840-61MDW

CANDELA DISTRIBUTION (FULL):

	0°
0°	2668.2
2.5°	2654.0
5°	2648.3
7.5°	2622.7
10°	2574.3
12.5°	2528.8
15°	2480.5
17.5°	2415.0
20°	2329.7
22.5°	2235.9
25°	2130.6
27.5°	2008.3
30°	1851.8
32.5°	1658.4
35°	1399.6
37.5°	1117.9
40°	873.3
42.5°	688.4
45°	574.6
47.5°	497.8
50°	435.2
52.5°	384.1
55°	338.5
57.5°	307.3
60°	278.8
62.5°	250.3
65°	221.8
67.5°	193.5
70°	165.0
72.5°	139.3
75°	116.6
77.5°	93.8
80°	71.1
82.5°	51.2
85°	31.3
87.5°	14.2
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)