

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P582460

Luminaire Tested: **HC640D010-HM63040835-61WDBB**

Issue Date: 9/16/2021

Test Information

Test Method: LM-41-14
Report Number: P582460
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2105-241-11)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 9/16/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC640D010-HM63040835-61WDBB
Description: HALO COMMERCIAL 6" ROUND, NEW CONSTRUCTION FRAME, WITH 6" WIDE DISTRIBUTION, BLACK BAFFLE TRIM
Light Source: (1) HIGH LUMEN LED 80CRI / 3500K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4150.8 lumens
Efficiency: N/A
Efficacy: 101.2 lumens/watt
Spacing Criteria (0/90/45): 1.32 / 1.32 / 1.14
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct


Input Watts (W): 41
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P582460

CATALOG NUMBER: HC640D010-HM63040835-61WDBB

Luminous Intensity Polar Plot

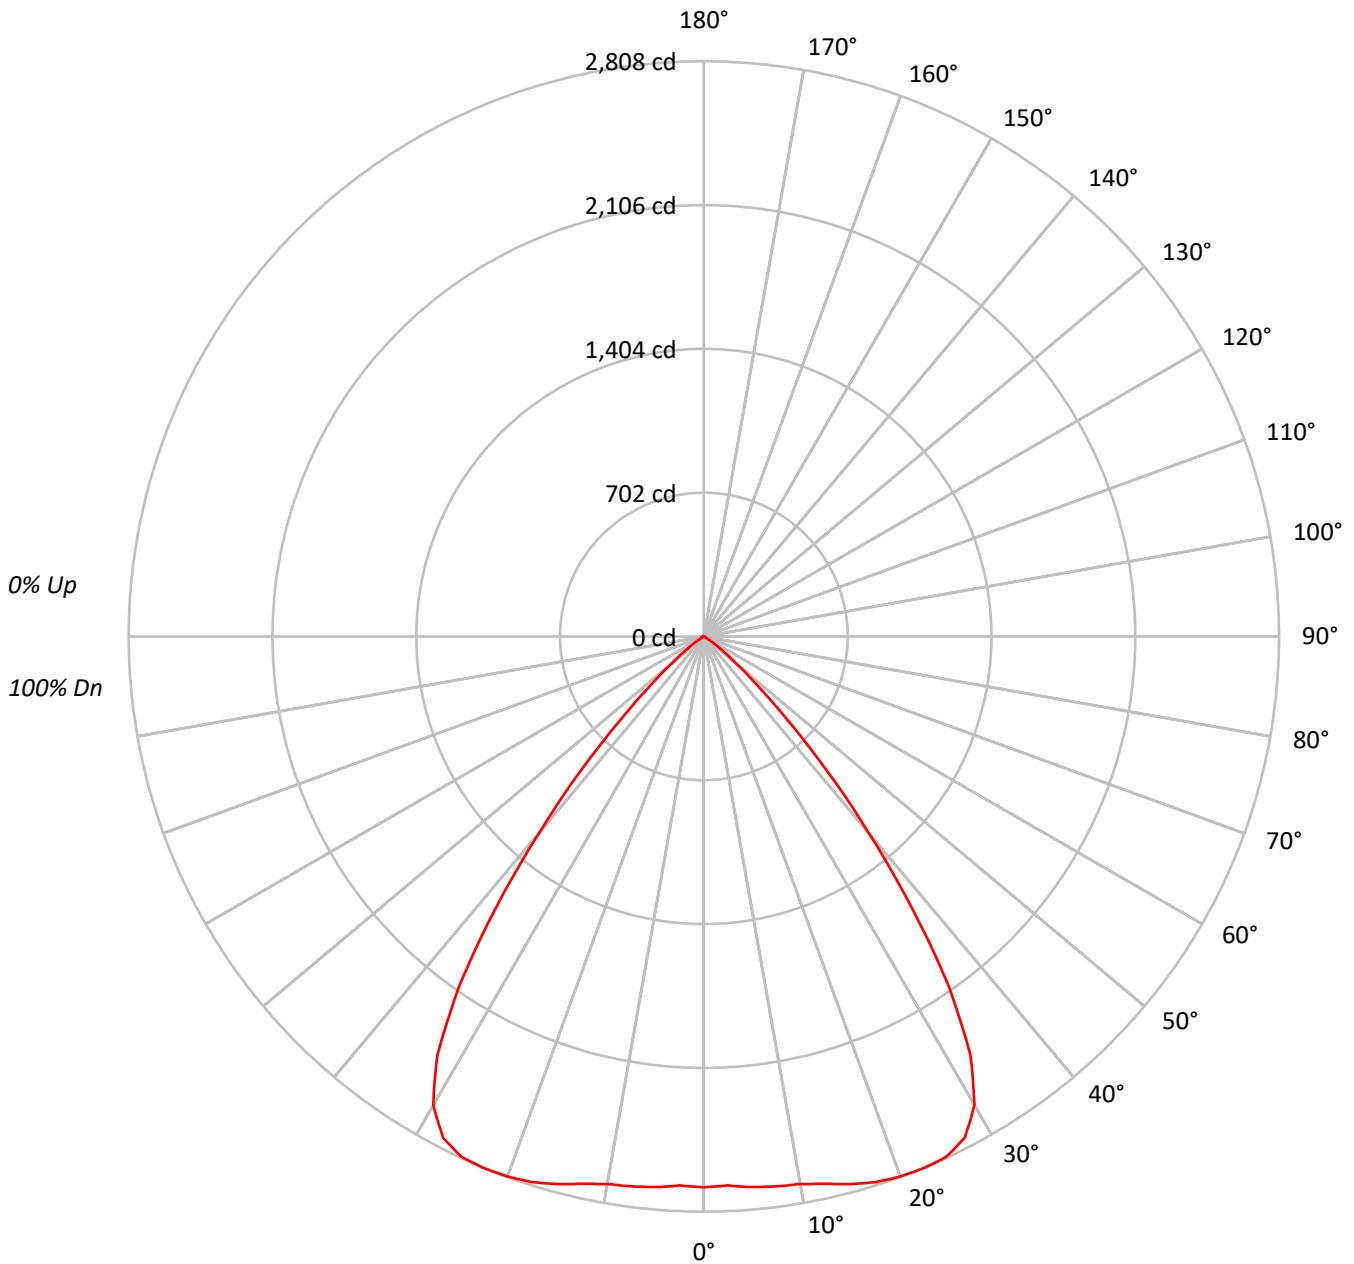



TEST NUMBER: P582460

CATALOG NUMBER: HC640D010-HM63040835-61WDBB

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	107	105	110	108	105	103	104	102	100	100	98	97	97	95	94	92	92	92	92
2	107	101	97	93	104	100	95	92	96	93	90	93	90	88	90	88	86	85	85	85	85
3	100	93	88	83	98	92	87	83	89	85	81	87	83	80	84	81	79	77	77	77	77
4	95	86	80	75	93	85	79	75	83	78	74	81	77	73	79	75	72	71	71	71	71
5	89	80	73	68	87	79	73	68	77	72	67	75	70	67	73	69	66	65	65	65	65
6	84	74	67	62	82	73	67	62	71	66	62	70	65	61	69	64	61	59	59	59	59
7	79	68	62	57	77	68	61	57	66	61	57	65	60	56	64	59	56	54	54	54	54
8	74	64	57	52	73	63	57	52	62	56	52	61	56	52	60	55	52	50	50	50	50
9	70	59	53	48	69	59	53	48	58	52	48	57	52	48	56	51	48	46	46	46	46
10	66	56	49	45	65	55	49	45	54	48	45	53	48	44	53	48	44	43	43	43	43

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	147406
5°	148492
10°	151083
15°	157067
20°	163663
25°	169498
30°	167228
35°	139334
40°	89353
45°	44617
50°	17705
55°	6012
60°	1721
65°	1232
70°	1010
75°	1334
80°	1010
85°	0



TEST NUMBER: P582460

CATALOG NUMBER: HC640D010-HM63040835-61WDBB

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	258.0	6.2
10°-20°	785.0	18.9
20°-30°	1281.7	30.9
30°-40°	1256.4	30.3
40°-50°	481.7	11.6
50°-60°	70.7	1.7
60°-70°	10.5	0.3
70°-80°	5.4	0.1
80°-90°	1.3	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2324.7	56.0
0°-40°	3581.1	86.3
0°-60°	4133.6	99.6
0°-90°	4150.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4150.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2689	
5°	2698	258
15°	2768	785
25°	2802	1282
35°	2082	1256
45°	576	482
55°	63	71
65°	10	10
75°	6	5
85°	0	1
90°	0	



TEST NUMBER: P582460

CATALOG NUMBER: HC640D010-HM63040835-61WDBB

CANDELA DISTRIBUTION (FULL):

0°	
0°	2688.9
2.5°	2682.7
5°	2698.4
7.5°	2707.8
10°	2714.1
12.5°	2736.1
15°	2767.5
17.5°	2792.7
20°	2805.4
22.5°	2808.4
25°	2802.2
27.5°	2758.2
30°	2641.8
32.5°	2421.7
35°	2082.0
37.5°	1663.7
40°	1248.6
42.5°	890.1
45°	575.5
47.5°	352.2
50°	207.6
52.5°	119.5
55°	62.9
57.5°	28.4
60°	15.7
62.5°	12.5
65°	9.5
67.5°	9.5
70°	6.3
72.5°	6.3
75°	6.3
77.5°	3.2
80°	3.2
82.5°	3.2
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)