

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P582462

Luminaire Tested: **HC640D010-HM63040835-61WDH**

Issue Date: 9/16/2021

**Test Information**

Test Method: LM-41-14  
Report Number: P582462  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2105-241-8)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 9/16/2021  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: HALO COMMERCIAL  
Catalog Number: HC640D010-HM63040835-61WDH  
Description: HALO COMMERCIAL 6" ROUND, NEW CONSTRUCTION FRAME, WITH 6" WIDE DISTRIBUTION, HAZE TRIM  
Light Source: (1) HIGH LUMEN LED 80CRI / 3500K CCT  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4650.7 lumens  
Efficiency: N/A  
Efficacy: 113.4 lumens/watt  
Spacing Criteria (0/90/45): 1.18 / 1.18 / 1.08  
Luminous Opening: Circular (Dia: 0.5' x H: 0')  
CIE Type: Direct


Input Watts (W): 41  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P582462

CATALOG NUMBER: HC640D010-HM63040835-61WDH

### Luminous Intensity Polar Plot

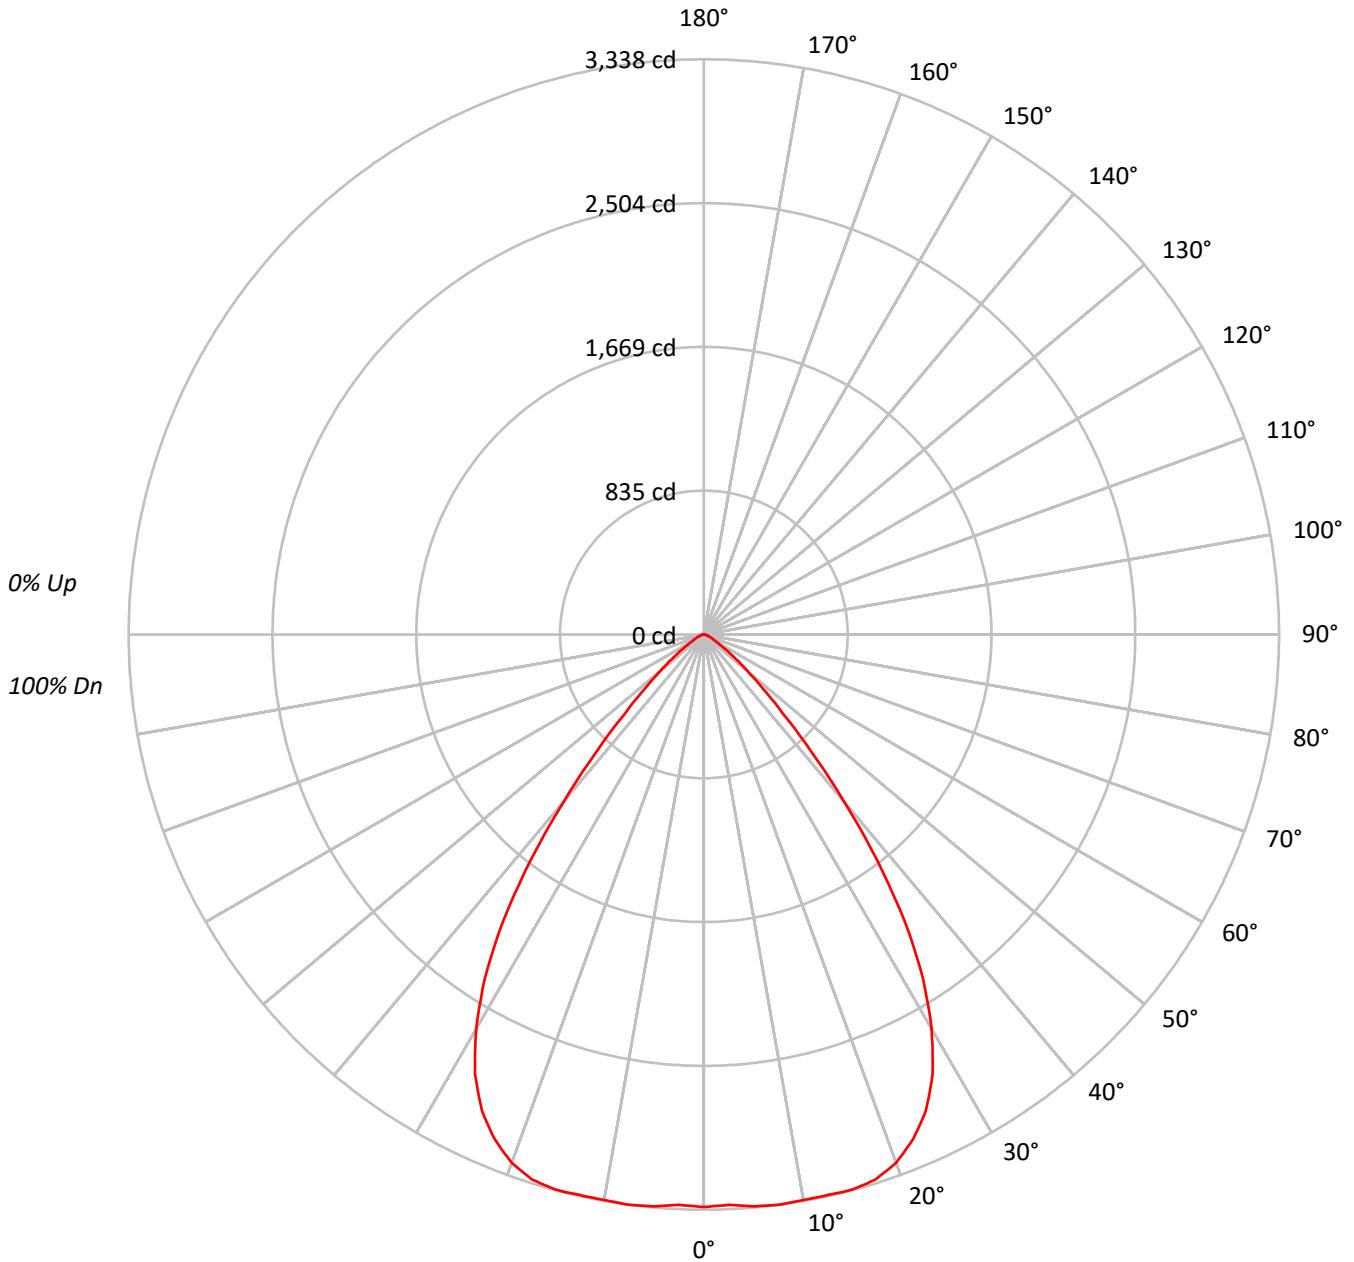



TEST NUMBER: P582462

CATALOG NUMBER: HC640D010-HM63040835-61WDH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	107	105	110	108	105	103	103	101	100	100	98	97	96	95	94	92	92	92	92
2	106	101	96	93	104	99	95	92	96	92	90	93	90	88	90	88	86	84	84	84	84
3	100	93	87	83	98	91	86	82	89	84	81	86	83	80	84	81	78	77	77	77	77
4	94	86	79	75	92	85	79	74	82	77	73	80	76	72	78	75	72	70	70	70	70
5	89	79	73	68	87	78	72	68	76	71	67	75	70	66	73	69	66	64	64	64	64
6	83	73	67	62	82	73	66	62	71	65	61	70	65	61	68	64	60	59	59	59	59
7	79	68	62	57	77	68	61	57	66	60	56	65	60	56	64	59	56	54	54	54	54
8	74	64	57	52	73	63	57	52	62	56	52	61	56	52	60	55	51	50	50	50	50
9	70	59	53	48	69	59	53	48	58	52	48	57	52	48	56	51	48	46	46	46	46
10	66	56	49	45	65	55	49	45	54	49	45	53	48	45	53	48	44	43	43	43	43

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	182135
5°	183353
10°	185473
15°	189280
20°	190341
25°	184408
30°	167298
35°	136014
40°	90283
45°	50253
50°	28178
55°	15636
60°	8618
65°	6538
70°	4552
75°	3325
80°	1989
85°	2013



TEST NUMBER: P582462

CATALOG NUMBER: HC640D010-HM63040835-61WDH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	318.0	6.8
10°-20°	940.4	20.2
20°-30°	1386.0	29.8
30°-40°	1239.7	26.7
40°-50°	537.8	11.6
50°-60°	158.0	3.4
60°-70°	50.4	1.1
70°-80°	17.8	0.4
80°-90°	2.6	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2644.4	56.9
0°-40°	3884.0	83.5
0°-60°	4579.8	98.5
0°-90°	4650.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4650.7	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	3322	
5°	3332	318
15°	3335	940
25°	3049	1386
35°	2032	1240
45°	648	538
55°	164	158
65°	50	50
75°	16	18
85°	3	3
90°	0	



TEST NUMBER: P582462

CATALOG NUMBER: HC640D010-HM63040835-61WDH

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	3322.4
2.5°	3313.1
5°	3331.9
7.5°	3338.1
10°	3331.9
12.5°	3331.9
15°	3335.1
17.5°	3316.1
20°	3262.7
22.5°	3171.4
25°	3048.7
27.5°	2875.7
30°	2642.9
32.5°	2366.0
35°	2032.4
37.5°	1651.8
40°	1261.6
42.5°	921.8
45°	648.2
47.5°	462.4
50°	330.4
52.5°	236.0
55°	163.6
57.5°	110.1
60°	78.6
62.5°	62.9
65°	50.4
67.5°	37.7
70°	28.4
72.5°	22.0
75°	15.7
77.5°	12.5
80°	6.3
82.5°	3.2
85°	3.2
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P







— 0°-180°







(END OF REPORT)