

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P582479

Luminaire Tested: **HC640D010-HM63040840-61WDC**

Issue Date: 9/16/2021

Test Information

Test Method: LM-41-14
Report Number: P582479
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2105-241-7)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 9/16/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC640D010-HM63040840-61WDC
Description: HALO COMMERCIAL 6" ROUND, NEW CONSTRUCTION FRAME, WITH 6" WIDE DISTRIBUTION, SPECULAR TRIM
Light Source: (1) HIGH LUMEN LED 80CRI / 4000K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 5329.2 lumens
Efficiency: N/A
Efficacy: 130.0 lumens/watt
Spacing Criteria (0/90/45): 1.28 / 1.28 / 1.09
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 41
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P582479
CATALOG NUMBER: HC640D010-HM63040840-61WDC

Luminous Intensity Polar Plot

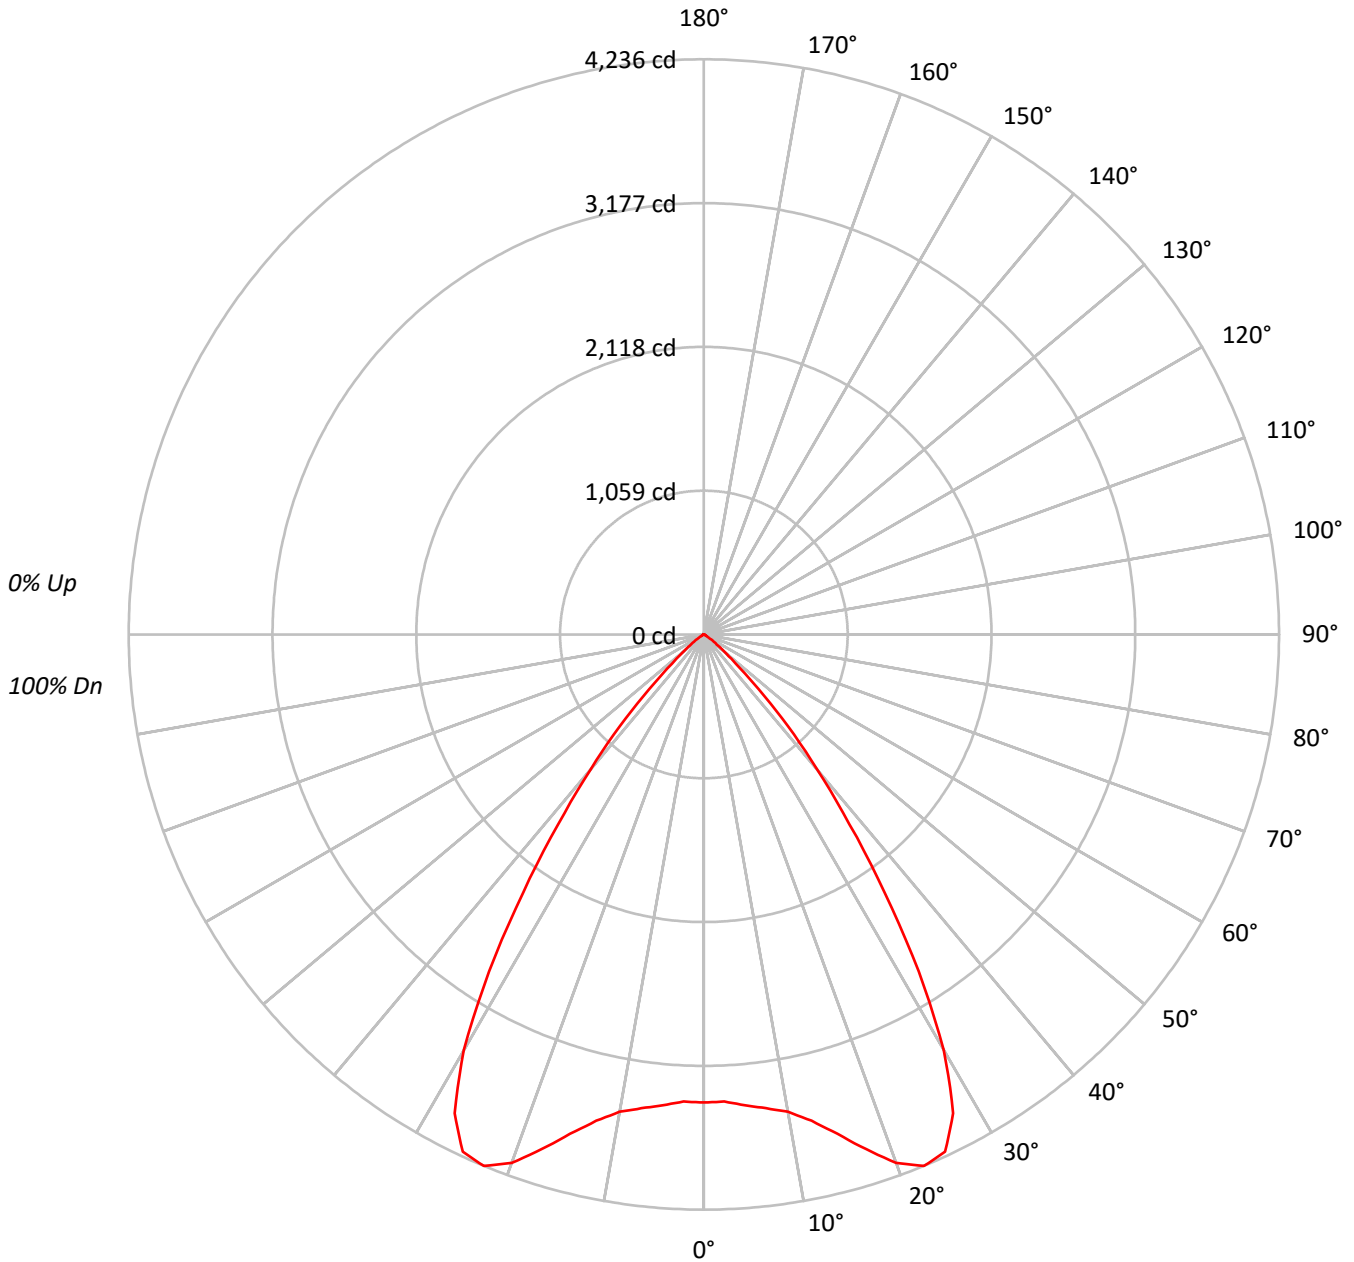



TEST NUMBER: P582479

CATALOG NUMBER: HC640D010-HM63040840-61WDC

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	108	105	111	108	106	103	104	102	100	100	99	97	97	96	94	93	93	93	93
2	107	102	97	94	105	100	96	93	97	94	91	94	91	89	91	89	87	85	85	85	85
3	101	94	89	85	99	93	88	84	90	86	82	88	84	81	85	82	80	78	78	78	78
4	95	87	81	77	93	86	80	76	84	79	75	82	78	74	80	76	74	72	72	72	72
5	90	81	75	70	88	80	74	70	78	73	69	76	72	68	75	71	68	66	66	66	66
6	85	75	69	64	83	74	68	64	73	67	63	71	67	63	70	66	62	61	61	61	61
7	80	70	63	59	79	69	63	59	68	62	58	67	62	58	66	61	58	56	56	56	56
8	76	65	59	54	74	65	59	54	64	58	54	62	57	54	61	57	53	52	52	52	52
9	71	61	55	50	70	60	54	50	60	54	50	59	53	50	58	53	50	48	48	48	48
10	68	57	51	47	67	57	51	47	56	50	46	55	50	46	54	50	46	45	45	45	45

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	188932
5°	191475
10°	198655
15°	216040
20°	241539
25°	254234
30°	223813
35°	155235
40°	92695
45°	44067
50°	16622
55°	6948
60°	2171
65°	1712
70°	1058
75°	699
80°	1042
85°	0



TEST NUMBER: P582479

CATALOG NUMBER: HC640D010-HM63040840-61WDC

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	334.9	6.3
10°-20°	1093.0	20.5
20°-30°	1873.0	35.1
30°-40°	1454.6	27.3
40°-50°	480.9	9.0
50°-60°	73.8	1.4
60°-70°	13.0	0.2
70°-80°	4.8	0.1
80°-90°	1.3	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3300.9	61.9
0°-40°	4755.5	89.2
0°-60°	5310.1	99.6
0°-90°	5329.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5329.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3446	
5°	3480	335
15°	3807	1093
25°	4203	1873
35°	2320	1455
45°	568	481
55°	73	74
65°	13	13
75°	3	5
85°	0	1
90°	0	



TEST NUMBER: P582479

CATALOG NUMBER: HC640D010-HM63040840-61WDC

CANDELA DISTRIBUTION (FULL):

0°	
0°	3446.4
2.5°	3443.1
5°	3479.5
7.5°	3519.1
10°	3568.7
12.5°	3667.9
15°	3806.6
17.5°	3975.1
20°	4140.3
22.5°	4236.2
25°	4203.1
27.5°	3975.1
30°	3535.7
32.5°	2944.1
35°	2319.6
37.5°	1761.3
40°	1295.3
42.5°	915.3
45°	568.4
47.5°	317.2
50°	194.9
52.5°	119.0
55°	72.7
57.5°	36.4
60°	19.8
62.5°	16.5
65°	13.2
67.5°	9.9
70°	6.6
72.5°	6.6
75°	3.3
77.5°	3.3
80°	3.3
82.5°	3.3
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)