

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P582490

Luminaire Tested: **HC640D010-HM63040927-61NDC**

Issue Date: 9/16/2021

Test Information

Test Method: LM-41-14
Report Number: P582490
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2105-241-1)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 9/16/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC640D010-HM63040927-61NDC
Description: HALO COMMERCIAL 6" ROUND, NEW CONSTRUCTION FRAME, WITH 6" NARROW DISTRIBUTION, SPECULAR TRIM
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3632.1 lumens
Efficiency: N/A
Efficacy: 88.6 lumens/watt
Spacing Criteria (0/90/45): 0.93 / 0.93 / 0.88
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct


Input Watts (W): 41
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P582490

CATALOG NUMBER: HC640D010-HM63040927-61NDC

Luminous Intensity Polar Plot

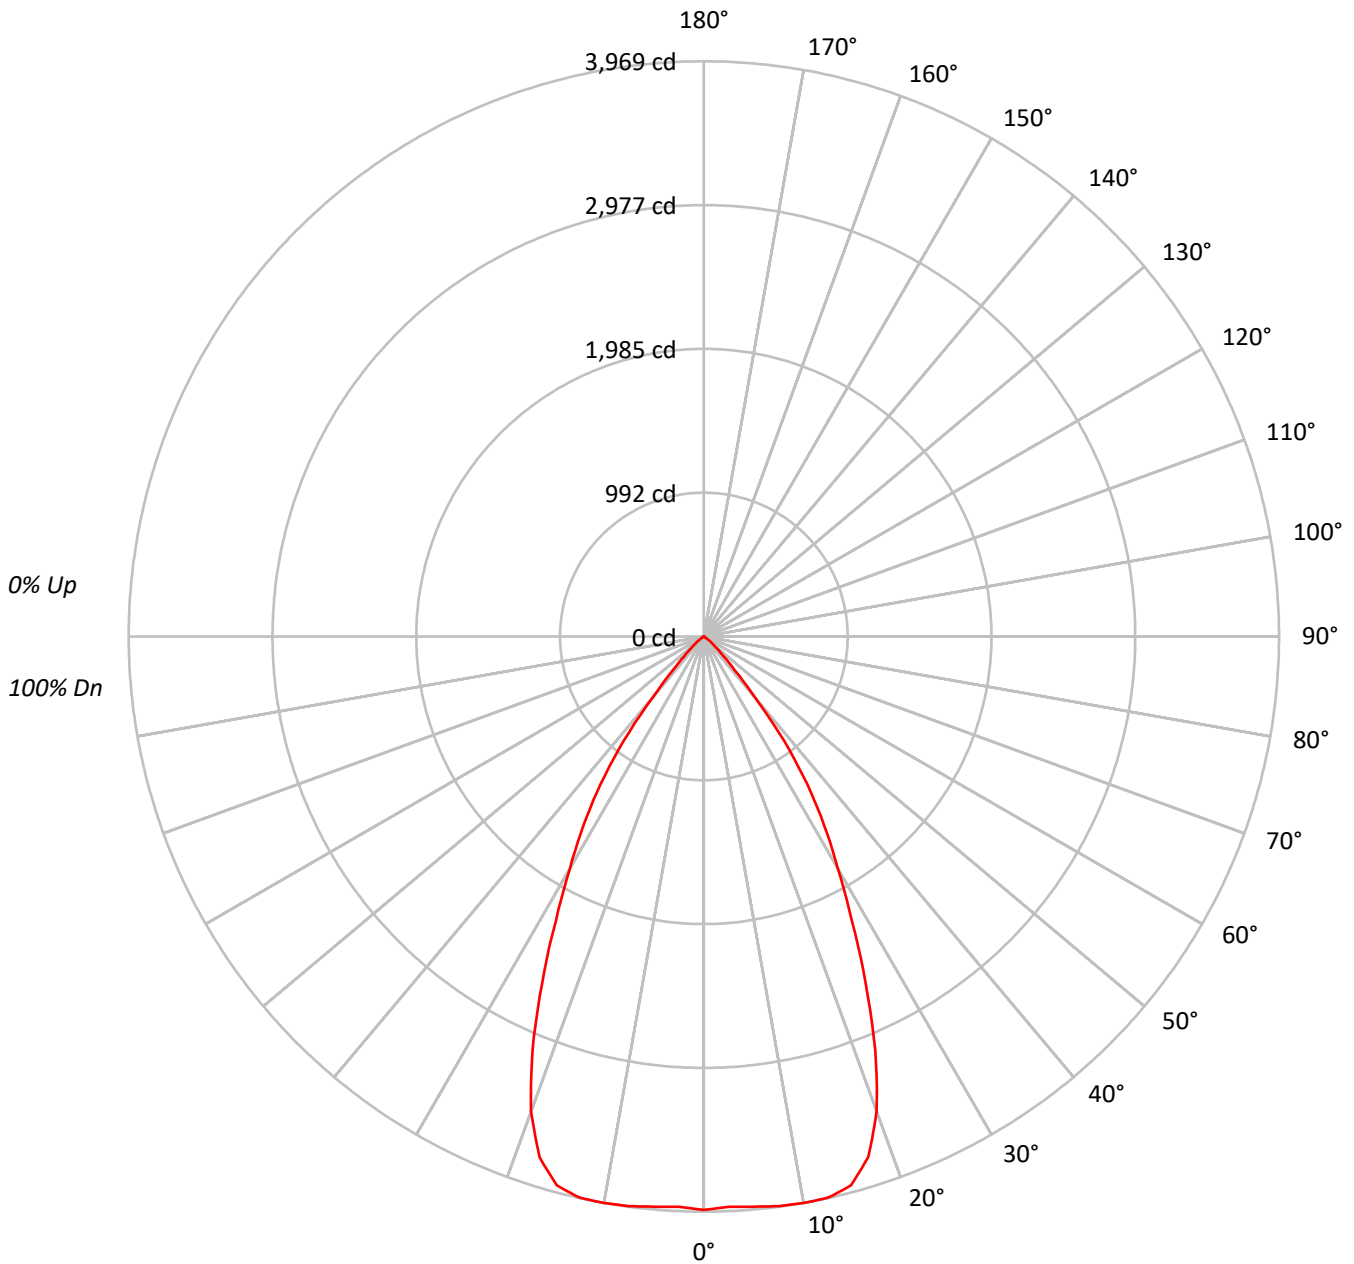



TEST NUMBER: P582490

CATALOG NUMBER: HC640D010-HM63040927-61NDC

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	114	111	108	106	111	109	107	105	105	103	101	101	100	98	98	97	96	94			94
2	108	103	99	96	106	102	98	95	98	96	93	96	93	91	93	91	89	87			87
3	103	97	92	88	101	95	91	87	93	89	86	90	87	84	88	85	83	82			82
4	98	90	85	81	96	89	84	80	87	83	79	85	81	79	83	80	78	76			76
5	93	85	79	75	91	84	79	75	82	77	74	80	76	73	79	75	73	71			71
6	88	80	74	70	87	79	73	69	77	73	69	76	72	68	75	71	68	67			67
7	84	75	69	65	83	74	69	65	73	68	64	72	67	64	71	67	64	62			62
8	80	71	65	61	79	70	65	61	69	64	60	68	64	60	67	63	60	59			59
9	76	67	61	57	75	66	61	57	65	60	57	65	60	57	64	60	56	55			55
10	73	63	58	54	72	63	57	54	62	57	54	61	57	53	61	56	53	52			52

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	216918
5°	217345
10°	220921
15°	222532
20°	203420
25°	159844
30°	117005
35°	83005
40°	39259
45°	14978
50°	6712
55°	1826
60°	778
65°	610
70°	385
75°	508
80°	0
85°	0



TEST NUMBER: P582490

CATALOG NUMBER: HC640D010-HM63040927-61NDC

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	377.8	10.4
10°-20°	1083.7	29.8
20°-30°	1205.5	33.2
30°-40°	753.1	20.7
40°-50°	178.9	4.9
50°-60°	25.6	0.7
60°-70°	5.2	0.1
70°-80°	2.2	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2667.0	73.4
0°-40°	3420.1	94.2
0°-60°	3624.6	99.8
0°-90°	3632.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3632.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3957	
5°	3950	378
15°	3921	1084
25°	2643	1205
35°	1240	753
45°	193	179
55°	19	26
65°	5	5
75°	2	2
85°	0	0
90°	0	



TEST NUMBER: P582490

CATALOG NUMBER: HC640D010-HM63040927-61NDC

CANDELA DISTRIBUTION (FULL):

	0°
0°	3956.9
2.5°	3940.1
5°	3949.6
7.5°	3964.0
10°	3968.7
12.5°	3966.4
15°	3921.0
17.5°	3768.4
20°	3486.9
22.5°	3091.1
25°	2642.6
27.5°	2213.3
30°	1848.4
32.5°	1545.5
35°	1240.3
37.5°	911.0
40°	548.6
42.5°	317.2
45°	193.2
47.5°	124.0
50°	78.7
52.5°	45.4
55°	19.1
57.5°	9.5
60°	7.1
62.5°	7.1
65°	4.7
67.5°	4.7
70°	2.4
72.5°	2.4
75°	2.4
77.5°	2.4
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)