

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P582515

Luminaire Tested: **HC640D010-HM63040930-61WDC**

Issue Date: 9/16/2021

Test Information

Test Method: LM-41-14
Report Number: P582515
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2105-241-7)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 9/16/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC640D010-HM63040930-61WDC
Description: HALO COMMERCIAL 6" ROUND, NEW CONSTRUCTION FRAME, WITH 6" WIDE DISTRIBUTION, SPECULAR TRIM
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 4594.8 lumens
Efficiency: N/A
Efficacy: 112.1 lumens/watt
Spacing Criteria (0/90/45): 1.28 / 1.28 / 1.09
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 41
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P582515
CATALOG NUMBER: HC640D010-HM63040930-61WDC

Luminous Intensity Polar Plot

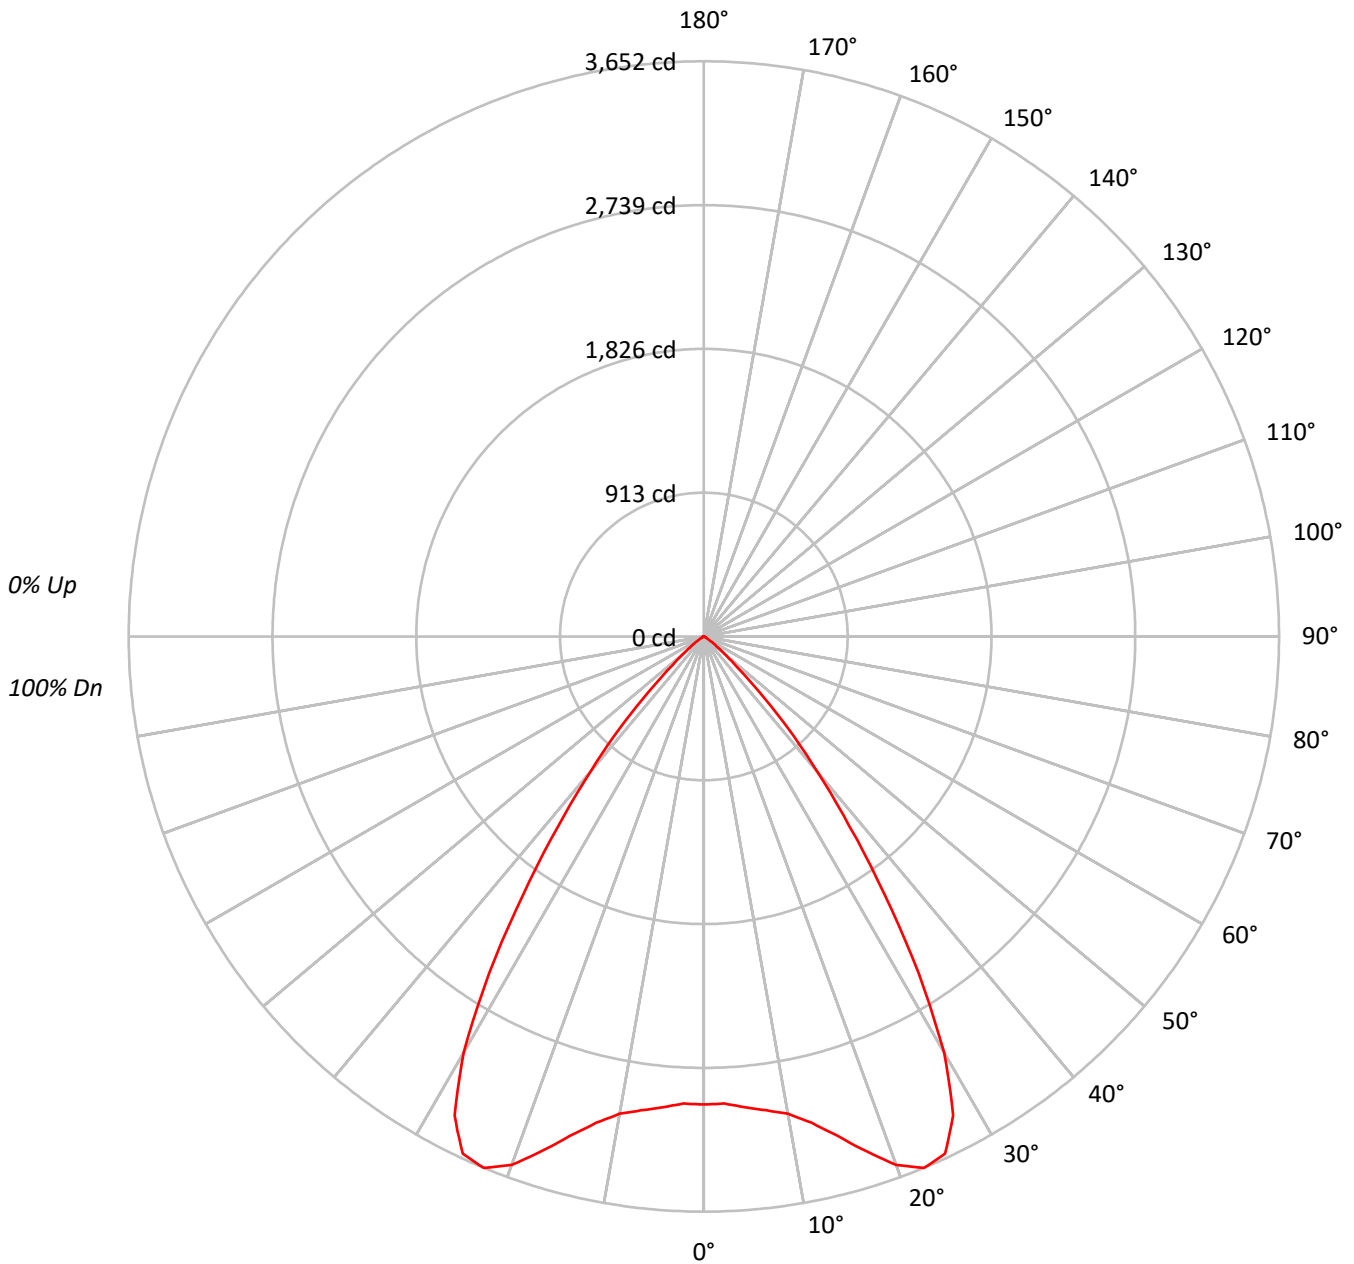



TEST NUMBER: P582515

CATALOG NUMBER: HC640D010-HM63040930-61WDC

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	113	110	108	105	111	108	106	103	104	102	100	100	99	97	97	96	94	93			93
2	107	102	97	94	105	100	96	93	97	94	91	94	91	89	91	89	87	85			85
3	101	94	89	85	99	93	88	84	90	86	82	88	84	81	85	82	80	78			78
4	95	87	81	77	93	86	80	76	84	79	75	82	78	74	80	76	74	72			72
5	90	81	75	70	88	80	74	70	78	73	69	76	72	68	75	71	68	66			66
6	85	75	69	64	83	74	68	64	73	67	63	71	67	63	70	66	62	61			61
7	80	70	63	59	79	69	63	59	68	62	58	67	62	58	66	61	58	56			56
8	76	65	59	54	74	65	59	54	64	58	54	62	57	54	61	57	53	52			52
9	71	61	55	50	70	60	54	50	60	54	50	59	53	50	58	53	50	48			48
10	68	57	51	47	67	57	51	47	56	50	46	55	50	46	54	50	46	45			45

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	162893
5°	165083
10°	171273
15°	186261
20°	208251
25°	219194
30°	192960
35°	133846
40°	79921
45°	37988
50°	14328
55°	5993
60°	1875
65°	1466
70°	914
75°	614
80°	916
85°	0



TEST NUMBER: P582515

CATALOG NUMBER: HC640D010-HM63040930-61WDC

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	288.7	6.3
10°-20°	942.4	20.5
20°-30°	1614.8	35.1
30°-40°	1254.1	27.3
40°-50°	414.6	9.0
50°-60°	63.6	1.4
60°-70°	11.2	0.2
70°-80°	4.2	0.1
80°-90°	1.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2845.9	61.9
0°-40°	4100.0	89.2
0°-60°	4578.3	99.6
0°-90°	4594.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4594.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2971	
5°	3000	289
15°	3282	942
25°	3624	1615
35°	2000	1254
45°	490	415
55°	63	64
65°	11	11
75°	3	4
85°	0	1
90°	0	



TEST NUMBER: P582515

CATALOG NUMBER: HC640D010-HM63040930-61WDC

CANDELA DISTRIBUTION (FULL):

	0°
0°	2971.4
2.5°	2968.5
5°	2999.9
7.5°	3034.1
10°	3076.8
12.5°	3162.3
15°	3281.9
17.5°	3427.3
20°	3569.7
22.5°	3652.3
25°	3623.8
27.5°	3427.3
30°	3048.3
32.5°	2538.4
35°	2000.0
37.5°	1518.4
40°	1116.8
42.5°	789.2
45°	490.0
47.5°	273.6
50°	168.0
52.5°	102.6
55°	62.7
57.5°	31.4
60°	17.1
62.5°	14.2
65°	11.3
67.5°	8.6
70°	5.7
72.5°	5.7
75°	2.9
77.5°	2.9
80°	2.9
82.5°	2.9
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)