

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P582558

Luminaire Tested: **HC6R40D010-HM63040940-62RMDC**

Issue Date: 9/16/2021

**Test Information**

Test Method: LM-41-14  
Report Number: P582558  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2105-241-13)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 9/16/2021  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: HALO COMMERCIAL  
Catalog Number: HC6R40D010-HM63040940-62RMDC  
Description: HALO COMMERCIAL 6" ROUND, RETROFIT FRAME, WITH 6" MEDIUM DISTRIBUTION, SPECULAR TRIM  
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4540.7 lumens  
Efficiency: N/A  
Efficacy: 110.7 lumens/watt  
Spacing Criteria (0/90/45): 1.08 / 1.08 / 0.96  
Luminous Opening: Circular (Dia: 0.5' x H: 0')  
CIE Type: Direct


Input Watts (W): 41  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P582558

CATALOG NUMBER: HC6R40D010-HM63040940-62RMDC

### Luminous Intensity Polar Plot

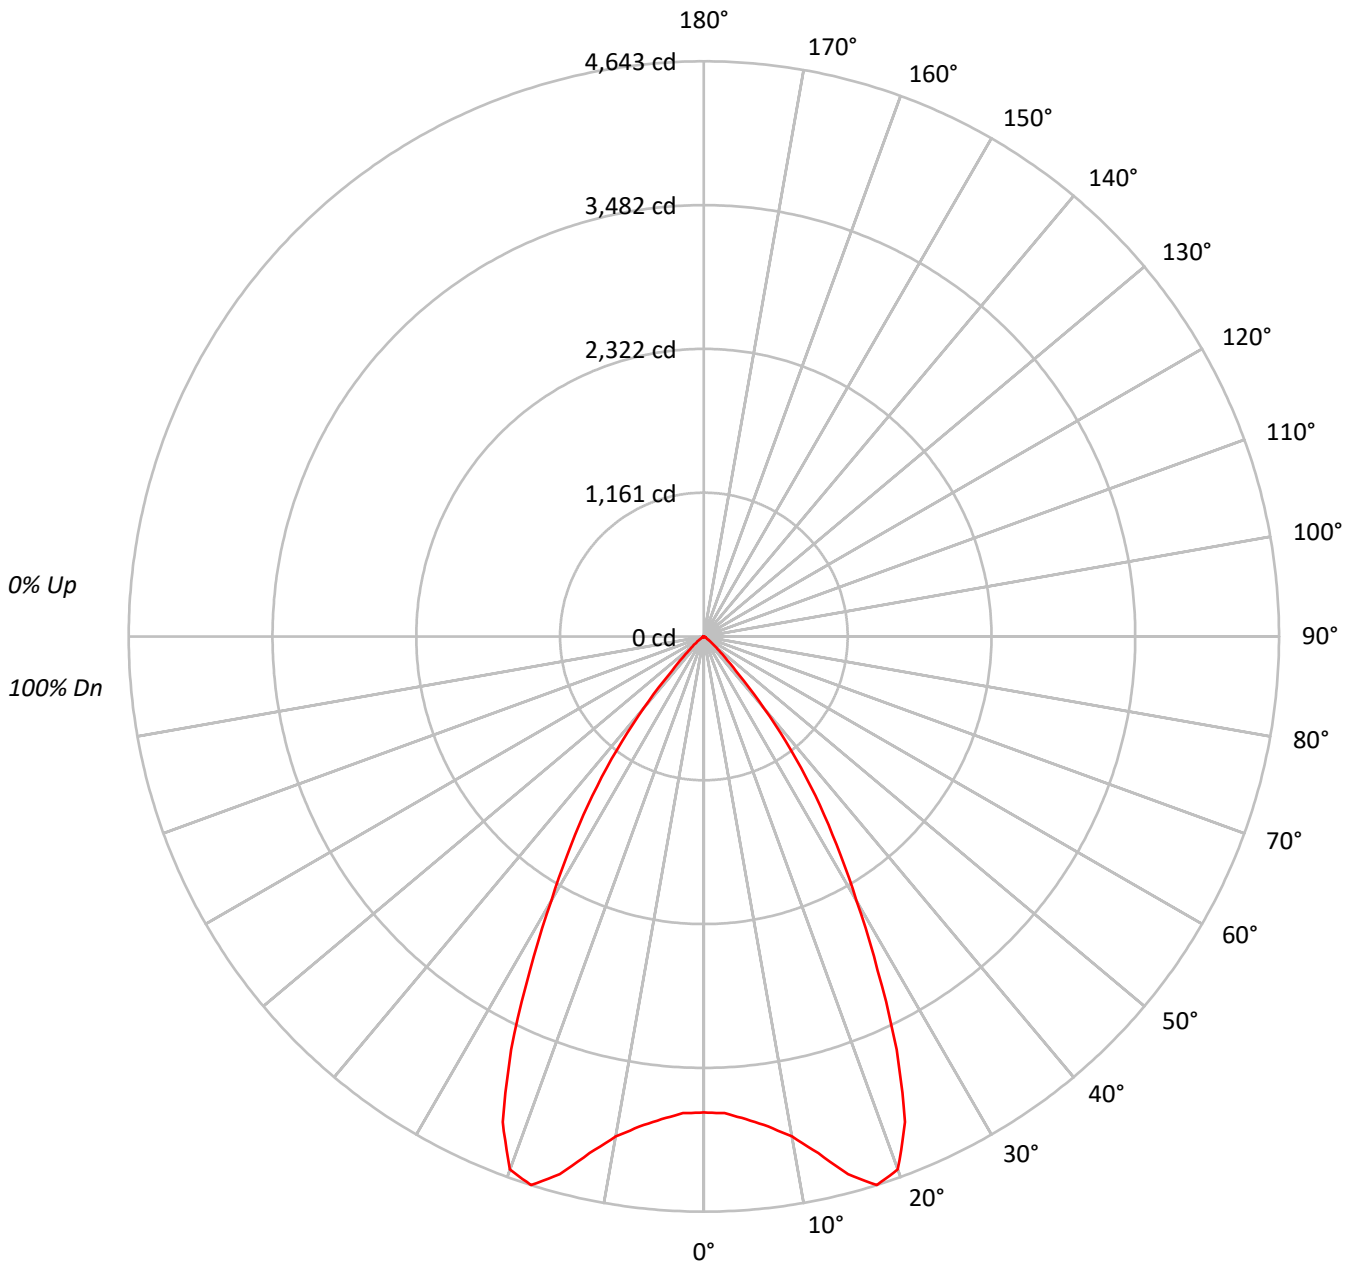



TEST NUMBER: P582558

CATALOG NUMBER: HC6R40D010-HM63040940-62RMDC

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	114	111	108	106	111	109	106	104	105	103	101	101	99	98	97	96	95	94			
2	108	103	99	96	106	101	98	95	98	95	92	95	93	91	92	90	89	87			
3	102	96	91	87	100	95	90	86	92	88	85	90	86	84	87	85	82	81			
4	97	90	84	80	95	89	83	79	86	82	79	84	81	78	83	79	77	75			
5	92	84	78	74	91	83	77	73	81	76	73	79	75	72	78	74	71	70			
6	88	79	73	68	86	78	72	68	76	71	68	75	71	67	74	70	67	65			
7	83	74	68	64	82	73	67	63	72	67	63	71	66	63	70	65	62	61			
8	79	69	63	59	78	69	63	59	68	63	59	67	62	59	66	62	58	57			
9	75	65	59	55	74	65	59	55	64	59	55	63	58	55	62	58	55	53			
10	72	62	56	52	71	61	56	52	60	55	52	60	55	52	59	55	51	50			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	210614
5°	215221
10°	228141
15°	255007
20°	267003
25°	222618
30°	155809
35°	104929
40°	54037
45°	18762
50°	8358
55°	2762
60°	1261
65°	1129
70°	930
75°	614
80°	916
85°	0



TEST NUMBER: P582558

CATALOG NUMBER: HC6R40D010-HM63040940-62RMDC

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	379.1	8.3
10°-20°	1266.0	27.9
20°-30°	1645.3	36.2
30°-40°	971.9	21.4
40°-50°	231.8	5.1
50°-60°	34.2	0.8
60°-70°	8.5	0.2
70°-80°	3.4	0.1
80°-90°	0.4	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3290.4	72.5
0°-40°	4262.3	93.9
0°-60°	4528.3	99.7
0°-90°	4540.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4540.7	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	3842	
5°	3911	379
15°	4493	1266
25°	3680	1645
35°	1568	972
45°	242	232
55°	29	34
65°	9	9
75°	3	3
85°	0	0
90°	0	



TEST NUMBER: P582558

CATALOG NUMBER: HC6R40D010-HM63040940-62RMDC

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	3841.9
2.5°	3850.6
5°	3911.0
7.5°	3988.8
10°	4098.4
12.5°	4271.3
15°	4493.2
17.5°	4643.1
20°	4576.8
22.5°	4242.4
25°	3680.4
27.5°	3037.8
30°	2461.4
32.5°	1991.6
35°	1567.9
37.5°	1152.8
40°	755.1
42.5°	412.2
45°	242.0
47.5°	149.8
50°	98.0
52.5°	57.6
55°	28.9
57.5°	14.4
60°	11.5
62.5°	11.5
65°	8.7
67.5°	5.8
70°	5.8
72.5°	2.9
75°	2.9
77.5°	2.9
80°	2.9
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P







— 0°-180°







(END OF REPORT)