

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P582586

Luminaire Tested: **HC645D010-HM64560830-61WDBB**

Issue Date: 9/16/2021

**Test Information**

Test Method: LM-41-14  
Report Number: P582586  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2105-241-11)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 9/16/2021  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: HALO COMMERCIAL  
Catalog Number: HC645D010-HM64560830-61WDBB  
Description: HALO COMMERCIAL 6" ROUND, NEW CONSTRUCTION FRAME, WITH 6" WIDE DISTRIBUTION, BLACK BAFFLE TRIM  
Light Source: (1) HIGH LUMEN LED 80CRI / 3000K CCT  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4349.4 lumens  
Efficiency: N/A  
Efficacy: 98.9 lumens/watt  
Spacing Criteria (0/90/45): 1.32 / 1.32 / 1.14  
Luminous Opening: Circular (Dia: 0.5' x H: 0')  
CIE Type: Direct


Input Watts (W): 44  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P582586

CATALOG NUMBER: HC645D010-HM64560830-61WDBB

### Luminous Intensity Polar Plot

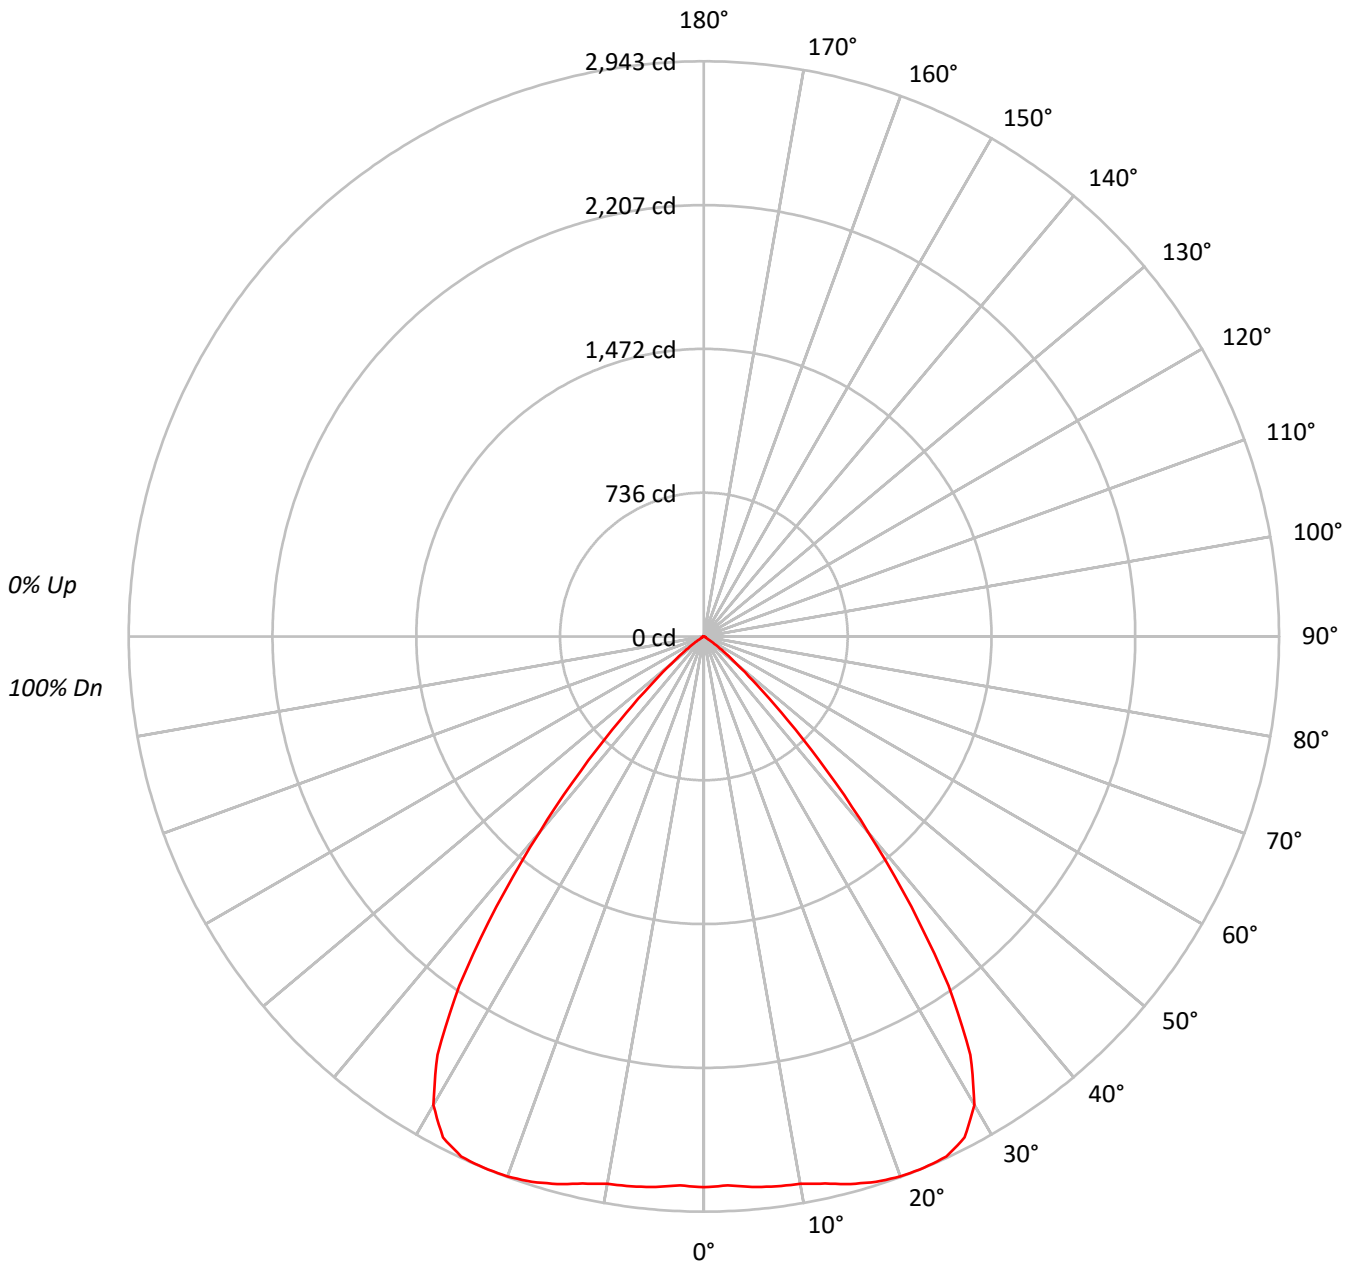



TEST NUMBER: P582586

CATALOG NUMBER: HC645D010-HM64560830-61WDBB

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	107	105	110	108	105	103	104	102	100	100	98	97	97	95	94	92	92	92	92
2	107	101	97	93	104	100	95	92	96	93	90	93	91	88	90	88	86	85	85	85	85
3	100	93	88	83	98	92	87	83	89	85	81	87	83	80	84	81	79	77	77	77	77
4	95	86	80	75	93	85	79	75	83	78	74	81	77	73	79	75	72	71	71	71	71
5	89	80	73	68	87	79	73	68	77	72	67	75	70	67	73	69	66	65	65	65	65
6	84	74	67	62	82	73	67	62	71	66	62	70	65	61	69	64	61	59	59	59	59
7	79	68	62	57	77	68	61	57	66	61	57	65	60	56	64	59	56	54	54	54	54
8	74	64	57	52	73	63	57	52	62	56	52	61	56	52	60	55	52	50	50	50	50
9	70	59	53	48	69	59	53	48	58	52	48	57	52	48	56	51	48	46	46	46	46
10	66	56	49	45	65	55	49	45	54	48	45	53	48	44	53	48	44	43	43	43	43

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	154467
5°	155602
10°	158319
15°	164592
20°	171497
25°	177615
30°	175236
35°	146006
40°	93633
45°	46749
50°	18549
55°	6298
60°	1798
65°	1284
70°	1058
75°	1398
80°	1042
85°	0



TEST NUMBER: P582586

CATALOG NUMBER: HC645D010-HM64560830-61WDBB

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	270.4	6.2
10°-20°	822.5	18.9
20°-30°	1343.1	30.9
30°-40°	1316.6	30.3
40°-50°	504.8	11.6
50°-60°	74.1	1.7
60°-70°	11.0	0.3
70°-80°	5.7	0.1
80°-90°	1.3	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2436.0	56.0
0°-40°	3752.6	86.3
0°-60°	4331.5	99.6
0°-90°	4349.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4349.4	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2818	
5°	2828	270
15°	2900	823
25°	2936	1343
35°	2182	1317
45°	603	505
55°	66	74
65°	10	11
75°	7	6
85°	0	1
90°	0	



TEST NUMBER: P582586

CATALOG NUMBER: HC645D010-HM64560830-61WDBB

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	2817.7
2.5°	2811.1
5°	2827.6
7.5°	2837.5
10°	2844.1
12.5°	2867.2
15°	2900.1
17.5°	2926.4
20°	2939.7
22.5°	2942.9
25°	2936.4
27.5°	2890.2
30°	2768.3
32.5°	2537.6
35°	2181.7
37.5°	1743.3
40°	1308.4
42.5°	932.7
45°	603.0
47.5°	369.1
50°	217.5
52.5°	125.3
55°	65.9
57.5°	29.7
60°	16.4
62.5°	13.1
65°	9.9
67.5°	9.9
70°	6.6
72.5°	6.6
75°	6.6
77.5°	3.3
80°	3.3
82.5°	3.3
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P







— 0°-180°







(END OF REPORT)