

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P582579

Luminaire Tested: **HC645D010-HM64560830-61MDW**

Issue Date: 9/16/2021

Test Information

Test Method: LM-41-14
Report Number: P582579
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2105-241-6)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 9/16/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC645D010-HM64560830-61MDW
Description: HALO COMMERCIAL 6" ROUND, NEW CONSTRUCTION FRAME, WITH 6" MEDIUM DISTRIBUTION, WHITE TRIM
Light Source: (1) HIGH LUMEN LED 80CRI / 3000K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4550.4 lumens
Efficiency: N/A
Efficacy: 103.4 lumens/watt
Spacing Criteria (0/90/45): 1.08 / 1.08 / 1.03
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct


Input Watts (W): 44
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P582579

CATALOG NUMBER: HC645D010-HM64560830-61MDW

Luminous Intensity Polar Plot

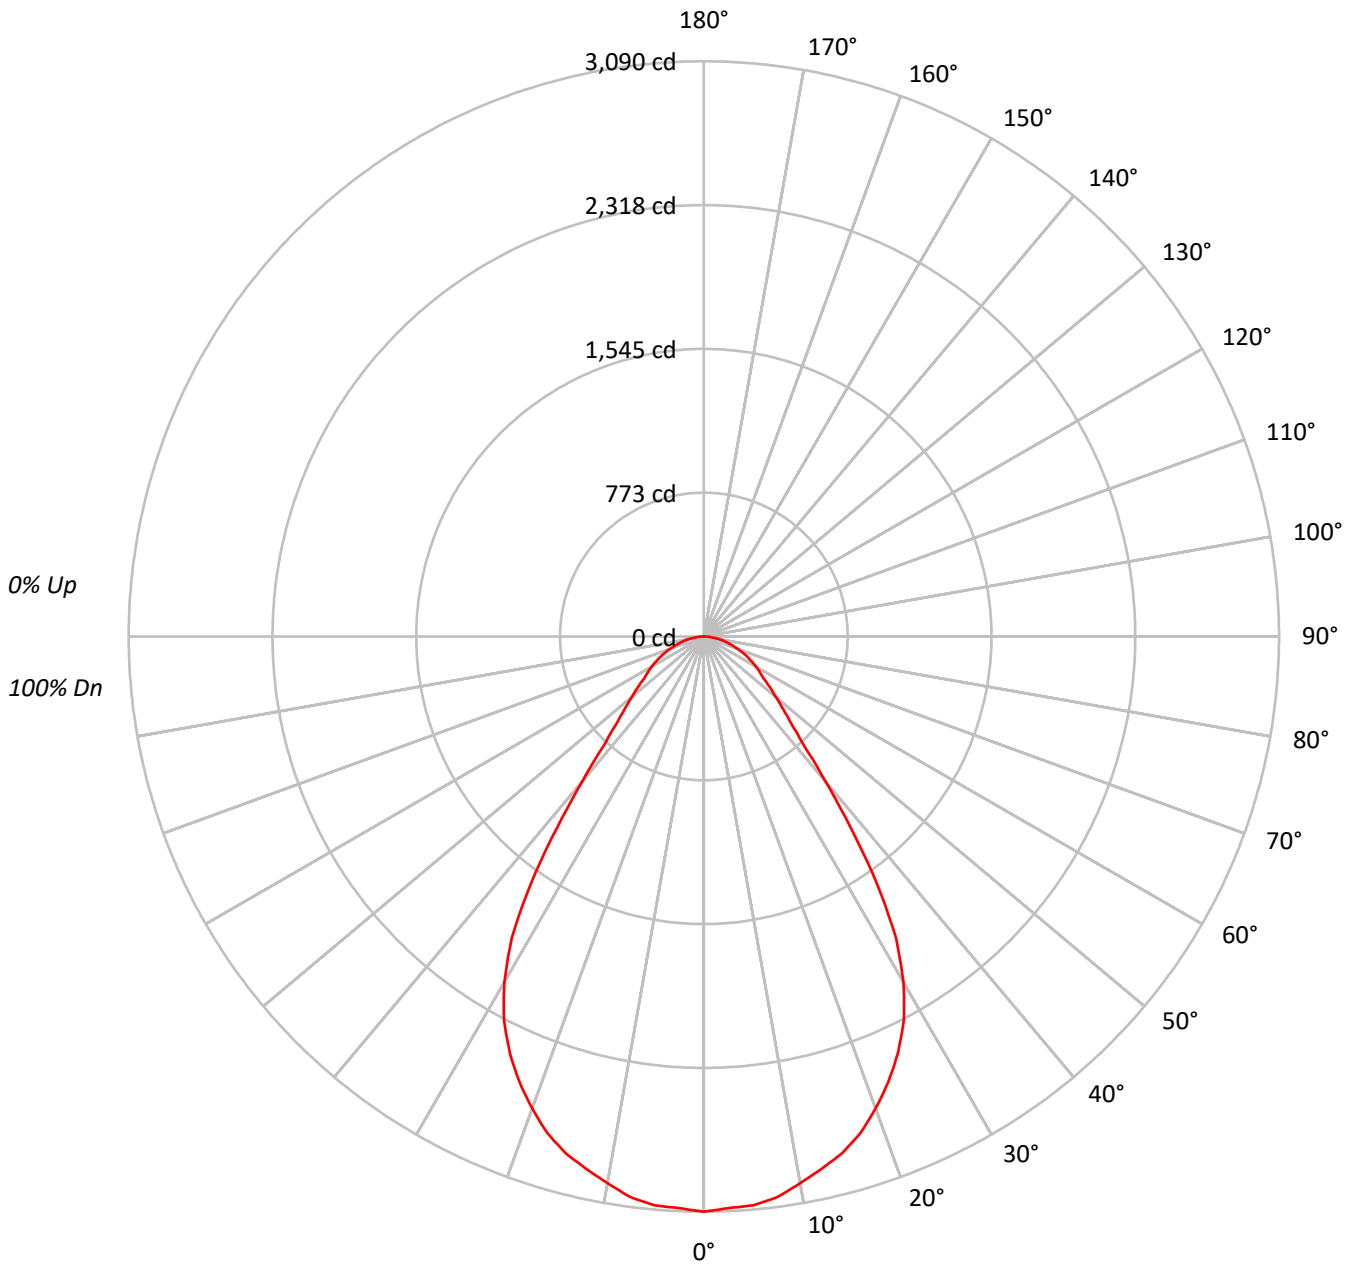



TEST NUMBER: P582579

CATALOG NUMBER: HC645D010-HM64560830-61MDW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	111	108	104	101	109	105	102	100	101	99	96	97	95	94	94	92	91	89			89
2	104	97	92	87	101	95	90	86	92	88	84	89	85	82	86	83	81	79			79
3	97	88	82	76	94	87	81	76	84	79	75	81	77	73	79	75	72	70			70
4	90	80	73	68	88	79	73	67	77	71	67	75	70	66	73	68	65	63			63
5	84	74	66	61	82	73	66	61	71	65	60	69	64	59	67	63	59	57			57
6	79	68	61	55	77	67	60	55	65	59	55	64	58	54	62	58	54	52			52
7	74	63	55	50	73	62	55	50	61	54	50	59	54	50	58	53	49	48			48
8	70	58	51	46	69	58	51	46	57	50	46	55	50	46	54	49	45	44			44
9	66	54	47	43	65	54	47	42	53	47	42	52	46	42	51	46	42	40			40
10	62	51	44	39	61	50	44	39	49	43	39	49	43	39	48	43	39	37			37

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	169394
5°	168770
10°	165957
15°	163032
20°	157397
25°	149247
30°	135749
35°	108462
40°	72378
45°	51587
50°	42984
55°	37466
60°	35392
65°	33337
70°	30630
75°	28594
80°	25982
85°	22769



TEST NUMBER: P582579

CATALOG NUMBER: HC645D010-HM64560830-61MDW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	290.1	6.4
10°-20°	806.6	17.7
20°-30°	1127.1	24.8
30°-40°	992.8	21.8
40°-50°	536.4	11.8
50°-60°	358.6	7.9
60°-70°	254.2	5.6
70°-80°	142.9	3.1
80°-90°	41.7	0.9
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2223.7	48.9
0°-40°	3216.6	70.7
0°-60°	4111.6	90.4
0°-90°	4550.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4550.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3090	
5°	3067	290
15°	2873	807
25°	2467	1127
35°	1621	993
45°	665	536
55°	392	359
65°	257	254
75°	135	143
85°	36	42
90°	0	



TEST NUMBER: P582579

CATALOG NUMBER: HC645D010-HM64560830-61MDW

CANDELA DISTRIBUTION (FULL):

	0°
0°	3090.0
2.5°	3073.5
5°	3066.9
7.5°	3037.2
10°	2981.3
12.5°	2928.5
15°	2872.6
17.5°	2796.8
20°	2698.0
22.5°	2589.3
25°	2467.4
27.5°	2325.7
30°	2144.5
32.5°	1920.6
35°	1620.7
37.5°	1294.6
40°	1011.4
42.5°	797.2
45°	665.4
47.5°	576.5
50°	504.0
52.5°	444.7
55°	392.0
57.5°	355.8
60°	322.8
62.5°	289.8
65°	257.0
67.5°	224.0
70°	191.1
72.5°	161.4
75°	135.0
77.5°	108.7
80°	82.3
82.5°	59.4
85°	36.2
87.5°	16.4
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)