

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P593307

Luminaire Tested: **HC645D010-HM64560850-61NDH**

Issue Date: 9/16/2021

Test Information

Test Method: LM-41-14
Report Number: P593307
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2105-241-2)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 9/16/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC645D010-HM64560850-61NDH
Description: HALO COMMERCIAL 6" ROUND, NEW CONSTRUCTION FRAME, WITH 6" NARROW DISTRIBUTION, HAZE TRIM
Light Source: (1) HIGH LUMEN LED 80CRI / 5000K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5205.9 lumens
Efficiency: N/A
Efficacy: 118.3 lumens/watt
Spacing Criteria (0/90/45): 0.89 / 0.89 / 0.89
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct


Input Watts (W): 44
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P593307

CATALOG NUMBER: HC645D010-HM64560850-61NDH

Luminous Intensity Polar Plot

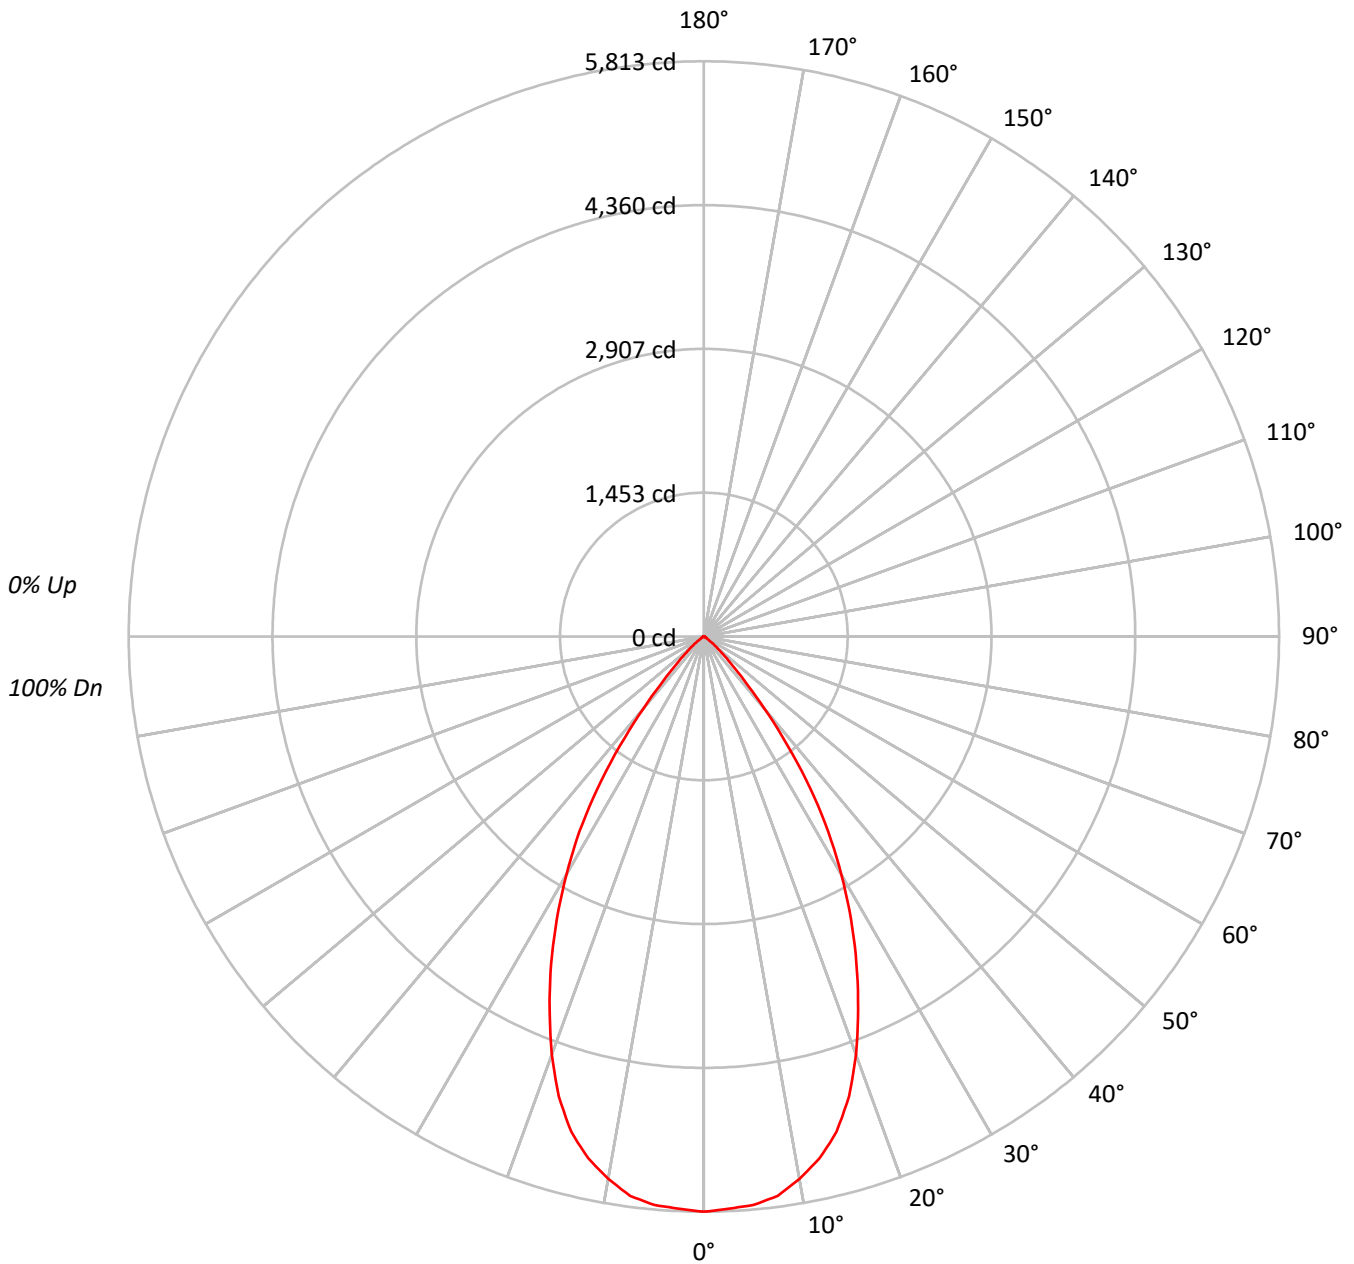



TEST NUMBER: P593307

CATALOG NUMBER: HC645D010-HM64560850-61NDH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	111	108	106	111	109	106	104	105	103	101	101	99	98	97	96	95	93			
2	108	103	99	96	106	101	98	94	98	95	92	95	93	90	92	90	89	87			
3	102	96	91	87	100	95	90	86	92	88	85	90	86	84	87	85	82	81			
4	97	90	84	80	95	88	83	79	86	82	78	84	81	78	82	79	77	75			
5	92	84	78	74	91	83	77	73	81	76	73	79	75	72	78	74	71	70			
6	88	79	73	68	86	78	72	68	76	71	68	75	71	67	74	70	67	65			
7	83	74	68	64	82	73	67	63	72	67	63	71	66	63	70	66	62	61			
8	79	70	64	59	78	69	63	59	68	63	59	67	62	59	66	62	59	57			
9	75	66	60	56	74	65	59	56	64	59	55	63	59	55	62	58	55	54			
10	72	62	56	52	71	62	56	52	61	56	52	60	55	52	59	55	52	51			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	318681
5°	317334
10°	309825
15°	294099
20°	262138
25°	220821
30°	175932
35°	125514
40°	67498
45°	28918
50°	13151
55°	4798
60°	2357
65°	1855
70°	1731
75°	763
80°	1137
85°	0



TEST NUMBER: P593307

CATALOG NUMBER: HC645D010-HM64560850-61NDH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	544.4	10.5
10°-20°	1436.4	27.6
20°-30°	1663.7	32.0
30°-40°	1150.4	22.1
40°-50°	332.2	6.4
50°-60°	57.2	1.1
60°-70°	14.6	0.3
70°-80°	5.7	0.1
80°-90°	1.5	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3644.4	70.0
0°-40°	4794.8	92.1
0°-60°	5184.2	99.6
0°-90°	5205.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5205.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	5813	
5°	5767	544
15°	5182	1436
25°	3651	1664
35°	1876	1150
45°	373	332
55°	50	57
65°	14	15
75°	4	6
85°	0	1
90°	0	



TEST NUMBER: P593307

CATALOG NUMBER: HC645D010-HM64560850-61NDH

CANDELA DISTRIBUTION (FULL):

	0°
0°	5813.2
2.5°	5788.1
5°	5766.6
7.5°	5702.0
10°	5565.8
12.5°	5400.7
15°	5182.0
17.5°	4873.6
20°	4493.4
22.5°	4073.8
25°	3650.7
27.5°	3216.8
30°	2779.3
32.5°	2341.8
35°	1875.5
37.5°	1391.4
40°	943.2
42.5°	595.3
45°	373.0
47.5°	240.2
50°	154.2
52.5°	93.3
55°	50.2
57.5°	28.7
60°	21.5
62.5°	17.9
65°	14.3
67.5°	10.8
70°	10.8
72.5°	7.2
75°	3.6
77.5°	3.6
80°	3.6
82.5°	3.6
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)