

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P593309

Luminaire Tested: **HC6R45D010-HM64560850-62RMDC**

Issue Date: 9/16/2021

**Test Information**

Test Method: LM-41-14  
Report Number: P593309  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2105-241-13)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 9/16/2021  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: HALO COMMERCIAL  
Catalog Number: HC6R45D010-HM64560850-62RMDC  
Description: HALO COMMERCIAL 6" ROUND, RETROFIT FRAME, WITH 6" MEDIUM DISTRIBUTION, SPECULAR TRIM  
Light Source: (1) HIGH LUMEN LED 80CRI / 5000K CCT  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 5650.5 lumens  
Efficiency: N/A  
Efficacy: 128.4 lumens/watt  
Spacing Criteria (0/90/45): 1.08 / 1.08 / 0.96  
Luminous Opening: Circular (Dia: 0.5' x H: 0')  
CIE Type: Direct


Input Watts (W): 44  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P593309

CATALOG NUMBER: HC6R45D010-HM64560850-62RMDC

### Luminous Intensity Polar Plot

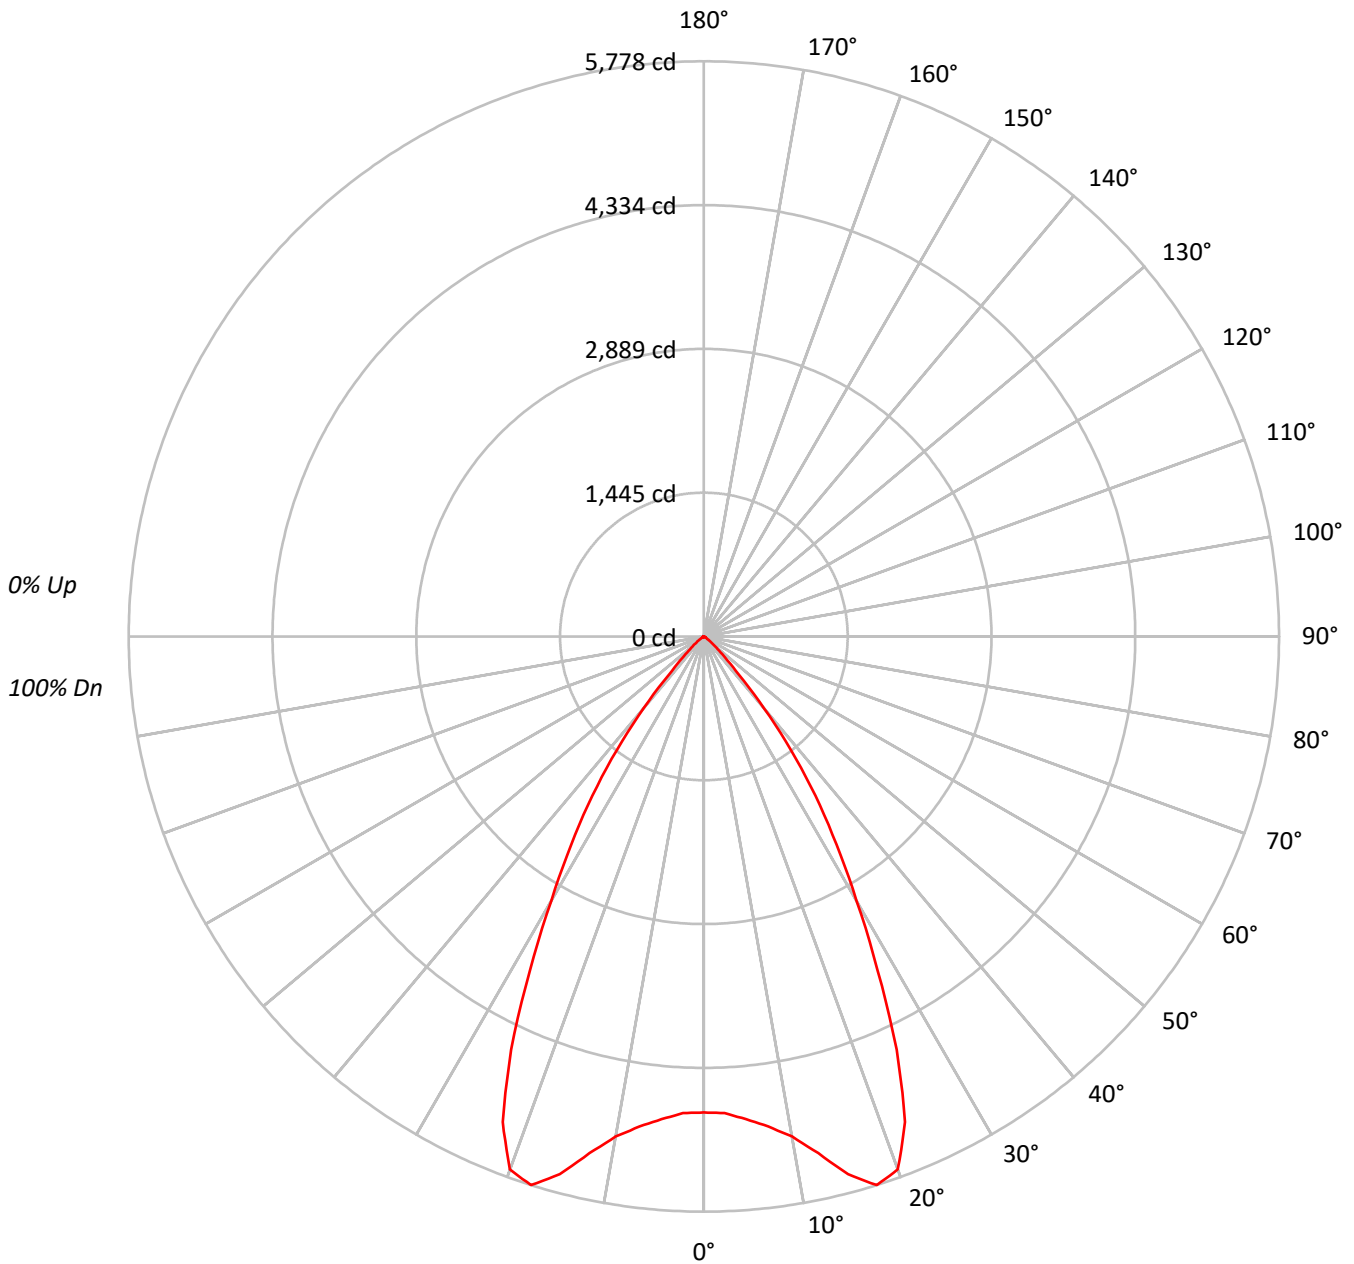



TEST NUMBER: P593309

CATALOG NUMBER: HC6R45D010-HM64560850-62RMDC

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	114	111	108	106	111	109	106	104	105	103	101	101	99	98	97	96	95	94			
2	108	103	99	96	106	101	98	95	98	95	92	95	93	91	92	90	89	87			
3	102	96	91	87	100	95	90	86	92	88	85	90	86	84	87	85	82	81			
4	97	90	84	80	95	89	83	79	86	82	79	84	81	78	83	79	77	75			
5	92	84	78	74	91	83	77	73	81	76	73	79	75	72	78	74	71	70			
6	88	79	73	68	86	78	72	68	76	71	68	75	71	67	74	70	67	65			
7	83	74	68	64	82	73	67	63	72	67	63	71	66	63	70	65	62	61			
8	79	69	63	59	78	69	63	59	68	63	59	67	62	59	66	62	58	57			
9	75	65	59	55	74	65	59	55	64	59	55	63	58	55	62	58	55	53			
10	72	62	56	52	71	61	56	52	60	55	52	60	55	52	59	55	51	50			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	262090
5°	267829
10°	283901
15°	317340
20°	332266
25°	277038
30°	193884
35°	130574
40°	67247
45°	23351
50°	10405
55°	3431
60°	1568
65°	1401
70°	1154
75°	763
80°	1137
85°	0



TEST NUMBER: P593309

CATALOG NUMBER: HC6R45D010-HM64560850-62RMDC

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	471.7	8.3
10°-20°	1575.4	27.9
20°-30°	2047.5	36.2
30°-40°	1209.4	21.4
40°-50°	288.5	5.1
50°-60°	42.5	0.8
60°-70°	10.6	0.2
70°-80°	4.3	0.1
80°-90°	0.5	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4094.6	72.5
0°-40°	5304.1	93.9
0°-60°	5635.1	99.7
0°-90°	5650.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5650.5	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	4781	
5°	4867	472
15°	5592	1575
25°	4580	2047
35°	1951	1209
45°	301	289
55°	36	43
65°	11	11
75°	4	4
85°	0	0
90°	0	



TEST NUMBER: P593309

CATALOG NUMBER: HC6R45D010-HM64560850-62RMDC

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	4780.9
2.5°	4791.7
5°	4867.0
7.5°	4963.8
10°	5100.1
12.5°	5315.3
15°	5591.5
17.5°	5778.0
20°	5695.5
22.5°	5279.4
25°	4580.1
27.5°	3780.2
30°	3062.9
32.5°	2478.3
35°	1951.1
37.5°	1434.6
40°	939.7
42.5°	512.8
45°	301.2
47.5°	186.5
50°	122.0
52.5°	71.8
55°	35.9
57.5°	17.9
60°	14.3
62.5°	14.3
65°	10.8
67.5°	7.2
70°	7.2
72.5°	3.6
75°	3.6
77.5°	3.6
80°	3.6
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P







— 0°-180°







(END OF REPORT)