

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P582655

Luminaire Tested: **HC645D010-HM64560930-61PSMDW**

Issue Date: 9/16/2021

**Test Information**

Test Method: LM-41-14  
Report Number: P582655  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2105-241-12)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 9/16/2021  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: HALO COMMERCIAL  
Catalog Number: HC645D010-HM64560930-61PSMDW  
Description: HALO COMMERCIAL 6" ROUND, NEW CONSTRUCTION FRAME, WITH 6" PLASTIC TRIM  
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4291.9 lumens  
Efficiency: N/A  
Efficacy: 97.5 lumens/watt  
Spacing Criteria (0/90/45): 1.09 / 1.09 / 1.04  
Luminous Opening: Circular (Dia: 0.5' x H: 0')  
CIE Type: Direct


Input Watts (W): 44  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P582655

CATALOG NUMBER: HC645D010-HM64560930-61PSMDW

### Luminous Intensity Polar Plot

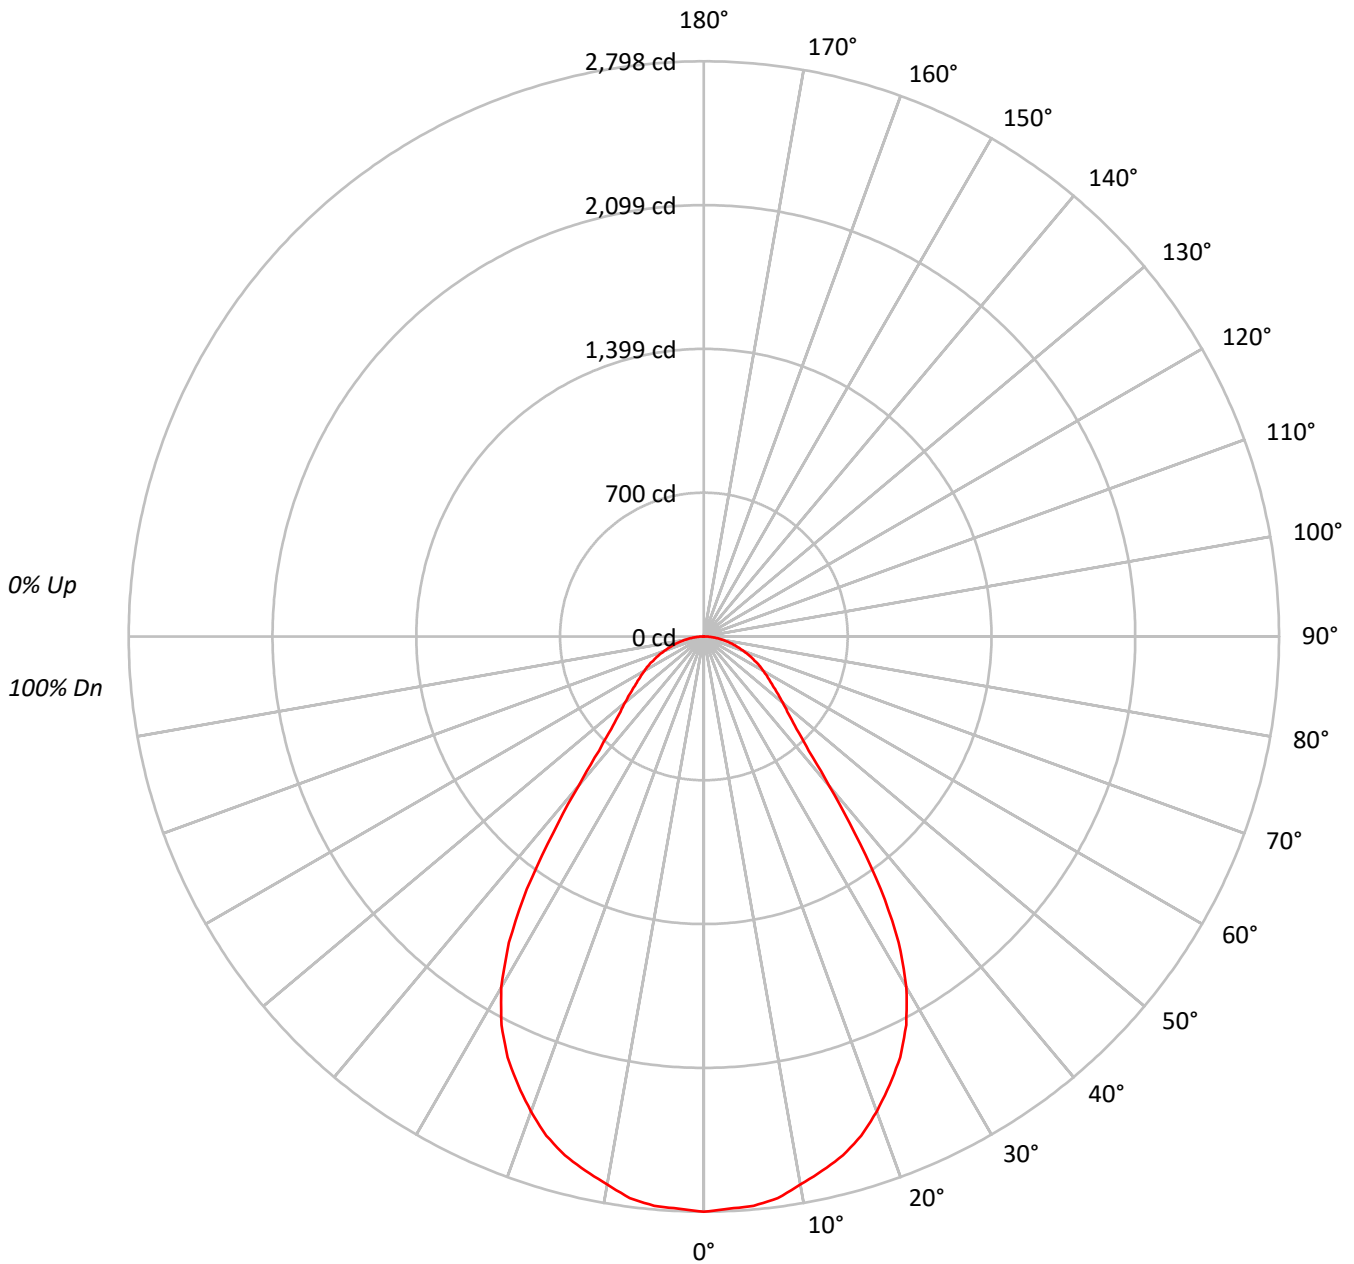



TEST NUMBER: P582655

CATALOG NUMBER: HC645D010-HM64560930-61PSMDW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	111	107	104	101	108	105	102	99	101	98	96	97	95	93	93	92	90	88			
2	103	96	91	86	101	95	90	85	91	87	83	88	85	82	85	82	80	78			
3	96	87	81	75	94	86	80	75	83	78	73	80	76	72	78	74	71	69			
4	89	80	72	67	87	78	72	66	76	70	65	74	69	65	72	67	64	62			
5	84	73	65	60	82	72	65	59	70	64	59	68	63	58	66	62	58	56			
6	78	67	59	54	77	66	59	54	64	58	53	63	57	53	61	56	53	51			
7	73	62	54	49	72	61	54	49	60	53	49	58	53	48	57	52	48	46			
8	69	57	50	45	68	57	50	45	56	49	45	54	49	44	53	48	44	43			
9	65	53	46	41	64	53	46	41	52	46	41	51	45	41	50	45	41	39			
10	62	50	43	38	60	49	43	38	49	42	38	48	42	38	47	42	38	36			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	153403
5°	152988
10°	150704
15°	148315
20°	143437
25°	136617
30°	124741
35°	100431
40°	67691
45°	49362
50°	42668
55°	38546
60°	36565
65°	34595
70°	32570
75°	30839
80°	28697
85°	26732



TEST NUMBER: P582655

CATALOG NUMBER: HC645D010-HM64560930-61PSMDW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	263.1	6.1
10°-20°	733.9	17.1
20°-30°	1031.1	24.0
30°-40°	917.8	21.4
40°-50°	512.9	12.0
50°-60°	365.4	8.5
60°-70°	265.9	6.2
70°-80°	153.9	3.6
80°-90°	47.8	1.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2028.1	47.3
0°-40°	2945.9	68.6
0°-60°	3824.3	89.1
0°-90°	4291.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4291.9	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2798	
5°	2780	263
15°	2613	734
25°	2259	1031
35°	1501	918
45°	637	513
55°	403	365
65°	267	266
75°	146	154
85°	42	48
90°	0	



TEST NUMBER: P582655

CATALOG NUMBER: HC645D010-HM64560930-61PSMDW

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	2798.3
2.5°	2786.1
5°	2780.1
7.5°	2755.8
10°	2707.3
12.5°	2661.9
15°	2613.3
17.5°	2546.7
20°	2458.7
22.5°	2361.7
25°	2258.6
27.5°	2131.3
30°	1970.6
32.5°	1764.4
35°	1500.7
37.5°	1203.6
40°	945.9
42.5°	754.9
45°	636.7
47.5°	557.9
50°	500.3
52.5°	448.7
55°	403.3
57.5°	366.8
60°	333.5
62.5°	303.2
65°	266.7
67.5°	236.5
70°	203.2
72.5°	172.8
75°	145.6
77.5°	118.2
80°	90.9
82.5°	66.7
85°	42.5
87.5°	21.2
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P







— 0°-180°







(END OF REPORT)