

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P582776

Luminaire Tested: **HC650D010-HM64560927-61MDH**

Issue Date: 9/16/2021

Test Information

Test Method: LM-41-14
Report Number: P582776
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2105-241-5)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 9/16/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC650D010-HM64560927-61MDH
Description: HALO COMMERCIAL 6" ROUND, NEW CONSTRUCTION FRAME, WITH 6" MEDIUM DISTRIBUTION, HAZE TRIM
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3804.6 lumens
Efficiency: N/A
Efficacy: 79.3 lumens/watt
Spacing Criteria (0/90/45): 1.01 / 1.01 / 0.97
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct


Input Watts (W): 48
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P582776

CATALOG NUMBER: HC650D010-HM64560927-61MDH

Luminous Intensity Polar Plot

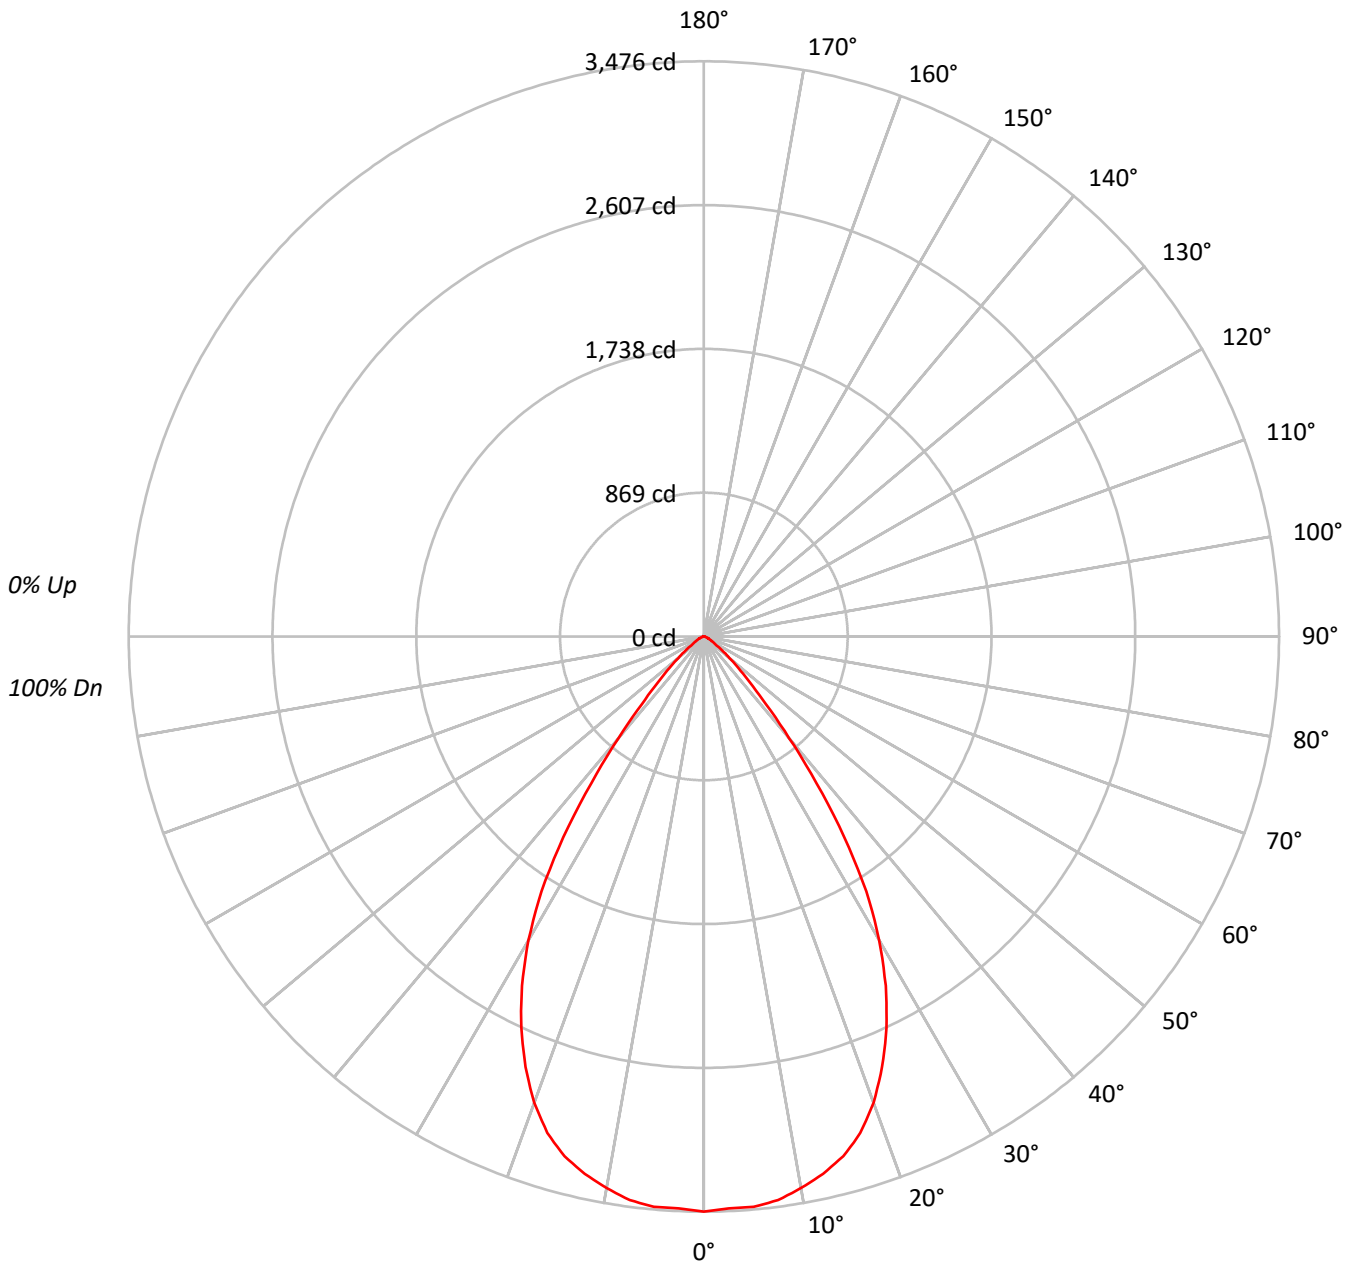



TEST NUMBER: P582776

CATALOG NUMBER: HC650D010-HM64560927-61MDH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	94	93	93	93	93
2	107	102	98	94	105	100	96	93	97	94	91	94	91	89	91	89	87	85	85	85	85
3	101	94	89	85	99	93	88	84	90	86	83	88	84	81	86	83	80	79	79	79	79
4	96	88	82	77	94	86	81	77	84	79	76	82	78	75	80	77	74	72	72	72	72
5	90	81	75	71	89	80	75	70	79	74	70	77	73	69	75	72	68	67	67	67	67
6	85	76	70	65	84	75	69	65	74	68	64	72	67	64	71	67	63	62	62	62	62
7	81	71	65	60	79	70	64	60	69	64	60	68	63	59	67	62	59	57	57	57	57
8	77	67	60	56	75	66	60	56	65	59	55	64	59	55	63	58	55	53	53	53	53
9	73	62	56	52	72	62	56	52	61	56	52	60	55	52	59	55	51	50	50	50	50
10	69	59	53	49	68	58	52	48	57	52	48	57	52	48	56	51	48	47	47	47	47

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	190549
5°	190386
10°	188407
15°	184615
20°	174881
25°	157933
30°	134160
35°	99046
40°	57286
45°	30406
50°	17185
55°	8984
60°	5888
65°	4177
70°	3013
75°	2266
80°	1673
85°	1698



TEST NUMBER: P582776

CATALOG NUMBER: HC650D010-HM64560927-61MDH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	327.9	8.6
10°-20°	909.8	23.9
20°-30°	1187.5	31.2
30°-40°	907.5	23.9
40°-50°	328.5	8.6
50°-60°	95.4	2.5
60°-70°	34.1	0.9
70°-80°	11.7	0.3
80°-90°	2.2	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2425.2	63.7
0°-40°	3332.7	87.6
0°-60°	3756.6	98.7
0°-90°	3804.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3804.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3476	
5°	3460	328
15°	3253	910
25°	2611	1188
35°	1480	907
45°	392	329
55°	94	95
65°	32	34
75°	11	12
85°	3	2
90°	0	



TEST NUMBER: P582776

CATALOG NUMBER: HC650D010-HM64560927-61MDH

CANDELA DISTRIBUTION (FULL):

	0°
0°	3475.9
2.5°	3459.7
5°	3459.7
7.5°	3435.6
10°	3384.6
12.5°	3325.5
15°	3252.9
17.5°	3145.5
20°	2997.7
22.5°	2815.1
25°	2611.0
27.5°	2380.0
30°	2119.4
32.5°	1826.7
35°	1480.0
37.5°	1117.5
40°	800.5
42.5°	553.3
45°	392.2
47.5°	282.0
50°	201.5
52.5°	142.3
55°	94.0
57.5°	67.2
60°	53.7
62.5°	43.0
65°	32.2
67.5°	26.8
70°	18.8
72.5°	13.5
75°	10.7
77.5°	8.0
80°	5.3
82.5°	2.7
85°	2.7
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)