

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P582900

Luminaire Tested: **HC6R05D010-HM60525835-62RMDC**

Issue Date: 9/16/2021

Test Information

Test Method: LM-41-14
Report Number: P582900
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2105-241-13)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 9/16/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC6R05D010-HM60525835-62RMDC
Description: HALO COMMERCIAL 6" ROUND, RETROFIT FRAME, WITH 6" MEDIUM DISTRIBUTION, SPECULAR TRIM
Light Source: (1) HIGH LUMEN LED 80CRI / 3500K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 764.5 lumens
Efficiency: N/A
Efficacy: 127.4 lumens/watt
Spacing Criteria (0/90/45): 1.08 / 1.08 / 0.96
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct


Input Watts (W): 6
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P582900

CATALOG NUMBER: HC6R05D010-HM60525835-62RMDC

Luminous Intensity Polar Plot

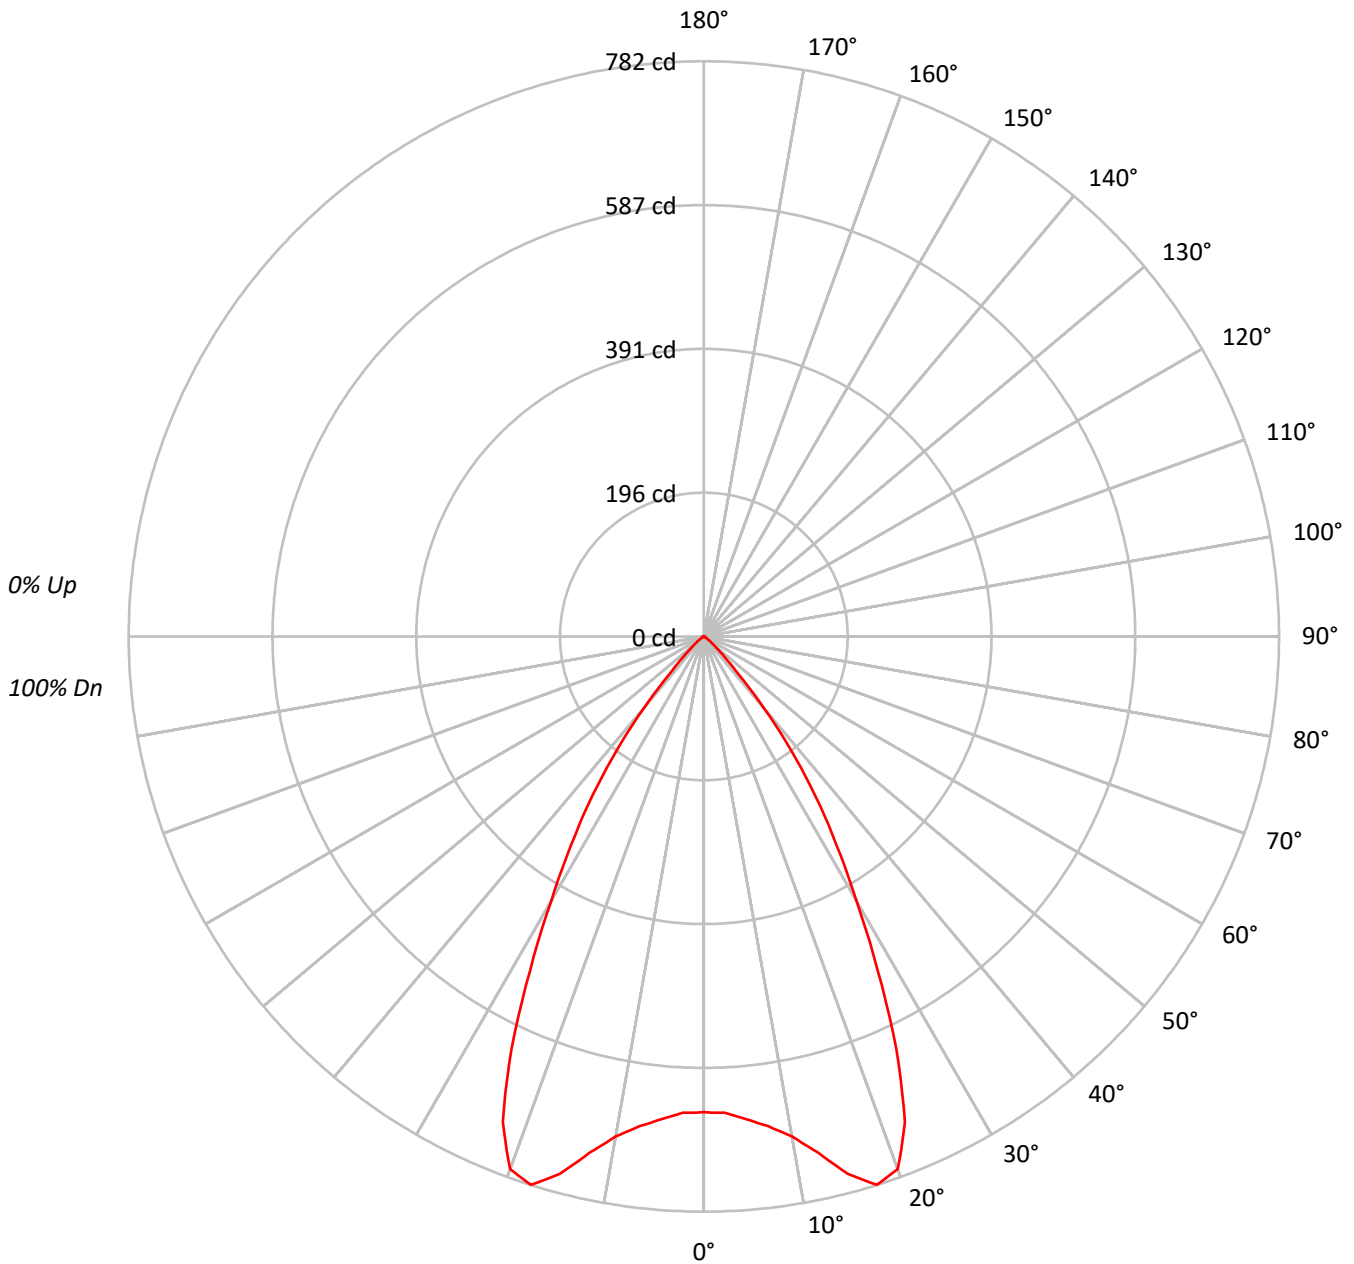



TEST NUMBER: P582900

CATALOG NUMBER: HC6R05D010-HM60525835-62RMDC

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	114	111	108	106	111	109	106	104	105	103	101	101	99	98	97	96	95	94			
2	108	103	99	96	106	101	98	95	98	95	92	95	93	91	92	90	89	87			
3	102	96	91	87	100	95	90	86	92	88	85	90	86	84	87	85	82	81			
4	97	90	84	80	95	89	83	79	86	82	79	84	81	78	83	79	77	75			
5	92	84	78	74	91	83	77	73	81	76	73	79	75	72	78	74	71	70			
6	88	79	73	68	86	78	72	68	76	71	68	75	71	67	74	70	67	65			
7	83	74	68	64	82	73	67	63	72	67	63	71	66	63	70	65	62	61			
8	79	69	63	59	78	69	63	59	68	63	59	67	62	59	66	62	58	57			
9	75	65	59	55	74	65	59	55	64	59	55	63	58	55	62	58	55	53			
10	72	62	56	52	71	61	56	52	60	55	52	60	55	52	59	55	51	50			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	35458
5°	36237
10°	38409
15°	42929
20°	44950
25°	37478
30°	26232
35°	17668
40°	9096
45°	3163
50°	1407
55°	468
60°	208
65°	195
70°	160
75°	106
80°	158
85°	0



TEST NUMBER: P582900

CATALOG NUMBER: HC6R05D010-HM60525835-62RMDC

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	63.8	8.3
10°-20°	213.1	27.9
20°-30°	277.0	36.2
30°-40°	163.6	21.4
40°-50°	39.0	5.1
50°-60°	5.8	0.8
60°-70°	1.4	0.2
70°-80°	0.6	0.1
80°-90°	0.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	554.0	72.5
0°-40°	717.6	93.9
0°-60°	762.4	99.7
0°-90°	764.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	764.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	647	
5°	658	64
15°	756	213
25°	620	277
35°	264	164
45°	41	39
55°	5	6
65°	2	1
75°	0	1
85°	0	0
90°	0	



TEST NUMBER: P582900

CATALOG NUMBER: HC6R05D010-HM60525835-62RMDC

CANDELA DISTRIBUTION (FULL):

0°	
0°	646.8
2.5°	648.3
5°	658.5
7.5°	671.6
10°	690.0
12.5°	719.1
15°	756.4
17.5°	781.7
20°	770.5
22.5°	714.3
25°	619.6
27.5°	511.4
30°	414.4
32.5°	335.3
35°	264.0
37.5°	194.1
40°	127.1
42.5°	69.4
45°	40.8
47.5°	25.2
50°	16.5
52.5°	9.7
55°	4.9
57.5°	2.4
60°	1.9
62.5°	1.9
65°	1.5
67.5°	1.0
70°	1.0
72.5°	0.5
75°	0.5
77.5°	0.5
80°	0.5
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)