

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P593000

Luminaire Tested: **HC605D010-HM60525950-61MDH**

Issue Date: 9/16/2021

Test Information

Test Method: LM-41-14
Report Number: P593000
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2105-241-5)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 9/16/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC605D010-HM60525950-61MDH
Description: HALO COMMERCIAL 6" ROUND, NEW CONSTRUCTION FRAME, WITH 6" MEDIUM DISTRIBUTION, HAZE TRIM
Light Source: (1) HIGH LUMEN LED 90CRI / 5000K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 618.2 lumens
Efficiency: N/A
Efficacy: 103.0 lumens/watt
Spacing Criteria (0/90/45): 1.01 / 1.01 / 0.97
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct


Input Watts (W): 6
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P593000

CATALOG NUMBER: HC605D010-HM60525950-61MDH

Luminous Intensity Polar Plot

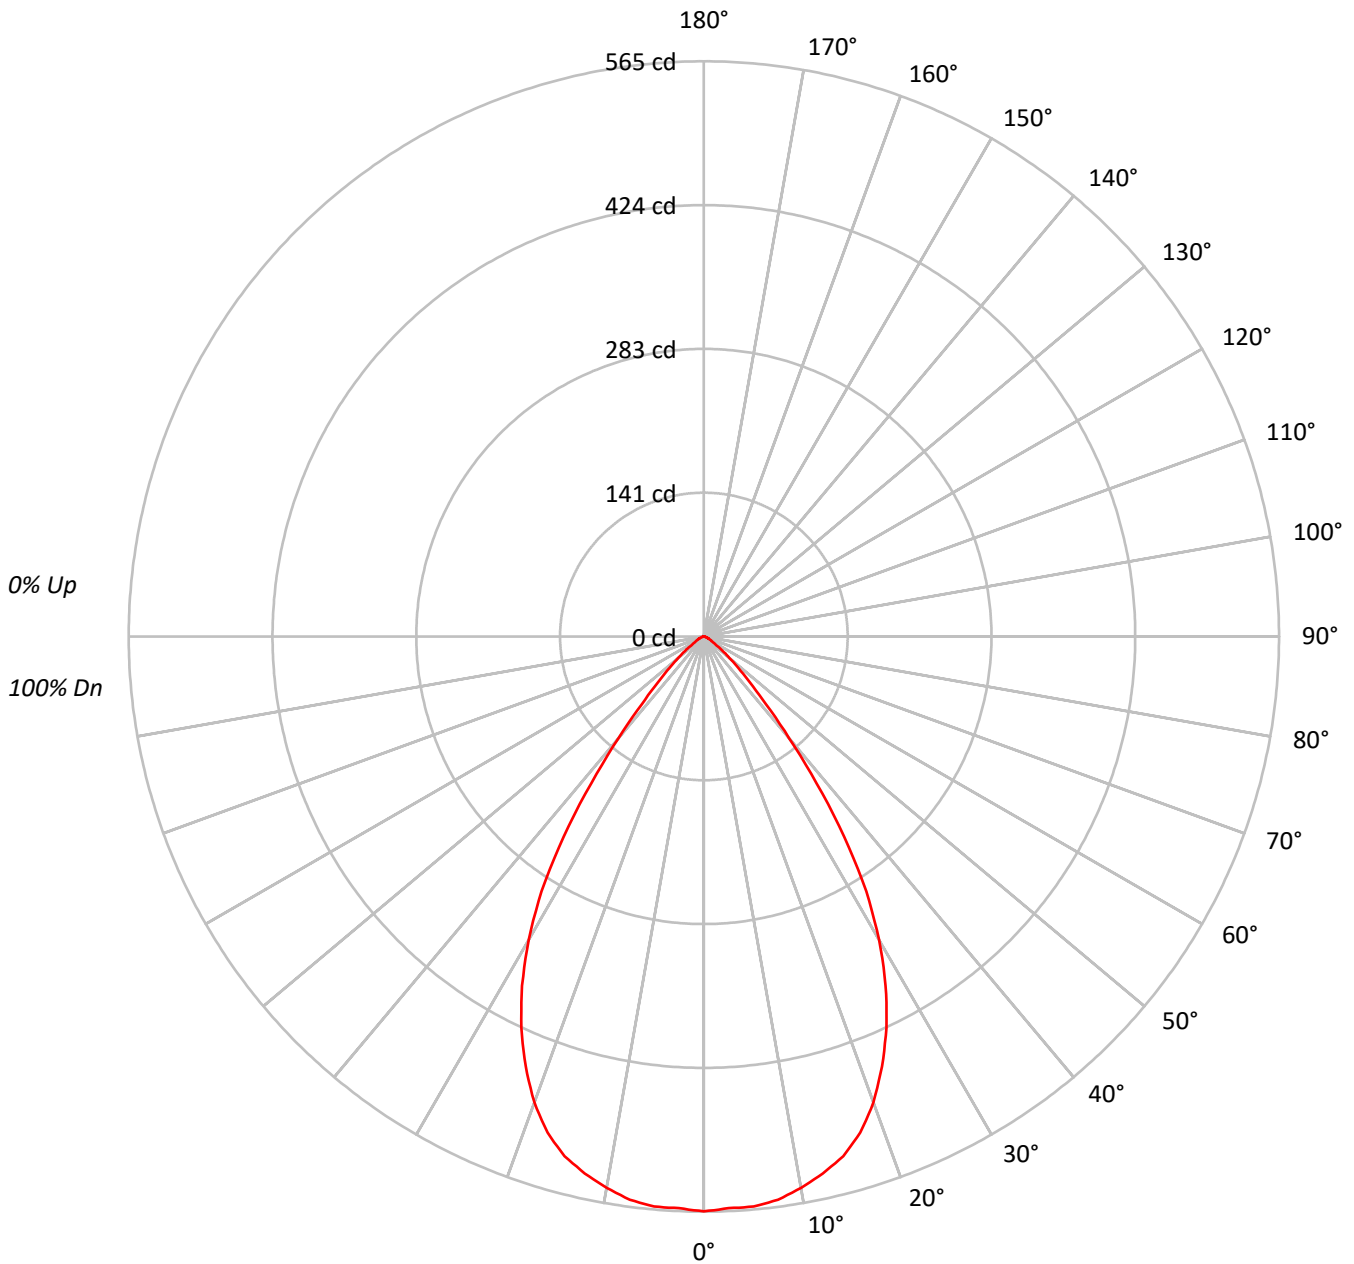



TEST NUMBER: P593000

CATALOG NUMBER: HC605D010-HM60525950-61MDH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	108	105	111	108	106	103	104	102	100	100	99	97	97	96	94	93	93	93	93
2	107	102	98	94	105	100	96	93	97	94	91	94	91	89	91	89	87	85	85	85	85
3	101	94	89	85	99	93	88	84	90	86	83	88	84	81	86	83	80	79	79	79	79
4	96	88	82	77	94	86	81	77	84	79	76	82	78	75	80	77	74	72	72	72	72
5	90	81	75	71	89	80	75	70	79	74	70	77	73	69	75	71	68	67	67	67	67
6	85	76	70	65	84	75	69	65	74	68	64	72	67	64	71	67	63	62	62	62	62
7	81	71	65	60	79	70	64	60	69	64	60	68	63	59	67	62	59	57	57	57	57
8	77	66	60	56	75	66	60	56	65	59	55	64	59	55	63	58	55	53	53	53	53
9	73	62	56	52	71	62	56	52	61	56	52	60	55	51	59	55	51	50	50	50	50
10	69	59	53	49	68	58	52	48	57	52	48	57	52	48	56	51	48	47	47	47	47

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	30957
5°	30932
10°	30611
15°	29994
20°	28411
25°	25659
30°	21794
35°	16095
40°	9310
45°	4938
50°	2797
55°	1462
60°	954
65°	675
70°	497
75°	360
80°	284
85°	314



TEST NUMBER: P593000

CATALOG NUMBER: HC605D010-HM60525950-61MDH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	53.3	8.6
10°-20°	147.8	23.9
20°-30°	192.9	31.2
30°-40°	147.4	23.8
40°-50°	53.4	8.6
50°-60°	15.5	2.5
60°-70°	5.5	0.9
70°-80°	1.9	0.3
80°-90°	0.4	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	394.0	63.7
0°-40°	541.4	87.6
0°-60°	610.4	98.7
0°-90°	618.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	618.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	565	
5°	562	53
15°	528	148
25°	424	193
35°	240	147
45°	64	53
55°	15	16
65°	5	6
75°	2	2
85°	0	0
90°	0	



TEST NUMBER: P593000

CATALOG NUMBER: HC605D010-HM60525950-61MDH

CANDELA DISTRIBUTION (FULL):

0°	
0°	564.7
2.5°	562.1
5°	562.1
7.5°	558.1
10°	549.9
12.5°	540.3
15°	528.5
17.5°	511.0
20°	487.0
22.5°	457.3
25°	424.2
27.5°	386.7
30°	344.3
32.5°	296.7
35°	240.5
37.5°	181.6
40°	130.1
42.5°	89.9
45°	63.7
47.5°	45.9
50°	32.8
52.5°	23.2
55°	15.3
57.5°	11.0
60°	8.7
62.5°	7.0
65°	5.2
67.5°	4.4
70°	3.1
72.5°	2.1
75°	1.7
77.5°	1.4
80°	0.9
82.5°	0.5
85°	0.5
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)