

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P583058

Luminaire Tested: **HC655D010-HM64560840-61WDWB**

Issue Date: 9/16/2021

**Test Information**

Test Method: LM-41-14  
Report Number: P583058  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2105-241-10)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 9/16/2021  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: HALO COMMERCIAL  
Catalog Number: HC655D010-HM64560840-61WDWB  
Description: HALO COMMERCIAL 6" ROUND, NEW CONSTRUCTION FRAME, WITH 6" WIDE DISTRIBUTION, WHITE BAFFLE TRIM  
Light Source: (1) HIGH LUMEN LED 80CRI / 4000K CCT  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 6251.5 lumens  
Efficiency: N/A  
Efficacy: 120.2 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.2 / 1.05  
Luminous Opening: Circular (Dia: 0.5' x H: 0')  
CIE Type: Direct


Input Watts (W): 52  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P583058

CATALOG NUMBER: HC655D010-HM64560840-61WDWB

### Luminous Intensity Polar Plot

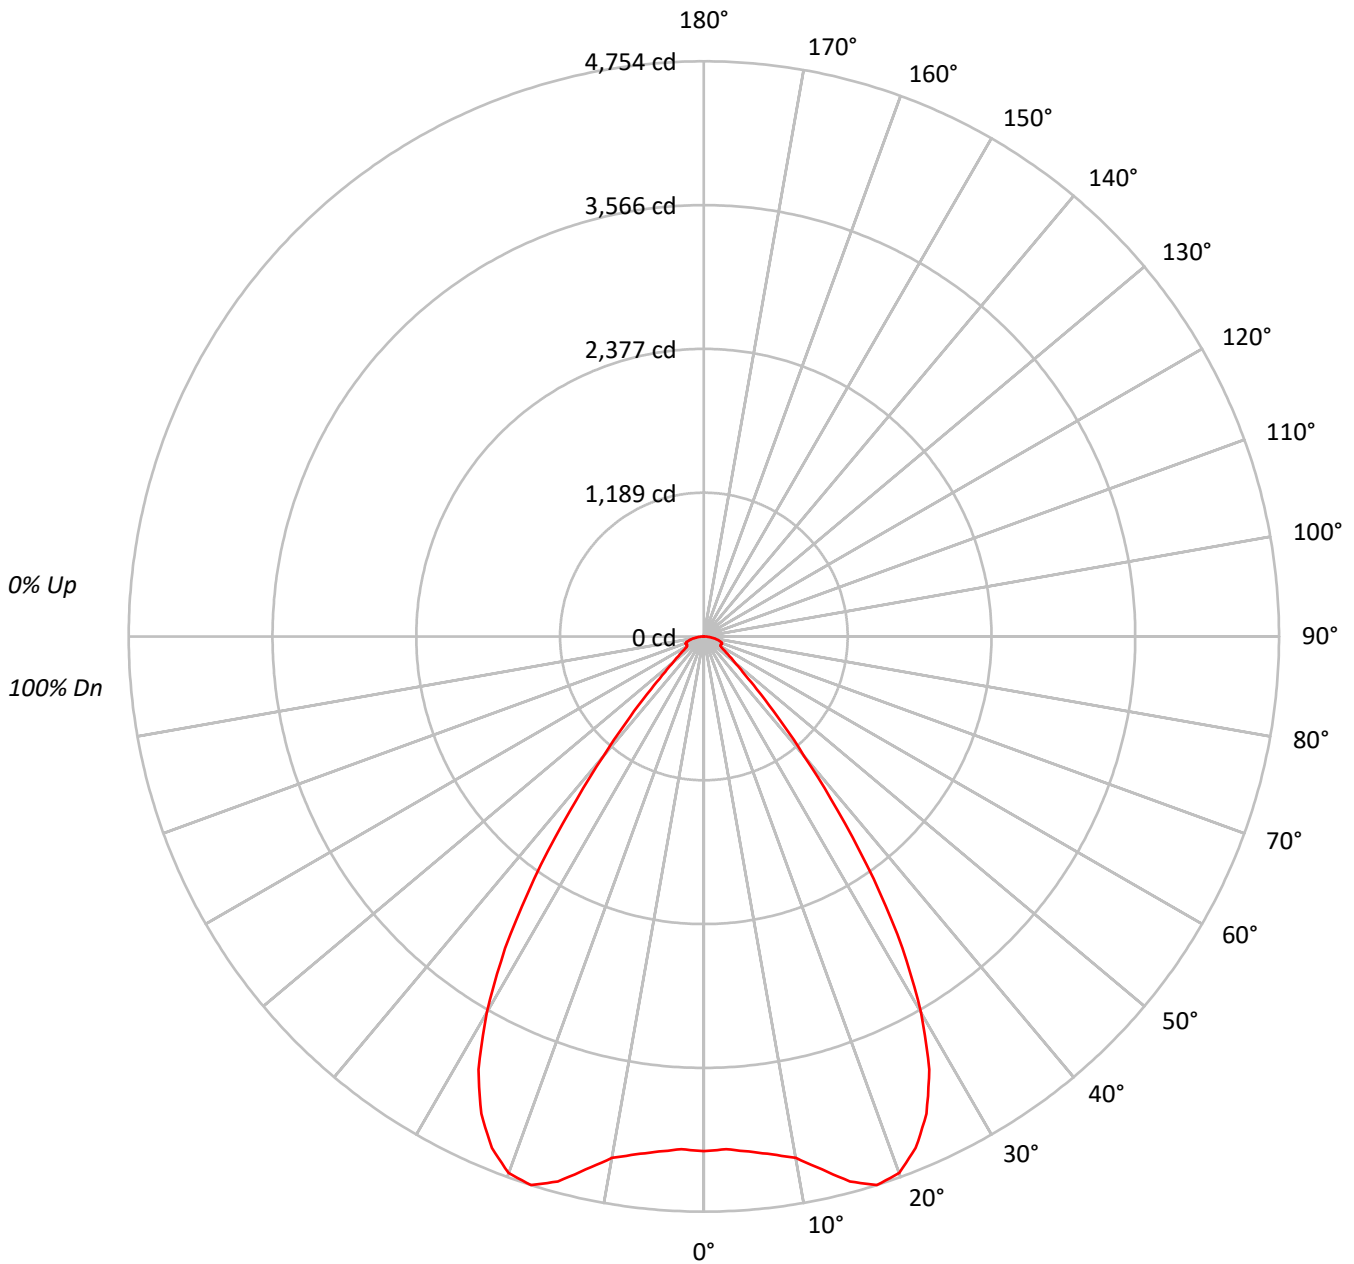



TEST NUMBER: P583058

CATALOG NUMBER: HC655D010-HM64560840-61WDWB

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |     |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|-----|
| RF  | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     | 20  |     |    |    |     |
| RC  | 80  |     |     |     | 70  |     |     |     | 50  |     |     |     | 30  |     |     |     | 10  |     |    | 0  |     |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30 | 10 | 0   |
| RCR |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |     |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 |    |    | 100 |
| 1   | 112 | 109 | 106 | 103 | 110 | 107 | 104 | 102 | 103 | 100 | 98  | 99  | 97  | 95  | 95  | 94  | 93  | 91  |    |    | 91  |
| 2   | 106 | 100 | 95  | 91  | 103 | 98  | 94  | 90  | 95  | 91  | 88  | 92  | 89  | 86  | 89  | 86  | 84  | 82  |    |    | 82  |
| 3   | 99  | 92  | 86  | 81  | 97  | 90  | 85  | 81  | 88  | 83  | 79  | 85  | 81  | 78  | 83  | 80  | 77  | 75  |    |    | 75  |
| 4   | 93  | 85  | 78  | 73  | 91  | 83  | 78  | 73  | 81  | 76  | 72  | 79  | 75  | 71  | 77  | 73  | 70  | 69  |    |    | 69  |
| 5   | 88  | 78  | 72  | 67  | 86  | 77  | 71  | 66  | 75  | 70  | 66  | 74  | 69  | 65  | 72  | 68  | 65  | 63  |    |    | 63  |
| 6   | 83  | 73  | 66  | 61  | 81  | 72  | 66  | 61  | 70  | 65  | 60  | 69  | 64  | 60  | 67  | 63  | 60  | 58  |    |    | 58  |
| 7   | 78  | 68  | 61  | 56  | 77  | 67  | 61  | 56  | 66  | 60  | 56  | 64  | 59  | 55  | 63  | 59  | 55  | 54  |    |    | 54  |
| 8   | 74  | 63  | 57  | 52  | 73  | 63  | 56  | 52  | 61  | 56  | 52  | 60  | 55  | 51  | 59  | 55  | 51  | 50  |    |    | 50  |
| 9   | 70  | 59  | 53  | 48  | 69  | 59  | 52  | 48  | 58  | 52  | 48  | 57  | 51  | 48  | 56  | 51  | 48  | 46  |    |    | 46  |
| 10  | 66  | 56  | 49  | 45  | 65  | 55  | 49  | 45  | 54  | 48  | 45  | 53  | 48  | 44  | 53  | 48  | 44  | 43  |    |    | 43  |

**AVERAGE LUMINANCE (cd/sqm):**

|     |        |
|-----|--------|
|     | 0°     |
| 0°  | 233161 |
| 5°  | 235147 |
| 10° | 243622 |
| 15° | 264627 |
| 20° | 275264 |
| 25° | 263277 |
| 30° | 227219 |
| 35° | 163607 |
| 40° | 92166  |
| 45° | 47765  |
| 50° | 28485  |
| 55° | 20511  |
| 60° | 17433  |
| 65° | 20106  |
| 70° | 25485  |
| 75° | 26942  |
| 80° | 26361  |
| 85° | 24971  |



TEST NUMBER: P583058

CATALOG NUMBER: HC655D010-HM64560840-61WDWB

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 411.2  | 6.6       |
| 10°-20°   | 1315.1 | 21.0      |
| 20°-30°   | 1965.6 | 31.4      |
| 30°-40°   | 1502.6 | 24.0      |
| 40°-50°   | 524.8  | 8.4       |
| 50°-60°   | 200.0  | 3.2       |
| 60°-70°   | 156.9  | 2.5       |
| 70°-80°   | 132.7  | 2.1       |
| 80°-90°   | 42.7   | 0.7       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| 0°-30°    | 3691.9 | 59.1      |
| 0°-40°    | 5194.5 | 83.1      |
| 0°-60°    | 5919.3 | 94.7      |
| 0°-90°    | 6251.5 | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 6251.5 | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°   | Flux |
|-----|------|------|
| 0°  | 4253 |      |
| 5°  | 4273 | 411  |
| 15° | 4663 | 1315 |
| 25° | 4353 | 1966 |
| 35° | 2445 | 1503 |
| 45° | 616  | 525  |
| 55° | 215  | 200  |
| 65° | 155  | 157  |
| 75° | 127  | 133  |
| 85° | 40   | 43   |
| 90° | 0    |      |



TEST NUMBER: P583058

CATALOG NUMBER: HC655D010-HM64560840-61WDWB

**CANDELA DISTRIBUTION (FULL):**

|       | 0°     |
|-------|--------|
| 0°    | 4253.2 |
| 2.5°  | 4241.3 |
| 5°    | 4273.1 |
| 7.5°  | 4316.9 |
| 10°   | 4376.5 |
| 12.5° | 4511.6 |
| 15°   | 4662.7 |
| 17.5° | 4754.1 |
| 20°   | 4718.4 |
| 22.5° | 4575.3 |
| 25°   | 4352.6 |
| 27.5° | 4034.6 |
| 30°   | 3589.5 |
| 32.5° | 3056.8 |
| 35°   | 2444.7 |
| 37.5° | 1812.6 |
| 40°   | 1287.9 |
| 42.5° | 902.3  |
| 45°   | 616.1  |
| 47.5° | 433.3  |
| 50°   | 334.0  |
| 52.5° | 262.4  |
| 55°   | 214.6  |
| 57.5° | 174.8  |
| 60°   | 159.0  |
| 62.5° | 155.0  |
| 65°   | 155.0  |
| 67.5° | 163.0  |
| 70°   | 159.0  |
| 72.5° | 147.0  |
| 75°   | 127.2  |
| 77.5° | 107.3  |
| 80°   | 83.5   |
| 82.5° | 59.6   |
| 85°   | 39.7   |
| 87.5° | 15.9   |
| 90°   | 0.0    |



Report Generated By 670245859 / DESKTOP-HRDQ47P







— 0°-180°







(END OF REPORT)