

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P583064

Luminaire Tested: **HC655D010-HM64560927-61MDH**

Issue Date: 9/16/2021

Test Information

Test Method: LM-41-14
Report Number: P583064
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2105-241-5)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 9/16/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC655D010-HM64560927-61MDH
Description: HALO COMMERCIAL 6" ROUND, NEW CONSTRUCTION FRAME, WITH 6" MEDIUM DISTRIBUTION, HAZE TRIM
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3985.1 lumens
Efficiency: N/A
Efficacy: 76.6 lumens/watt
Spacing Criteria (0/90/45): 1.01 / 1.01 / 0.97
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct


Input Watts (W): 52
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P583064

CATALOG NUMBER: HC655D010-HM64560927-61MDH

Luminous Intensity Polar Plot

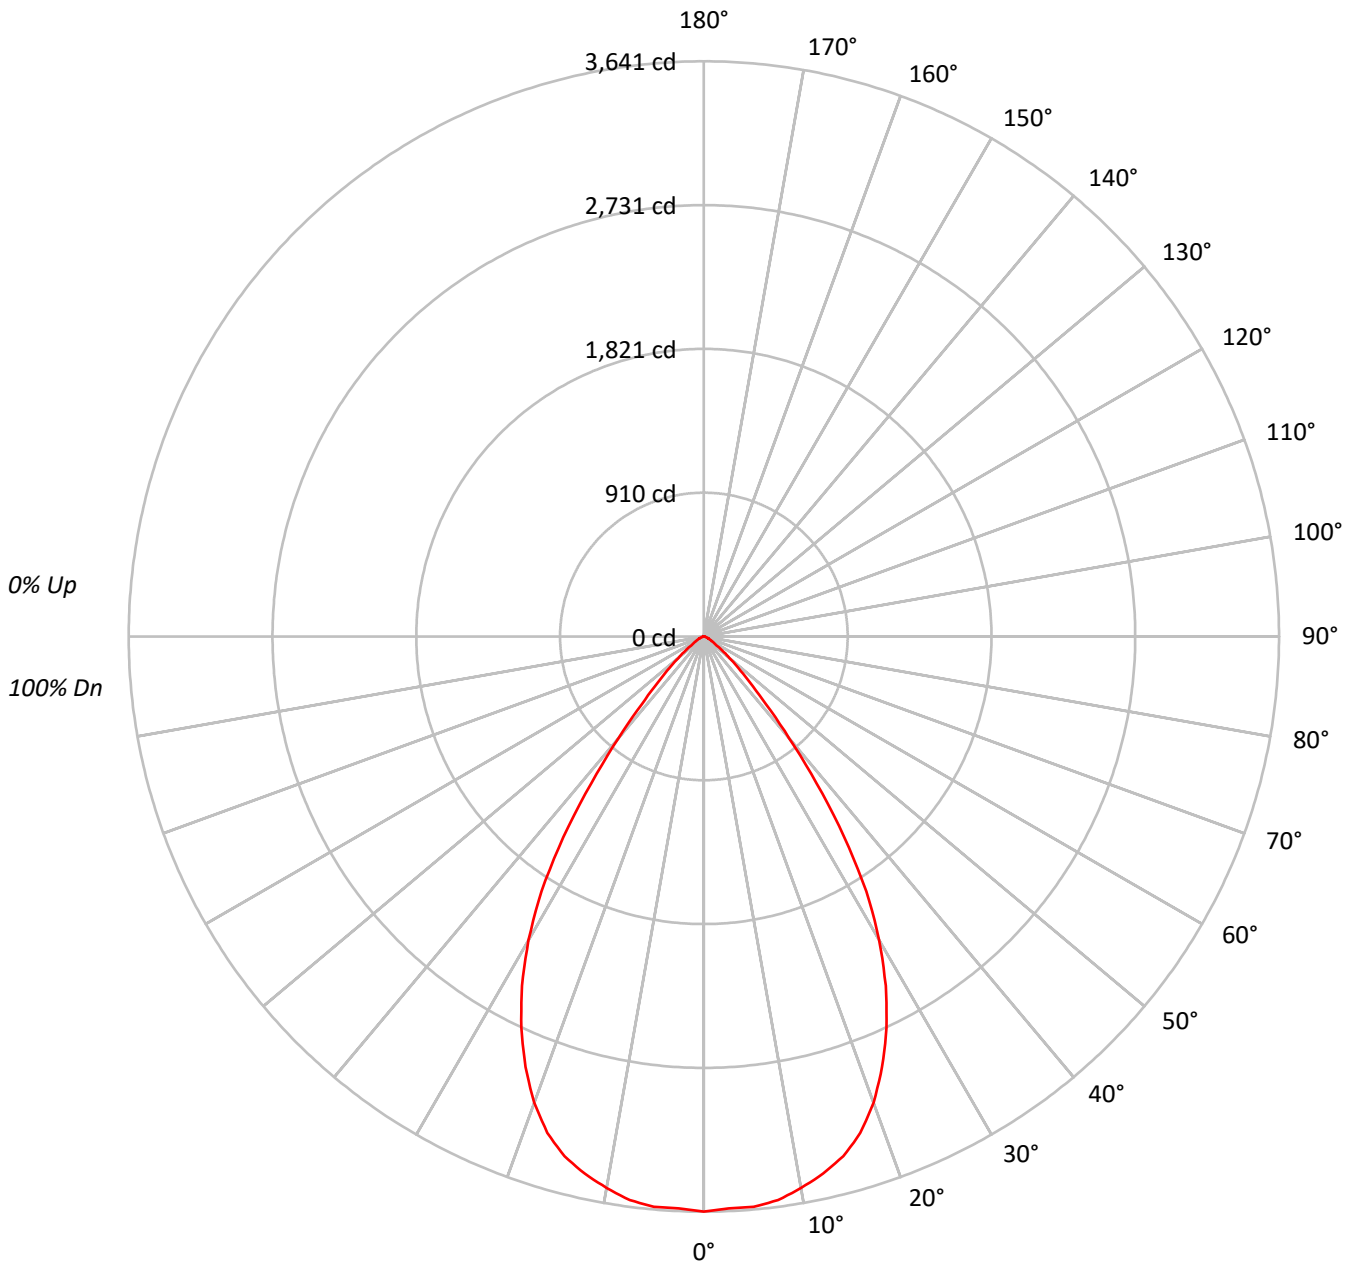



TEST NUMBER: P583064

CATALOG NUMBER: HC655D010-HM64560927-61MDH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	94	93	93	93	93
2	107	102	98	94	105	100	96	93	97	94	91	94	91	89	91	89	87	85	85	85	85
3	101	94	89	85	99	93	88	84	90	86	83	88	84	81	86	83	80	79	79	79	79
4	96	88	82	77	94	86	81	77	84	79	76	82	78	75	80	77	74	72	72	72	72
5	90	81	75	71	89	80	75	70	79	74	70	77	73	69	75	72	68	67	67	67	67
6	85	76	70	65	84	75	69	65	74	68	64	72	67	64	71	67	63	62	62	62	62
7	81	71	65	60	79	70	64	60	69	64	60	68	63	59	67	62	59	57	57	57	57
8	77	67	60	56	75	66	60	56	65	59	55	64	59	55	63	58	55	53	53	53	53
9	73	62	56	52	72	62	56	52	61	56	52	60	55	52	59	55	51	50	50	50	50
10	69	59	53	49	68	58	52	48	57	52	48	57	52	48	56	51	48	47	47	47	47

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	199589
5°	199422
10°	197341
15°	193378
20°	183177
25°	165415
30°	140522
35°	103751
40°	59998
45°	31841
50°	17995
55°	9405
60°	6173
65°	4371
70°	3142
75°	2372
80°	1799
85°	1761



TEST NUMBER: P583064

CATALOG NUMBER: HC655D010-HM64560927-61MDH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	343.4	8.6
10°-20°	953.0	23.9
20°-30°	1243.8	31.2
30°-40°	950.5	23.9
40°-50°	344.1	8.6
50°-60°	100.0	2.5
60°-70°	35.7	0.9
70°-80°	12.2	0.3
80°-90°	2.3	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2540.2	63.7
0°-40°	3490.7	87.6
0°-60°	3934.8	98.7
0°-90°	3985.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3985.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3641	
5°	3624	343
15°	3407	953
25°	2735	1244
35°	1550	951
45°	411	344
55°	98	100
65°	34	36
75°	11	12
85°	3	2
90°	0	



TEST NUMBER: P583064

CATALOG NUMBER: HC655D010-HM64560927-61MDH

CANDELA DISTRIBUTION (FULL):

	0°
0°	3640.8
2.5°	3623.9
5°	3623.9
7.5°	3598.6
10°	3545.1
12.5°	3483.2
15°	3407.3
17.5°	3294.7
20°	3139.9
22.5°	2948.6
25°	2734.7
27.5°	2492.8
30°	2219.9
32.5°	1913.3
35°	1550.3
37.5°	1170.5
40°	838.4
42.5°	579.6
45°	410.7
47.5°	295.4
50°	211.0
52.5°	149.2
55°	98.4
57.5°	70.4
60°	56.3
62.5°	45.1
65°	33.7
67.5°	28.2
70°	19.6
72.5°	14.1
75°	11.2
77.5°	8.4
80°	5.7
82.5°	2.8
85°	2.8
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)