

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P583098

Luminaire Tested: **HC6R55D010-HM64560930-62RMDC**

Issue Date: 9/16/2021

Test Information

Test Method: LM-41-14
Report Number: P583098
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2105-241-13)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 9/16/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC6R55D010-HM64560930-62RMDC
Description: HALO COMMERCIAL 6" ROUND, RETROFIT FRAME, WITH 6" MEDIUM DISTRIBUTION, SPECULAR TRIM
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5295.1 lumens
Efficiency: N/A
Efficacy: 101.8 lumens/watt
Spacing Criteria (0/90/45): 1.08 / 1.08 / 0.96
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct


Input Watts (W): 52
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P583098

CATALOG NUMBER: HC6R55D010-HM64560930-62RMDC

Luminous Intensity Polar Plot

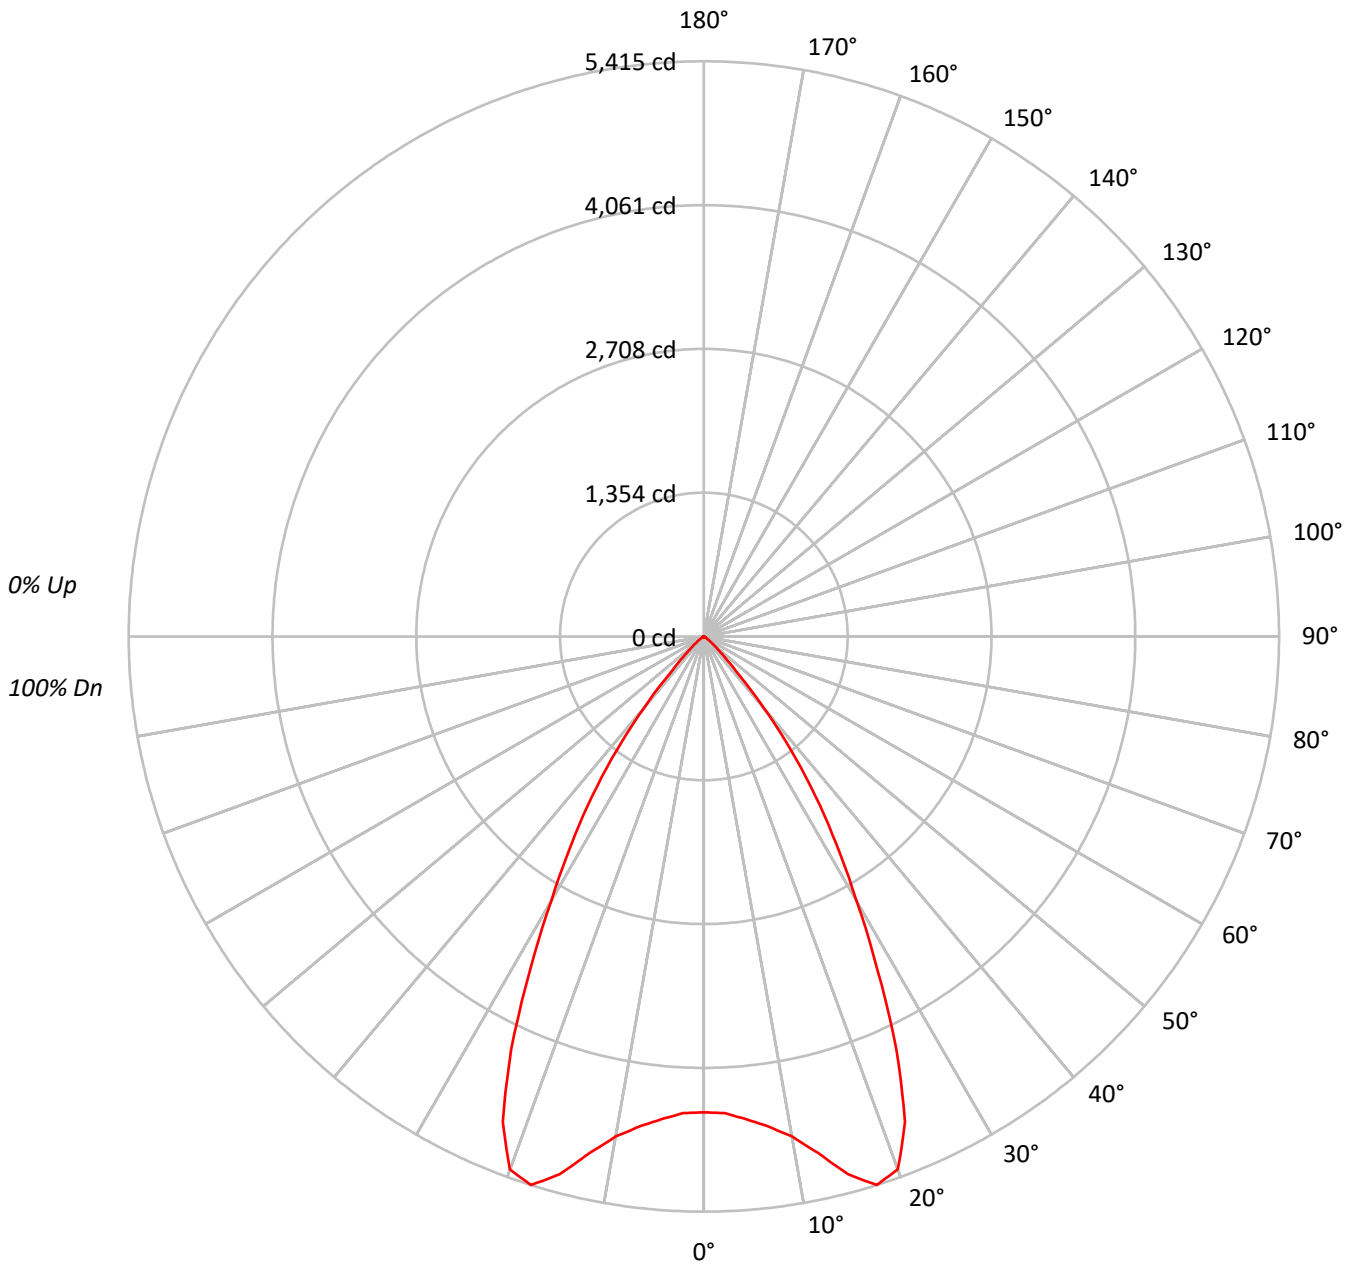



TEST NUMBER: P583098

CATALOG NUMBER: HC6R55D010-HM64560930-62RMDC

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10		0		
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	114	111	108	106	111	109	106	104	105	103	101	101	99	98	97	96	95	94			
2	108	103	99	96	106	101	98	95	98	95	92	95	93	91	92	90	89	87			
3	102	96	91	87	100	95	90	86	92	88	85	90	86	84	87	85	82	81			
4	97	90	84	80	95	89	83	79	86	82	79	84	81	78	83	79	77	75			
5	92	84	78	74	91	83	77	73	81	76	73	79	75	72	78	74	71	70			
6	88	79	73	68	86	78	72	68	76	71	68	75	71	67	74	70	67	65			
7	83	74	68	64	82	73	67	63	72	67	63	71	66	63	70	65	62	61			
8	79	69	63	59	78	69	63	59	68	63	59	67	62	59	66	62	58	57			
9	75	65	59	55	74	65	59	55	64	59	55	63	58	55	62	58	55	53			
10	72	62	56	52	71	61	56	52	60	55	52	60	55	52	59	55	51	50			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	245611
5°	250984
10°	266044
15°	297385
20°	311370
25°	259612
30°	181693
35°	122362
40°	63018
45°	21894
50°	9748
55°	3211
60°	1480
65°	1310
70°	1074
75°	699
80°	1042
85°	0



TEST NUMBER: P583098

CATALOG NUMBER: HC6R55D010-HM64560930-62RMDC

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	442.1	8.3
10°-20°	1476.4	27.9
20°-30°	1918.7	36.2
30°-40°	1133.4	21.4
40°-50°	270.4	5.1
50°-60°	39.8	0.8
60°-70°	10.0	0.2
70°-80°	3.9	0.1
80°-90°	0.4	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3837.1	72.5
0°-40°	4970.5	93.9
0°-60°	5280.8	99.7
0°-90°	5295.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5295.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4480	
5°	4561	442
15°	5240	1476
25°	4292	1919
35°	1828	1133
45°	282	270
55°	34	40
65°	10	10
75°	3	4
85°	0	0
90°	0	



TEST NUMBER: P583098

CATALOG NUMBER: HC6R55D010-HM64560930-62RMDC

CANDELA DISTRIBUTION (FULL):

	0°
0°	4480.3
2.5°	4490.3
5°	4560.9
7.5°	4651.7
10°	4779.3
12.5°	4981.0
15°	5239.9
17.5°	5414.6
20°	5337.3
22.5°	4947.4
25°	4292.0
27.5°	3542.5
30°	2870.3
32.5°	2322.5
35°	1828.4
37.5°	1344.4
40°	880.6
42.5°	480.7
45°	282.4
47.5°	174.7
50°	114.3
52.5°	67.2
55°	33.6
57.5°	16.8
60°	13.5
62.5°	13.5
65°	10.1
67.5°	6.7
70°	6.7
72.5°	3.3
75°	3.3
77.5°	3.3
80°	3.3
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)