

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P583206

Luminaire Tested: **HC6R60D010-HM64560840-62RMDC**

Issue Date: 9/16/2021

Test Information

Test Method: LM-41-14
Report Number: P583206
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2105-241-13)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 9/16/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC6R60D010-HM64560840-62RMDC
Description: HALO COMMERCIAL 6" ROUND, RETROFIT FRAME, WITH 6" MEDIUM DISTRIBUTION, SPECULAR TRIM
Light Source: (1) HIGH LUMEN LED 80CRI / 4000K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6530.4 lumens
Efficiency: N/A
Efficacy: 118.7 lumens/watt
Spacing Criteria (0/90/45): 1.08 / 1.08 / 0.96
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct


Input Watts (W): 55
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P583206

CATALOG NUMBER: HC6R60D010-HM64560840-62RMDC

Luminous Intensity Polar Plot

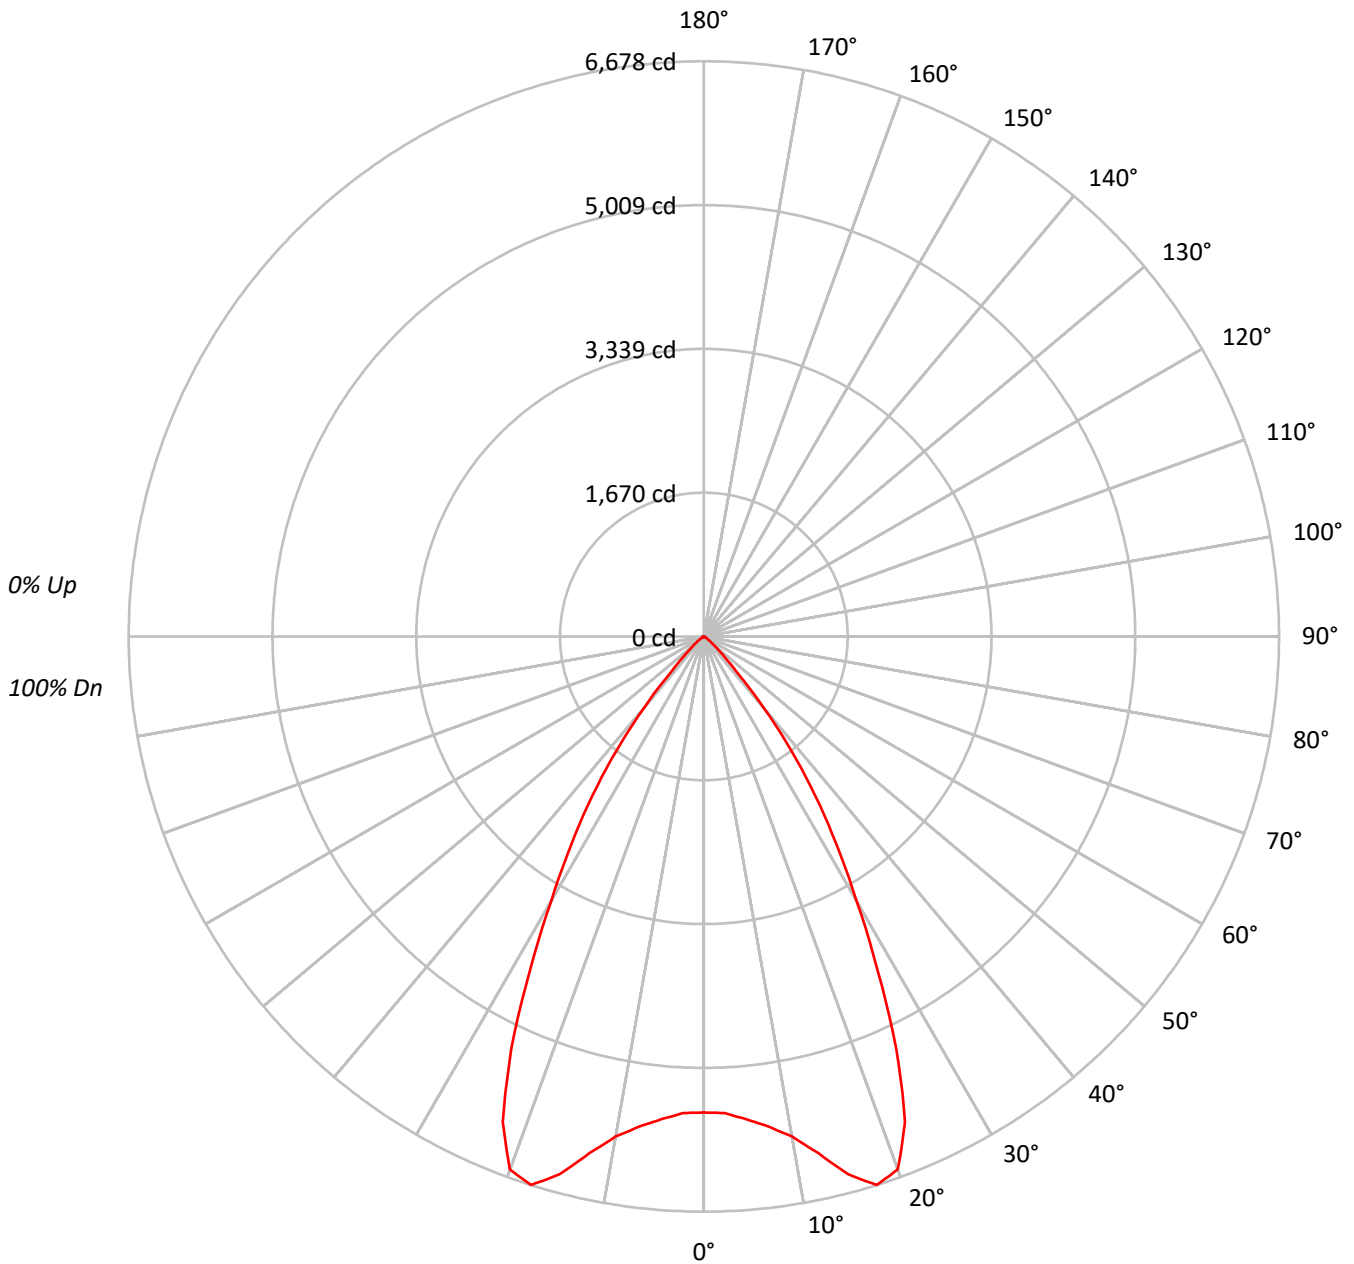



TEST NUMBER: P583206

CATALOG NUMBER: HC6R60D010-HM64560840-62RMDC

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	114	111	108	106	111	109	106	104	105	103	101	101	99	98	97	96	95	94			
2	108	103	99	96	106	101	98	95	98	95	92	95	93	91	92	90	89	87			
3	102	96	91	87	100	95	90	86	92	88	85	90	86	84	87	85	82	81			
4	97	90	84	80	95	89	83	79	86	82	79	84	81	78	83	79	77	75			
5	92	84	78	74	91	83	77	73	81	76	73	79	75	72	78	74	71	70			
6	88	79	73	68	86	78	72	68	76	71	68	75	71	67	74	70	67	65			
7	83	74	68	64	82	73	67	63	72	67	63	71	66	63	70	65	62	61			
8	79	69	63	59	78	69	63	59	68	63	59	67	62	59	66	62	58	57			
9	75	65	59	55	74	65	59	55	64	59	55	63	58	55	62	58	55	53			
10	72	62	56	52	71	61	56	52	60	55	52	60	55	52	59	55	51	50			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	302903
5°	309530
10°	328111
15°	366750
20°	384007
25°	320178
30°	224079
35°	150905
40°	77717
45°	26995
50°	12025
55°	3966
60°	1820
65°	1608
70°	1330
75°	868
80°	1294
85°	0



TEST NUMBER: P583206

CATALOG NUMBER: HC6R60D010-HM64560840-62RMDC

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	545.2	8.3
10°-20°	1820.7	27.9
20°-30°	2366.3	36.2
30°-40°	1397.8	21.4
40°-50°	333.5	5.1
50°-60°	49.2	0.8
60°-70°	12.3	0.2
70°-80°	4.9	0.1
80°-90°	0.6	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4732.3	72.5
0°-40°	6130.0	93.9
0°-60°	6512.7	99.7
0°-90°	6530.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6530.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	5525	
5°	5625	545
15°	6462	1821
25°	5293	2366
35°	2255	1398
45°	348	333
55°	42	49
65°	12	12
75°	4	5
85°	0	1
90°	0	



TEST NUMBER: P583206

CATALOG NUMBER: HC6R60D010-HM64560840-62RMDC

CANDELA DISTRIBUTION (FULL):

0°	
0°	5525.4
2.5°	5537.8
5°	5624.8
7.5°	5736.7
10°	5894.3
12.5°	6143.0
15°	6462.1
17.5°	6677.7
20°	6582.4
22.5°	6101.6
25°	5293.3
27.5°	4368.9
30°	3539.9
32.5°	2864.2
35°	2254.9
37.5°	1658.1
40°	1086.0
42.5°	592.8
45°	348.2
47.5°	215.6
50°	141.0
52.5°	83.0
55°	41.5
57.5°	20.7
60°	16.6
62.5°	16.6
65°	12.4
67.5°	8.3
70°	8.3
72.5°	4.1
75°	4.1
77.5°	4.1
80°	4.1
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)