

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P583315

Luminaire Tested: **HC607D010-HM60525835-61MDC**

Issue Date: 9/16/2021

Test Information

Test Method: LM-41-14
Report Number: P583315
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2105-241-4)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 9/16/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC607D010-HM60525835-61MDC
Description: HALO COMMERCIAL 6" ROUND, NEW CONSTRUCTION FRAME, WITH 6" MEDIUM DISTRIBUTION, SPECULAR TRIM
Light Source: (1) HIGH LUMEN LED 80CRI / 3500K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1012.5 lumens
Efficiency: N/A
Efficacy: 126.6 lumens/watt
Spacing Criteria (0/90/45): 1.06 / 1.06 / 0.96
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct


Input Watts (W): 8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P583315

CATALOG NUMBER: HC607D010-HM60525835-61MDC

Luminous Intensity Polar Plot

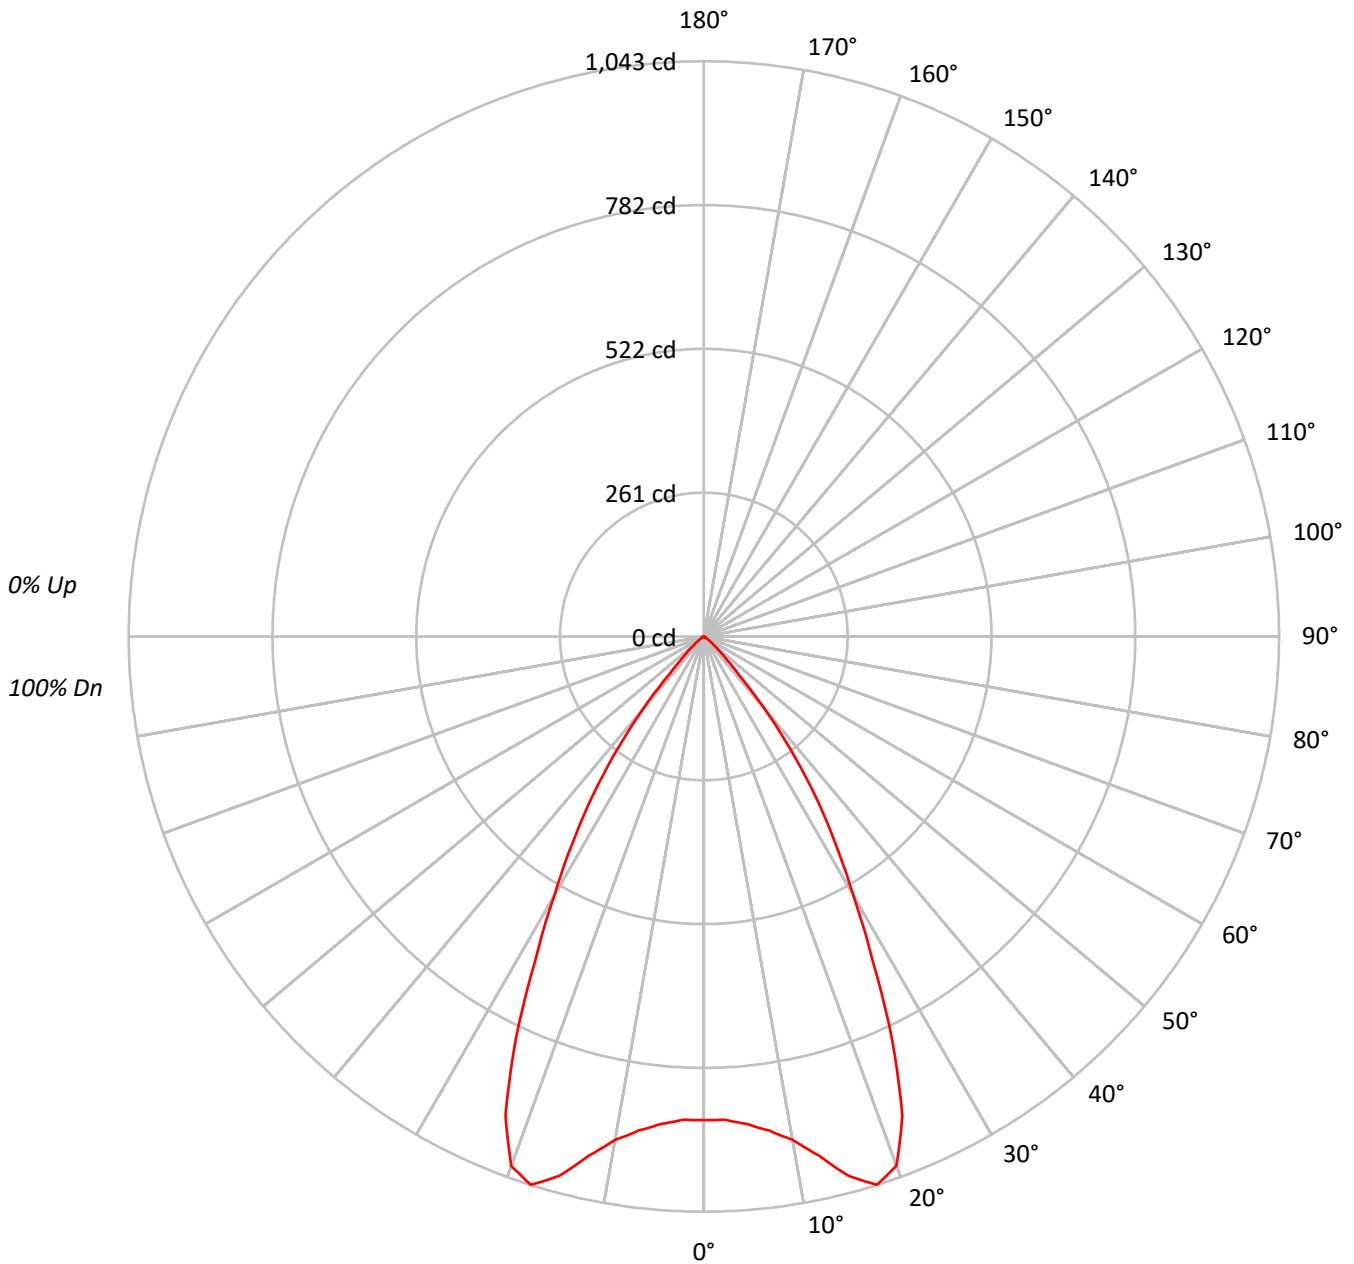



TEST NUMBER: P583315

CATALOG NUMBER: HC607D010-HM60525835-61MDC

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	114	111	108	106	111	109	106	104	105	103	101	101	99	98	97	96	95	94			
2	108	103	99	96	106	101	98	95	98	95	93	95	93	91	92	90	89	87			
3	102	96	91	87	100	95	90	86	92	88	85	90	86	84	87	85	82	81			
4	97	90	84	80	95	89	83	79	86	82	79	84	81	78	83	79	77	75			
5	92	84	78	74	91	83	78	73	81	76	73	80	75	72	78	74	72	70			
6	88	79	73	68	86	78	72	68	76	71	68	75	71	67	74	70	67	65			
7	83	74	68	64	82	73	67	63	72	67	63	71	66	63	70	66	62	61			
8	79	70	63	59	78	69	63	59	68	63	59	67	62	59	66	62	58	57			
9	75	66	60	56	74	65	59	55	64	59	55	63	58	55	62	58	55	54			
10	72	62	56	52	71	61	56	52	61	55	52	60	55	52	59	55	52	50			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	48083
5°	48833
10°	51608
15°	57469
20°	59593
25°	48898
30°	34258
35°	23376
40°	12180
45°	4280
50°	1910
55°	621
60°	351
65°	246
70°	192
75°	148
80°	0
85°	0



TEST NUMBER: P583315

CATALOG NUMBER: HC607D010-HM60525835-61MDC

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	86.0	8.5
10°-20°	284.8	28.1
20°-30°	362.6	35.8
30°-40°	216.1	21.3
40°-50°	52.4	5.2
50°-60°	8.1	0.8
60°-70°	1.9	0.2
70°-80°	0.7	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	733.3	72.4
0°-40°	949.4	93.8
0°-60°	1009.9	99.7
0°-90°	1012.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1012.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	877	
5°	887	86
15°	1013	285
25°	808	363
35°	349	216
45°	55	52
55°	6	8
65°	2	2
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P583315

CATALOG NUMBER: HC607D010-HM60525835-61MDC

CANDELA DISTRIBUTION (FULL):

	0°
0°	877.1
2.5°	877.1
5°	887.4
7.5°	903.5
10°	927.1
12.5°	964.4
15°	1012.6
17.5°	1042.7
20°	1021.5
22.5°	940.1
25°	808.4
27.5°	663.3
30°	541.2
32.5°	442.4
35°	349.3
37.5°	257.5
40°	170.2
42.5°	91.8
45°	55.2
47.5°	34.7
50°	22.4
52.5°	13.5
55°	6.5
57.5°	3.9
60°	3.2
62.5°	2.6
65°	1.9
67.5°	1.2
70°	1.2
72.5°	0.7
75°	0.7
77.5°	0.7
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)