

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P583406

Luminaire Tested: **HC607D010-HM60525940-61MDH**

Issue Date: 9/16/2021

Test Information

Test Method: LM-41-14
Report Number: P583406
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2105-241-5)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 9/16/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC607D010-HM60525940-61MDH
Description: HALO COMMERCIAL 6" ROUND, NEW CONSTRUCTION FRAME, WITH 6" MEDIUM DISTRIBUTION, HAZE TRIM
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 818.1 lumens
Efficiency: N/A
Efficacy: 102.3 lumens/watt
Spacing Criteria (0/90/45): 1.01 / 1.01 / 0.97
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct


Input Watts (W): 8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P583406

CATALOG NUMBER: HC607D010-HM60525940-61MDH

Luminous Intensity Polar Plot

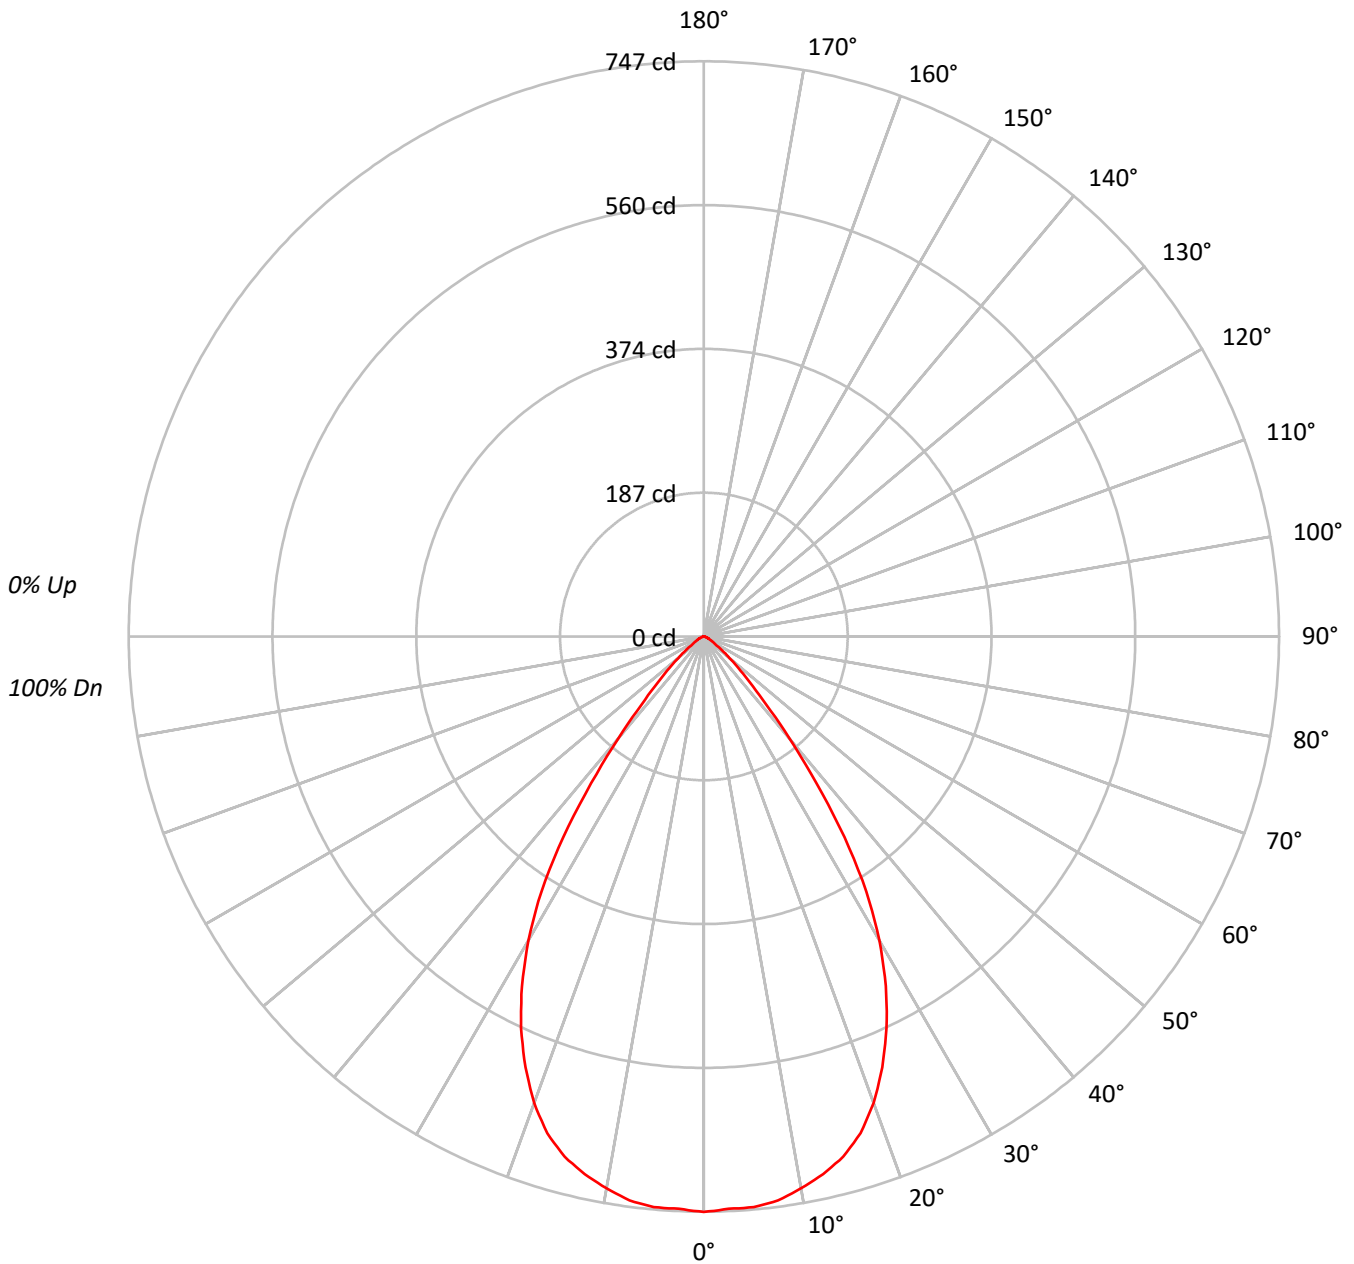



TEST NUMBER: P583406

CATALOG NUMBER: HC607D010-HM60525940-61MDH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

| | | | | | | | | | | | | | | | | | | | | | |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| RF | 20 | | | | 20 | | | | 20 | | | | 20 | | | | 20 | | | | |
| RC | 80 | | | | 70 | | | | 50 | | | | 30 | | | | 10 | | | 0 | |
| RW | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 0 |
| RCR | | | | | | | | | | | | | | | | | | | | | |
| 0 | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 | 100 | 100 | 100 |
| 1 | 113 | 110 | 108 | 105 | 111 | 108 | 106 | 104 | 104 | 102 | 100 | 100 | 99 | 97 | 97 | 96 | 94 | 93 | 93 | 93 | 93 |
| 2 | 107 | 102 | 98 | 94 | 105 | 100 | 96 | 93 | 97 | 94 | 91 | 94 | 91 | 89 | 91 | 89 | 87 | 85 | 85 | 85 | 85 |
| 3 | 101 | 94 | 89 | 85 | 99 | 93 | 88 | 84 | 90 | 86 | 83 | 88 | 84 | 81 | 86 | 83 | 80 | 79 | 79 | 79 | 79 |
| 4 | 96 | 88 | 82 | 77 | 94 | 86 | 81 | 77 | 84 | 79 | 76 | 82 | 78 | 75 | 80 | 77 | 74 | 72 | 72 | 72 | 72 |
| 5 | 90 | 81 | 75 | 71 | 89 | 80 | 75 | 70 | 79 | 74 | 70 | 77 | 73 | 69 | 75 | 72 | 68 | 67 | 67 | 67 | 67 |
| 6 | 85 | 76 | 70 | 65 | 84 | 75 | 69 | 65 | 74 | 68 | 64 | 72 | 67 | 64 | 71 | 67 | 63 | 62 | 62 | 62 | 62 |
| 7 | 81 | 71 | 65 | 60 | 79 | 70 | 64 | 60 | 69 | 64 | 60 | 68 | 63 | 59 | 67 | 62 | 59 | 57 | 57 | 57 | 57 |
| 8 | 77 | 67 | 60 | 56 | 75 | 66 | 60 | 56 | 65 | 59 | 55 | 64 | 59 | 55 | 63 | 58 | 55 | 53 | 53 | 53 | 53 |
| 9 | 73 | 62 | 56 | 52 | 72 | 62 | 56 | 52 | 61 | 56 | 52 | 60 | 55 | 52 | 59 | 55 | 51 | 50 | 50 | 50 | 50 |
| 10 | 69 | 59 | 53 | 49 | 68 | 58 | 52 | 48 | 57 | 52 | 48 | 57 | 52 | 48 | 56 | 51 | 48 | 47 | 47 | 47 | 47 |

AVERAGE LUMINANCE (cd/sqm):

| | |
|-----|-------|
| | 0° |
| 0° | 40973 |
| 5° | 40942 |
| 10° | 40514 |
| 15° | 39699 |
| 20° | 37611 |
| 25° | 33964 |
| 30° | 28853 |
| 35° | 21302 |
| 40° | 12316 |
| 45° | 6536 |
| 50° | 3693 |
| 55° | 1931 |
| 60° | 1272 |
| 65° | 895 |
| 70° | 657 |
| 75° | 487 |
| 80° | 347 |
| 85° | 377 |



TEST NUMBER: P583406

CATALOG NUMBER: HC607D010-HM60525940-61MDH

ZONAL LUMENS:

| Zone | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10° | 70.5 | 8.6 |
| 10°-20° | 195.6 | 23.9 |
| 20°-30° | 255.4 | 31.2 |
| 30°-40° | 195.1 | 23.9 |
| 40°-50° | 70.6 | 8.6 |
| 50°-60° | 20.5 | 2.5 |
| 60°-70° | 7.4 | 0.9 |
| 70°-80° | 2.5 | 0.3 |
| 80°-90° | 0.5 | 0.1 |
| 90°-100° | 0.0 | 0.0 |
| 100°-110° | 0.0 | 0.0 |
| 110°-120° | 0.0 | 0.0 |
| 120°-130° | 0.0 | 0.0 |
| 130°-140° | 0.0 | 0.0 |
| 140°-150° | 0.0 | 0.0 |
| 150°-160° | 0.0 | 0.0 |
| 160°-170° | 0.0 | 0.0 |
| 170°-180° | 0.0 | 0.0 |
| 0°-30° | 521.5 | 63.7 |
| 0°-40° | 716.7 | 87.6 |
| 0°-60° | 807.8 | 98.7 |
| 0°-90° | 818.1 | 100.0 |
| 90°-120° | 0.0 | 0.0 |
| 90°-150° | 0.0 | 0.0 |
| 90°-180° | 0.0 | 0.0 |
| 0°-180° | 818.1 | 100.0 |

CANDELA DISTRIBUTION:

| | 0° | Flux |
|-----|-----|------|
| 0° | 747 | |
| 5° | 744 | 71 |
| 15° | 700 | 196 |
| 25° | 562 | 255 |
| 35° | 318 | 195 |
| 45° | 84 | 71 |
| 55° | 20 | 21 |
| 65° | 7 | 7 |
| 75° | 2 | 2 |
| 85° | 1 | 0 |
| 90° | 0 | |



TEST NUMBER: P583406

CATALOG NUMBER: HC607D010-HM60525940-61MDH

CANDELA DISTRIBUTION (FULL):

| | 0° |
|-------|-------|
| 0° | 747.4 |
| 2.5° | 744.0 |
| 5° | 744.0 |
| 7.5° | 738.8 |
| 10° | 727.8 |
| 12.5° | 715.1 |
| 15° | 699.5 |
| 17.5° | 676.4 |
| 20° | 644.7 |
| 22.5° | 605.4 |
| 25° | 561.5 |
| 27.5° | 511.8 |
| 30° | 455.8 |
| 32.5° | 392.8 |
| 35° | 318.3 |
| 37.5° | 240.3 |
| 40° | 172.1 |
| 42.5° | 119.0 |
| 45° | 84.3 |
| 47.5° | 60.6 |
| 50° | 43.3 |
| 52.5° | 30.6 |
| 55° | 20.2 |
| 57.5° | 14.4 |
| 60° | 11.6 |
| 62.5° | 9.3 |
| 65° | 6.9 |
| 67.5° | 5.8 |
| 70° | 4.1 |
| 72.5° | 2.8 |
| 75° | 2.3 |
| 77.5° | 1.7 |
| 80° | 1.1 |
| 82.5° | 0.6 |
| 85° | 0.6 |
| 87.5° | 0.0 |
| 90° | 0.0 |



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)