

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P583405

Luminaire Tested: **HC607D010-HM60525940-61MDC**

Issue Date: 9/16/2021

Test Information

Test Method: LM-41-14
Report Number: P583405
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2105-241-4)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 9/16/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC607D010-HM60525940-61MDC
Description: HALO COMMERCIAL 6" ROUND, NEW CONSTRUCTION FRAME, WITH 6" MEDIUM DISTRIBUTION, SPECULAR TRIM
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 910.5 lumens
Efficiency: N/A
Efficacy: 113.8 lumens/watt
Spacing Criteria (0/90/45): 1.06 / 1.06 / 0.96
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct


Input Watts (W): 8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P583405

CATALOG NUMBER: HC607D010-HM60525940-61MDC

Luminous Intensity Polar Plot

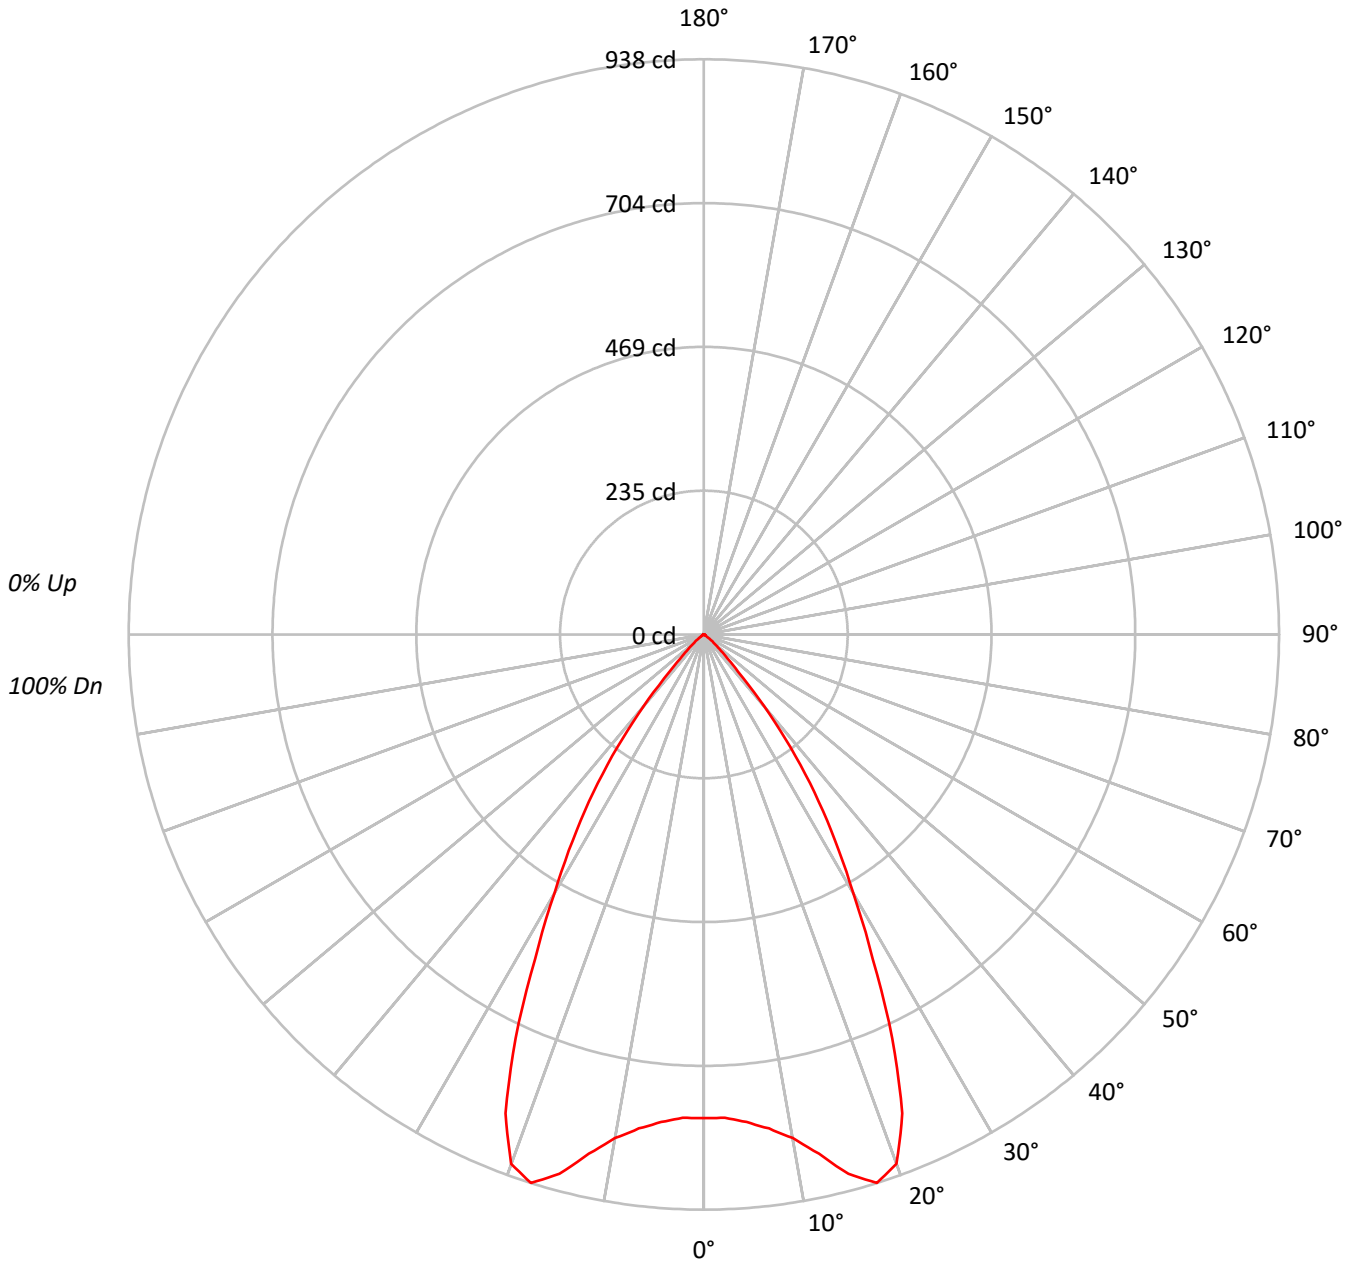



TEST NUMBER: P583405

CATALOG NUMBER: HC607D010-HM60525940-61MDC

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	114	111	108	106	111	109	106	104	105	103	101	101	99	98	97	96	95	94		
2	108	103	99	96	106	101	98	95	98	95	93	95	93	91	92	90	89	87		
3	102	96	91	87	100	95	90	86	92	88	85	90	86	84	87	85	82	81		
4	97	90	84	80	95	89	83	80	86	82	79	84	81	78	83	79	77	75		
5	92	84	78	74	91	83	78	73	81	76	73	80	75	72	78	74	72	70		
6	88	79	73	68	86	78	72	68	76	71	68	75	71	67	74	70	67	65		
7	83	74	68	64	82	73	68	63	72	67	63	71	66	63	70	66	62	61		
8	79	70	63	59	78	69	63	59	68	63	59	67	62	59	66	62	58	57		
9	75	66	60	56	74	65	59	55	64	59	55	63	58	55	62	58	55	54		
10	72	62	56	52	71	61	56	52	61	55	52	60	55	52	59	55	52	50		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	43242
5°	43914
10°	46414
15°	51680
20°	53590
25°	43968
30°	30809
35°	21021
40°	10956
45°	3845
50°	1723
55°	554
60°	307
65°	221
70°	176
75°	127
80°	0
85°	0



TEST NUMBER: P583405

CATALOG NUMBER: HC607D010-HM60525940-61MDC

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	77.3	8.5
10°-20°	256.1	28.1
20°-30°	326.1	35.8
30°-40°	194.3	21.3
40°-50°	47.1	5.2
50°-60°	7.2	0.8
60°-70°	1.7	0.2
70°-80°	0.6	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	659.5	72.4
0°-40°	853.8	93.8
0°-60°	908.2	99.7
0°-90°	910.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	910.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	789	
5°	798	77
15°	911	256
25°	727	326
35°	314	194
45°	50	47
55°	6	7
65°	2	2
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P583405

CATALOG NUMBER: HC607D010-HM60525940-61MDC

CANDELA DISTRIBUTION (FULL):

	0°
0°	788.8
2.5°	788.8
5°	798.0
7.5°	812.5
10°	833.8
12.5°	867.3
15°	910.6
17.5°	937.8
20°	918.6
22.5°	845.3
25°	726.9
27.5°	596.5
30°	486.7
32.5°	397.8
35°	314.1
37.5°	231.6
40°	153.1
42.5°	82.6
45°	49.6
47.5°	31.2
50°	20.2
52.5°	12.1
55°	5.8
57.5°	3.5
60°	2.8
62.5°	2.3
65°	1.7
67.5°	1.1
70°	1.1
72.5°	0.6
75°	0.6
77.5°	0.6
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)