

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P583415

Luminaire Tested: **HC607D010-HM60525940-61WDC**

Issue Date: 9/16/2021

**Test Information**

Test Method: LM-41-14  
Report Number: P583415  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2105-241-7)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 9/16/2021  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: HALO COMMERCIAL  
Catalog Number: HC607D010-HM60525940-61WDC  
Description: HALO COMMERCIAL 6" ROUND, NEW CONSTRUCTION FRAME, WITH 6" WIDE DISTRIBUTION, SPECULAR TRIM  
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 931.3 lumens  
Efficiency: N/A  
Efficacy: 116.4 lumens/watt  
Spacing Criteria (0/90/45): 1.28 / 1.28 / 1.09  
Luminous Opening: Circular (Dia: 0.5' x H: 0')  
CIE Type: Direct


Input Watts (W): 8  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P583415

CATALOG NUMBER: HC607D010-HM60525940-61WDC

### Luminous Intensity Polar Plot

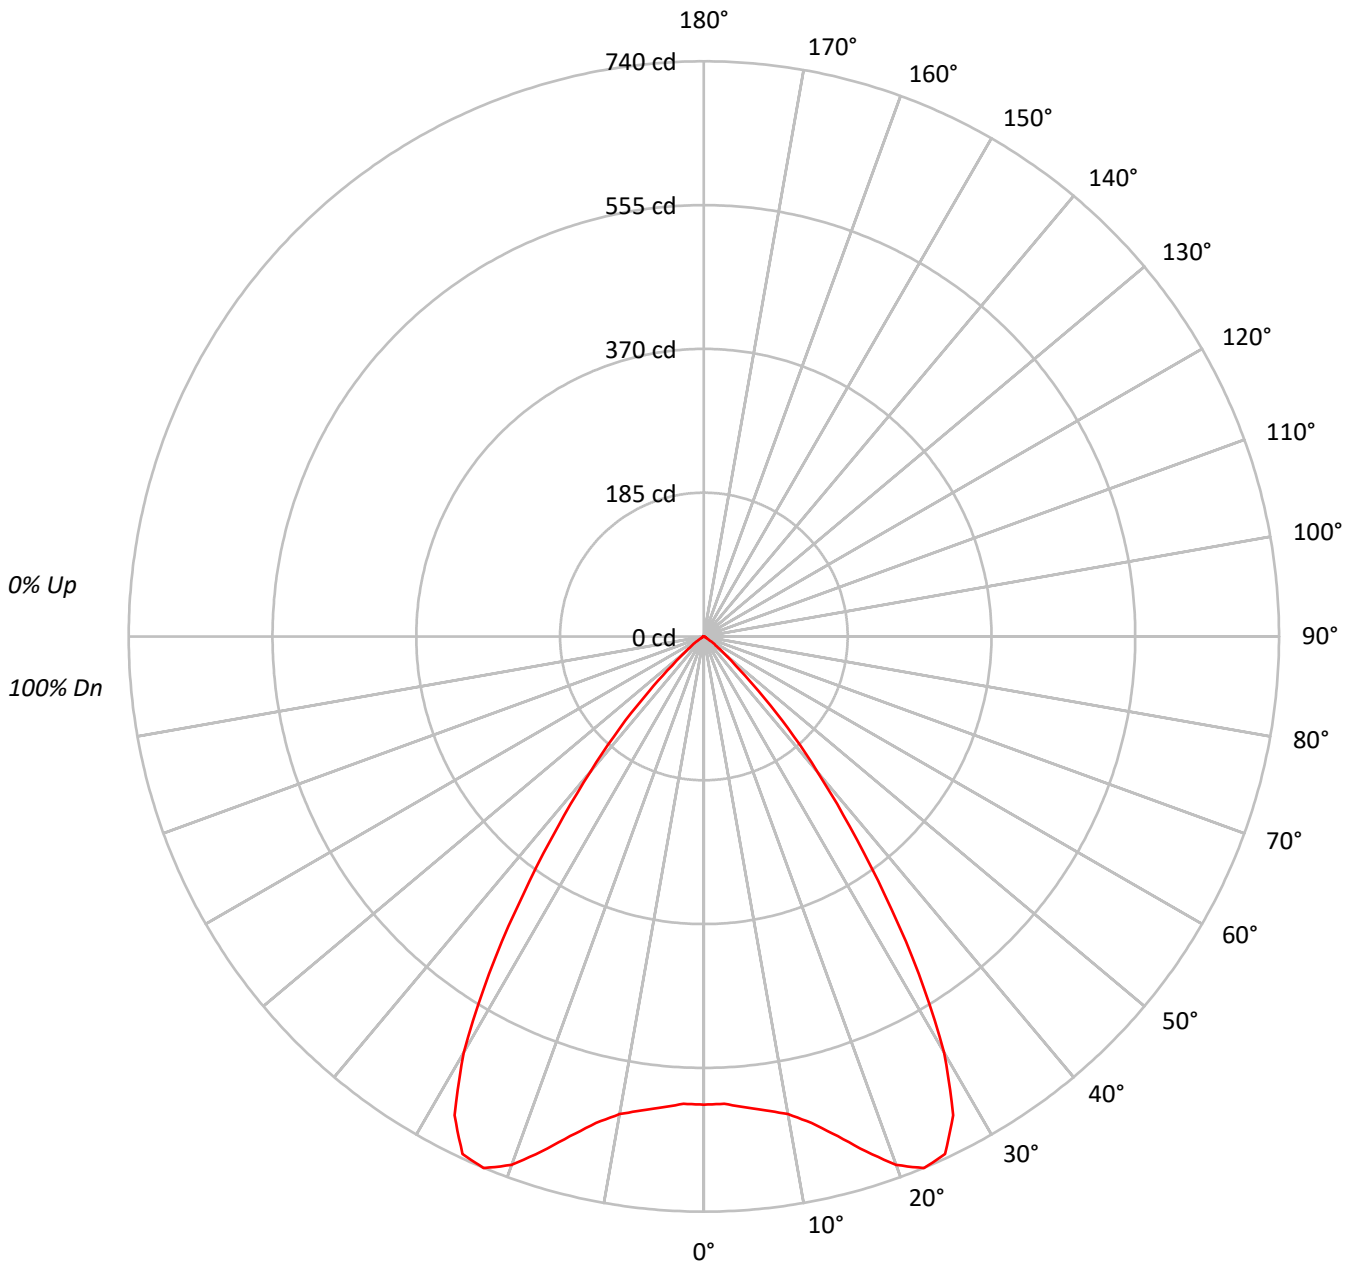



TEST NUMBER: P583415

CATALOG NUMBER: HC607D010-HM60525940-61WDC

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	108	105	111	108	106	103	104	102	100	100	99	97	97	96	94	93	93	93	93
2	107	102	97	94	105	100	96	93	97	94	91	94	91	89	91	89	87	85	85	85	85
3	101	94	89	85	99	93	88	84	90	86	82	88	84	81	85	82	80	78	78	78	78
4	95	87	81	77	93	86	80	76	84	79	75	82	78	74	80	76	74	72	72	72	72
5	90	81	75	70	88	80	74	70	78	73	69	76	72	68	75	71	68	66	66	66	66
6	85	75	69	64	83	74	68	64	73	67	63	71	67	63	70	66	62	61	61	61	61
7	80	70	63	59	79	69	63	59	68	62	58	67	62	58	66	61	58	56	56	56	56
8	76	65	59	54	74	65	59	54	64	58	54	62	57	54	61	57	53	52	52	52	52
9	71	61	55	50	70	60	54	50	60	54	50	59	53	50	58	53	50	48	48	48	48
10	68	57	51	47	67	57	51	47	56	50	46	55	50	46	54	50	46	45	45	45	45

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	33018
5°	33463
10°	34719
15°	37758
20°	42208
25°	44428
30°	39114
35°	27131
40°	16202
45°	7706
50°	2908
55°	1214
60°	384
65°	298
70°	176
75°	127
80°	189
85°	0



TEST NUMBER: P583415

CATALOG NUMBER: HC607D010-HM60525940-61WDC

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	58.5	6.3
10°-20°	191.0	20.5
20°-30°	327.3	35.1
30°-40°	254.2	27.3
40°-50°	84.1	9.0
50°-60°	12.9	1.4
60°-70°	2.2	0.2
70°-80°	0.8	0.1
80°-90°	0.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	576.8	61.9
0°-40°	831.0	89.2
0°-60°	928.0	99.6
0°-90°	931.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	931.3	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	602	
5°	608	59
15°	665	191
25°	734	327
35°	405	254
45°	99	84
55°	13	13
65°	2	2
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P583415

CATALOG NUMBER: HC607D010-HM60525940-61WDC

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	602.3
2.5°	601.7
5°	608.1
7.5°	615.0
10°	623.7
12.5°	640.9
15°	665.3
17.5°	694.6
20°	723.5
22.5°	740.3
25°	734.5
27.5°	694.6
30°	617.9
32.5°	514.5
35°	405.4
37.5°	307.8
40°	226.4
42.5°	160.0
45°	99.4
47.5°	55.4
50°	34.1
52.5°	20.7
55°	12.7
57.5°	6.3
60°	3.5
62.5°	2.8
65°	2.3
67.5°	1.7
70°	1.1
72.5°	1.1
75°	0.6
77.5°	0.6
80°	0.6
82.5°	0.6
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P







— 0°-180°







(END OF REPORT)