

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P583417

Luminaire Tested: **HC607D010-HM60525940-61WDW**

Issue Date: 9/16/2021

Test Information

Test Method: LM-41-14
Report Number: P583417
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2105-241-9)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 9/16/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC607D010-HM60525940-61WDW
Description: HALO COMMERCIAL 6" ROUND, NEW CONSTRUCTION FRAME, WITH 6" WIDE DISTRIBUTION, WHITE TRIM
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 842.9 lumens
Efficiency: N/A
Efficacy: 105.4 lumens/watt
Spacing Criteria (0/90/45): 1.11 / 1.11 / 1.09
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct


Input Watts (W): 8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P583417

CATALOG NUMBER: HC607D010-HM60525940-61WDW

Luminous Intensity Polar Plot

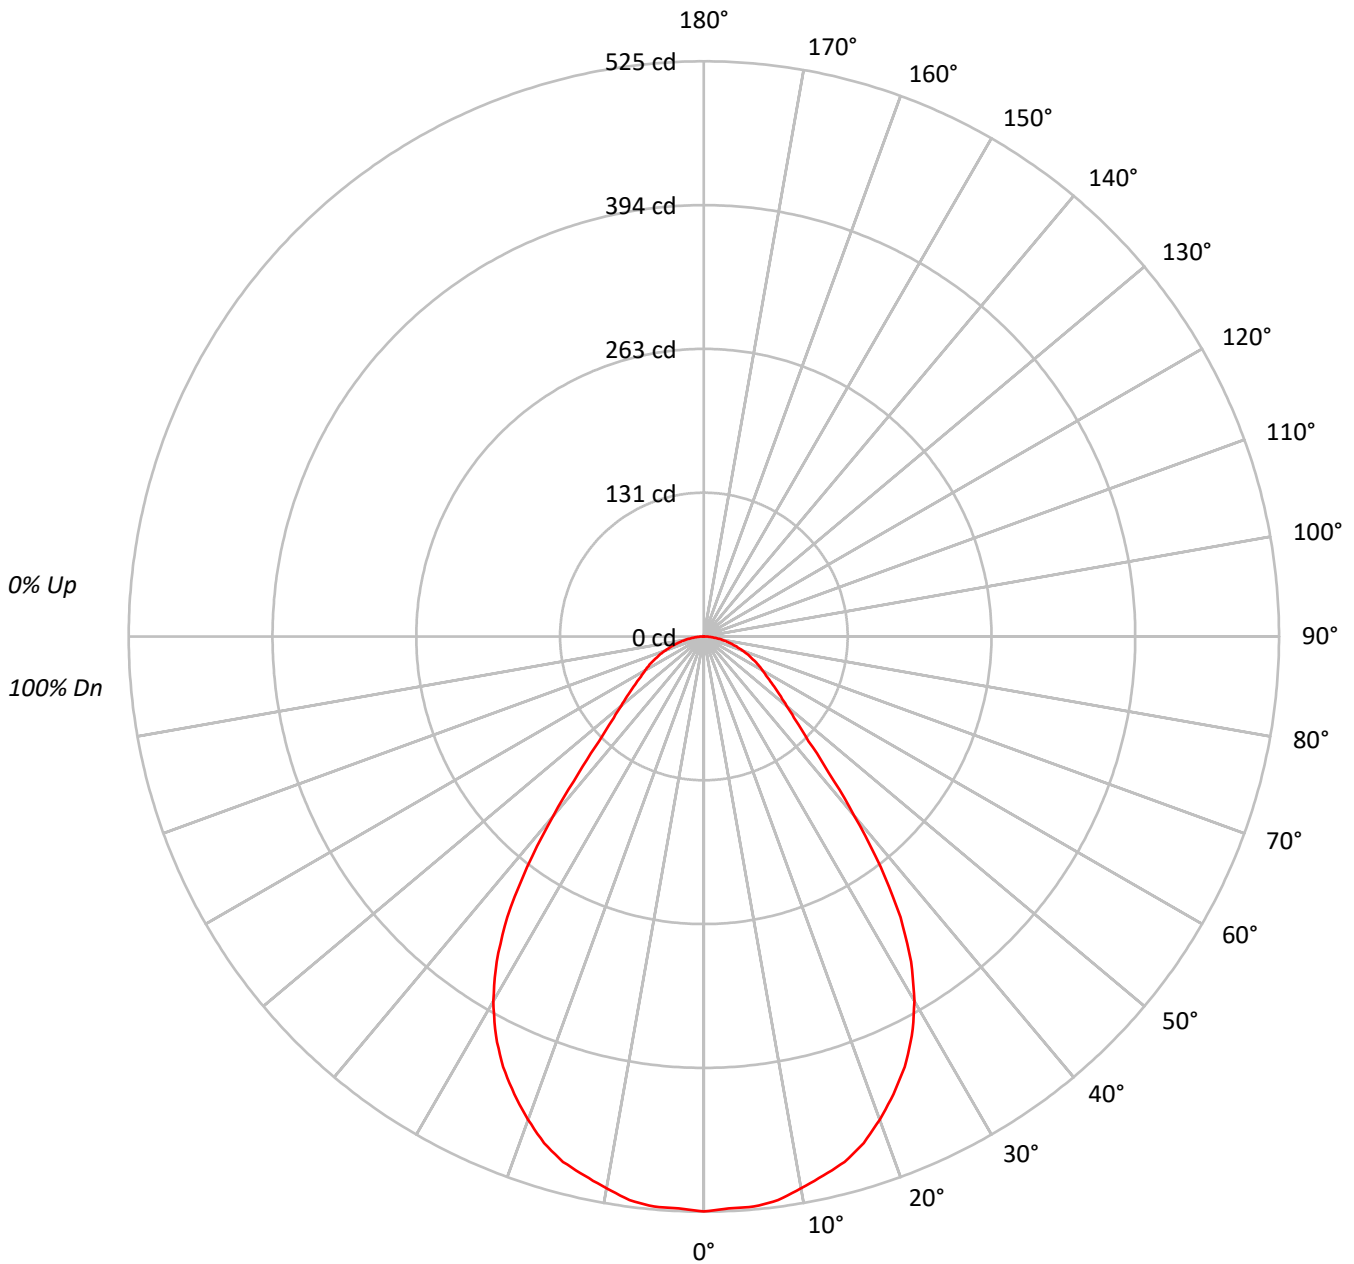



TEST NUMBER: P583417

CATALOG NUMBER: HC607D010-HM60525940-61WDW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	111	107	104	101	108	105	102	99	101	98	96	97	95	93	94	92	90	89			89
2	103	97	91	87	101	95	90	86	91	87	84	88	85	82	85	83	80	78			78
3	96	87	81	76	94	86	80	75	83	78	74	81	76	72	78	74	71	69			69
4	89	80	72	67	87	78	72	66	76	70	66	74	69	65	72	67	64	62			62
5	84	73	65	60	82	72	65	59	70	64	59	68	63	58	66	62	58	56			56
6	78	67	59	54	76	66	59	54	64	58	53	63	57	53	61	56	52	51			51
7	73	62	54	49	72	61	54	49	60	53	48	58	52	48	57	52	48	46			46
8	69	57	50	45	68	57	50	45	55	49	44	54	48	44	53	48	44	42			42
9	65	53	46	41	64	53	46	41	52	45	41	51	45	41	50	44	41	39			39
10	61	50	43	38	60	49	42	38	48	42	38	47	42	38	47	41	38	36			36

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	28770
5°	28747
10°	28468
15°	28178
20°	27378
25°	26227
30°	24333
35°	20940
40°	15286
45°	10474
50°	8418
55°	7340
60°	6765
65°	6434
70°	6011
75°	5613
80°	5114
85°	4340



TEST NUMBER: P583417

CATALOG NUMBER: HC607D010-HM60525940-61WDW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	49.5	5.9
10°-20°	139.4	16.5
20°-30°	198.3	23.5
30°-40°	190.9	22.6
40°-50°	109.9	13.0
50°-60°	69.6	8.3
60°-70°	49.2	5.8
70°-80°	28.1	3.3
80°-90°	8.0	0.9
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	387.3	45.9
0°-40°	578.2	68.6
0°-60°	757.6	89.9
0°-90°	842.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	842.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	525	
5°	522	50
15°	496	139
25°	434	198
35°	313	191
45°	135	110
55°	77	70
65°	50	49
75°	26	28
85°	7	8
90°	0	



TEST NUMBER: P583417

CATALOG NUMBER: HC607D010-HM60525940-61WDW

CANDELA DISTRIBUTION (FULL):

	0°
0°	524.8
2.5°	522.4
5°	522.4
7.5°	519.0
10°	511.4
12.5°	504.0
15°	496.5
17.5°	484.9
20°	469.3
22.5°	452.1
25°	433.6
27.5°	411.1
30°	384.4
32.5°	352.1
35°	312.9
37.5°	265.0
40°	213.6
42.5°	168.6
45°	135.1
47.5°	113.8
50°	98.7
52.5°	86.6
55°	76.8
57.5°	68.1
60°	61.7
62.5°	56.0
65°	49.6
67.5°	43.8
70°	37.5
72.5°	31.7
75°	26.5
77.5°	21.4
80°	16.2
82.5°	11.6
85°	6.9
87.5°	2.8
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)