

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P593043

Luminaire Tested: **HC607D010-HM60525950-61MDW**

Issue Date: 9/16/2021

**Test Information**

Test Method: LM-41-14  
Report Number: P593043  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2105-241-6)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 9/16/2021  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: HALO COMMERCIAL  
Catalog Number: HC607D010-HM60525950-61MDW  
Description: HALO COMMERCIAL 6" ROUND, NEW CONSTRUCTION FRAME, WITH 6" MEDIUM DISTRIBUTION, WHITE TRIM  
Light Source: (1) HIGH LUMEN LED 90CRI / 5000K CCT  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 797.3 lumens  
Efficiency: N/A  
Efficacy: 99.7 lumens/watt  
Spacing Criteria (0/90/45): 1.08 / 1.08 / 1.03  
Luminous Opening: Circular (Dia: 0.5' x H: 0')  
CIE Type: Direct


Input Watts (W): 8  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P593043

CATALOG NUMBER: HC607D010-HM60525950-61MDW

### Luminous Intensity Polar Plot

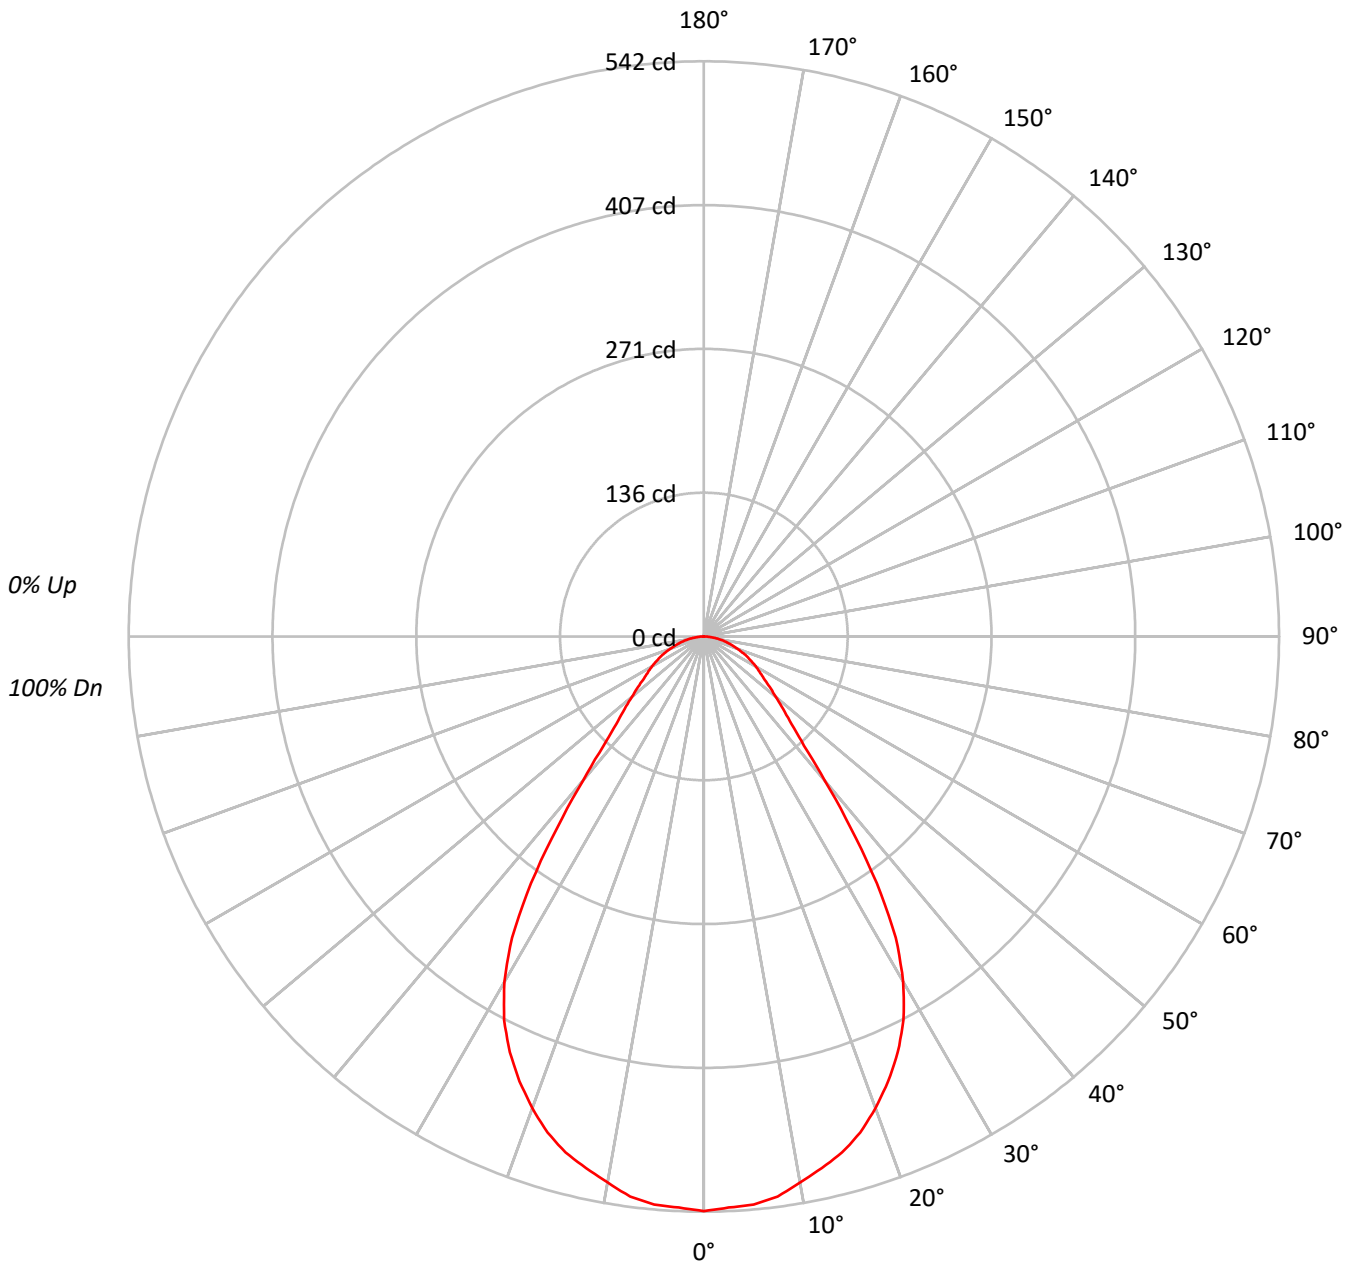



TEST NUMBER: P593043

CATALOG NUMBER: HC607D010-HM60525950-61MDW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	111	108	104	101	109	105	102	100	101	99	96	97	95	94	94	92	91	89			89
2	104	97	92	87	101	95	90	86	92	88	84	89	85	82	86	83	81	79			79
3	97	88	82	76	94	87	81	76	84	79	75	81	77	73	79	75	72	70			70
4	90	80	73	68	88	79	73	67	77	71	67	75	70	66	73	68	65	63			63
5	84	74	66	61	82	73	66	61	71	65	60	69	64	59	67	63	59	57			57
6	79	68	61	55	77	67	60	55	65	59	55	64	58	54	62	58	54	52			52
7	74	63	55	50	73	62	55	50	61	54	50	59	54	50	58	53	49	48			48
8	70	58	51	46	69	58	51	46	57	50	46	55	50	46	54	49	45	44			44
9	66	54	47	43	65	54	47	42	53	47	42	52	46	42	51	46	42	40			40
10	62	51	44	39	61	50	44	39	49	43	39	49	43	39	48	43	39	37			37

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	29685
5°	29573
10°	29080
15°	28570
20°	27582
25°	26155
30°	23788
35°	19006
40°	12681
45°	9040
50°	7539
55°	6566
60°	6195
65°	5837
70°	5369
75°	5020
80°	4546
85°	3963



TEST NUMBER: P593043

CATALOG NUMBER: HC607D010-HM60525950-61MDW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	50.8	6.4
10°-20°	141.3	17.7
20°-30°	197.5	24.8
30°-40°	174.0	21.8
40°-50°	94.0	11.8
50°-60°	62.9	7.9
60°-70°	44.5	5.6
70°-80°	25.0	3.1
80°-90°	7.3	0.9
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	389.7	48.9
0°-40°	563.6	70.7
0°-60°	720.5	90.4
0°-90°	797.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	797.3	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	542	
5°	537	51
15°	503	141
25°	432	198
35°	284	174
45°	117	94
55°	69	63
65°	45	45
75°	24	25
85°	6	7
90°	0	



TEST NUMBER: P593043

CATALOG NUMBER: HC607D010-HM60525950-61MDW

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	541.5
2.5°	538.6
5°	537.4
7.5°	532.3
10°	522.4
12.5°	513.1
15°	503.4
17.5°	490.1
20°	472.8
22.5°	453.8
25°	432.4
27.5°	407.5
30°	375.8
32.5°	336.5
35°	284.0
37.5°	226.8
40°	177.2
42.5°	139.7
45°	116.6
47.5°	101.1
50°	88.4
52.5°	78.0
55°	68.7
57.5°	62.3
60°	56.5
62.5°	50.8
65°	45.0
67.5°	39.2
70°	33.5
72.5°	28.3
75°	23.7
77.5°	19.0
80°	14.4
82.5°	10.4
85°	6.3
87.5°	2.8
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P







— 0°-180°







(END OF REPORT)