

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P583837

Luminaire Tested: **HC815D010-HM80520827-81PSMDW**

Issue Date: 10/21/2021

Test Information

Test Method: LM-41-14
Report Number: P583837
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2109-368-12)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 10/21/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC815D010-HM80520827-81PSMDW
Description: HALO COMMERCIAL 8" ROUND, NEW CONSTRUCTION FRAME, WITH 8" PLASTIC TRIM
Light Source: (1) HIGH LUMEN LED 80CRI / 2700K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1589.7 lumens
Efficiency: N/A
Efficacy: 113.5 lumens/watt
Spacing Criteria (0/90/45): 1.06 / 1.06 / 0.97
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct


Input Watts (W): 14
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P583837

CATALOG NUMBER: HC815D010-HM80520827-81PSMDW

Luminous Intensity Polar Plot

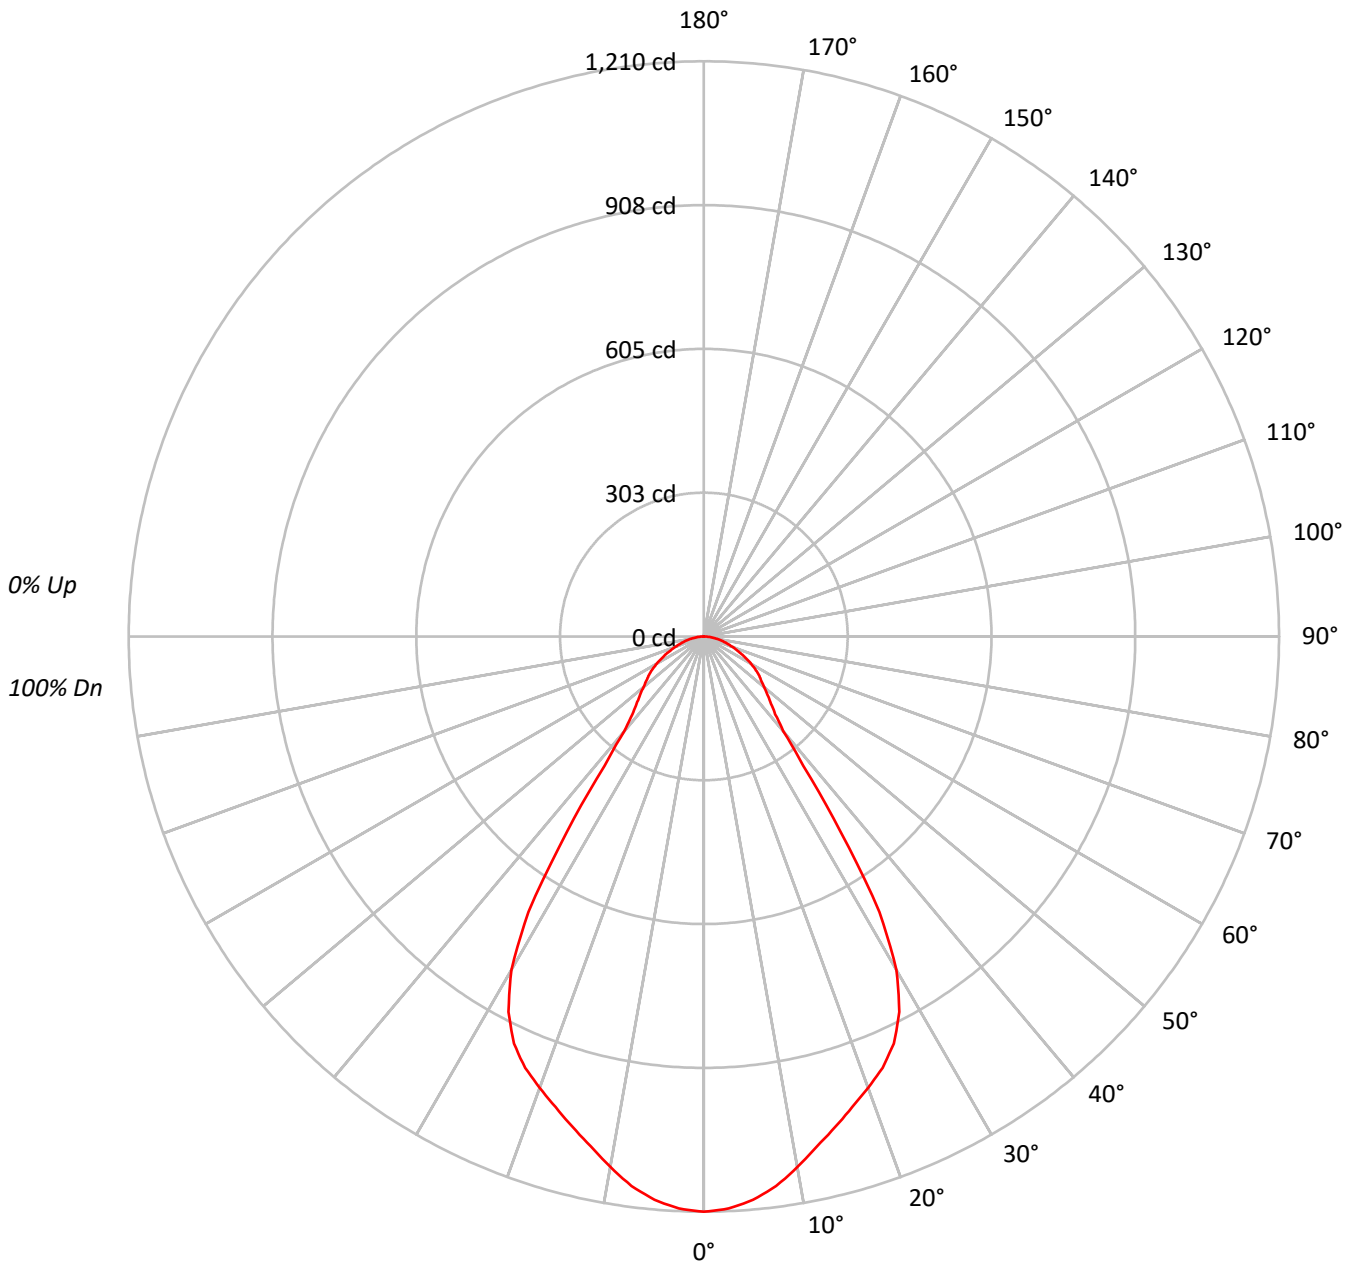



TEST NUMBER: P583837

CATALOG NUMBER: HC815D010-HM80520827-81PSMDW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	111	108	105	102	109	106	103	100	101	99	97	98	96	94	94	93	91	89	89	89	89
2	104	98	92	88	102	96	91	87	92	88	85	89	86	83	86	84	81	79	79	79	79
3	97	89	83	77	95	87	82	77	85	80	76	82	78	74	80	76	73	71	71	71	71
4	91	81	74	69	89	80	74	69	78	72	68	76	71	67	74	70	66	64	64	64	64
5	85	75	68	62	83	74	67	62	72	66	61	70	65	61	68	64	60	58	58	58	58
6	80	69	62	57	78	68	61	56	67	61	56	65	60	56	64	59	55	53	53	53	53
7	75	64	57	52	74	63	57	52	62	56	51	61	55	51	60	55	51	49	49	49	49
8	71	60	53	48	70	59	52	48	58	52	47	57	51	47	56	51	47	45	45	45	45
9	67	56	49	44	66	55	49	44	54	48	44	53	48	44	52	47	44	42	42	42	42
10	64	52	46	41	62	52	45	41	51	45	41	50	45	41	49	44	41	39	39	39	39

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	37315
5°	36826
10°	35480
15°	34092
20°	33150
25°	32153
30°	28849
35°	18912
40°	10458
45°	8717
50°	7949
55°	7586
60°	7055
65°	6392
70°	5779
75°	5230
80°	4759
85°	4529



TEST NUMBER: P583837

CATALOG NUMBER: HC815D010-HM80520827-81PSMDW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	111.8	7.0
10°-20°	301.3	19.0
20°-30°	428.8	27.0
30°-40°	317.3	20.0
40°-50°	157.2	9.9
50°-60°	125.5	7.9
60°-70°	87.1	5.5
70°-80°	47.0	3.0
80°-90°	13.8	0.9
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	841.8	53.0
0°-40°	1159.2	72.9
0°-60°	1441.8	90.7
0°-90°	1589.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1589.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1210	
5°	1190	112
15°	1068	301
25°	945	429
35°	502	317
45°	200	157
55°	141	125
65°	88	87
75°	44	47
85°	13	14
90°	0	



TEST NUMBER: P583837

CATALOG NUMBER: HC815D010-HM80520827-81PSMDW

CANDELA DISTRIBUTION (FULL):

0°	
0°	1210.1
2.5°	1204.6
5°	1189.7
7.5°	1166.2
10°	1133.1
12.5°	1098.8
15°	1067.9
17.5°	1038.0
20°	1010.2
22.5°	982.3
25°	945.0
27.5°	890.4
30°	810.2
32.5°	687.3
35°	502.4
37.5°	343.2
40°	259.8
42.5°	222.3
45°	199.9
47.5°	181.7
50°	165.7
52.5°	151.8
55°	141.1
57.5°	128.3
60°	114.4
62.5°	100.5
65°	87.6
67.5°	74.8
70°	64.1
72.5°	53.5
75°	43.9
77.5°	35.3
80°	26.8
82.5°	19.3
85°	12.8
87.5°	5.3
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)