

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P583857

Luminaire Tested: **HC815D010-HM80520830-81WDBB**

Issue Date: 10/21/2021

Test Information

Test Method: LM-41-14
Report Number: P583857
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2109-368-11)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 10/21/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC815D010-HM80520830-81WDBB
Description: HALO COMMERCIAL 8" ROUND, NEW CONSTRUCTION FRAME, WITH 8" WIDE DISTRIBUTION, BLACK BAFFLE TRIM
Light Source: (1) HIGH LUMEN LED 80CRI / 3000K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1592.8 lumens
Efficiency: N/A
Efficacy: 113.8 lumens/watt
Spacing Criteria (0/90/45): 1.32 / 1.32 / 1.13
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct


Input Watts (W): 14
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P583857

CATALOG NUMBER: HC815D010-HM80520830-81WDBB

Luminous Intensity Polar Plot

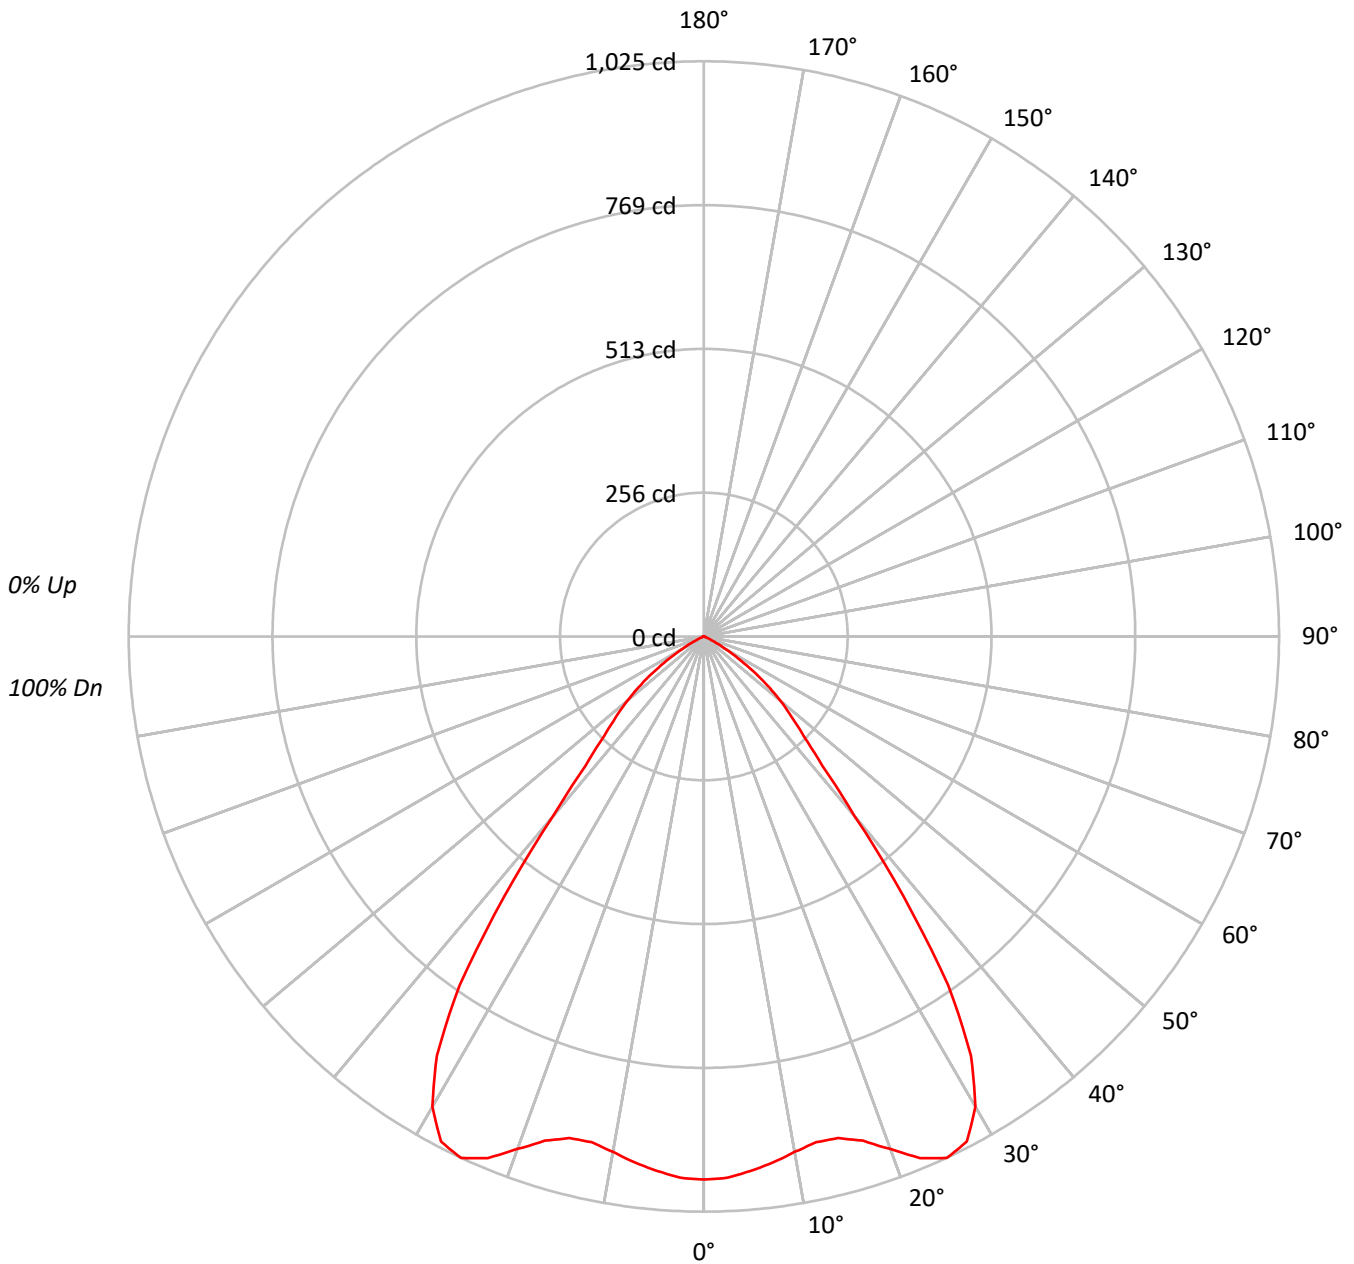



TEST NUMBER: P583857

CATALOG NUMBER: HC815D010-HM80520830-81WDBB

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	109	107	104	110	107	105	102	103	101	99	99	98	96	96	95	93	92			
2	106	100	95	92	104	98	94	91	95	92	89	92	89	87	89	87	85	83			
3	99	92	86	81	97	90	85	81	88	83	79	85	81	78	83	80	77	75			
4	93	84	78	73	91	83	77	72	81	76	71	79	74	71	77	73	70	68			
5	87	77	71	66	85	76	70	65	74	69	65	73	68	64	71	67	63	62			
6	82	71	64	59	80	70	64	59	69	63	59	67	62	58	66	61	58	56			
7	77	66	59	54	75	65	59	54	64	58	54	63	57	53	61	57	53	51			
8	72	61	54	49	71	61	54	49	59	53	49	58	53	49	57	52	49	47			
9	68	57	50	45	67	56	50	45	55	49	45	54	49	45	53	48	45	43			
10	64	53	46	42	63	53	46	42	52	46	42	51	45	41	50	45	41	40			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	29840
5°	29592
10°	29205
15°	29536
20°	31896
25°	34882
30°	34457
35°	28583
40°	16822
45°	10994
50°	8520
55°	5661
60°	2757
65°	854
70°	279
75°	262
80°	195
85°	389



TEST NUMBER: P583857

CATALOG NUMBER: HC815D010-HM80520830-81WDBB

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	90.5	5.7
10°-20°	265.8	16.7
20°-30°	464.7	29.2
30°-40°	452.1	28.4
40°-50°	205.6	12.9
50°-60°	95.3	6.0
60°-70°	16.0	1.0
70°-80°	2.0	0.1
80°-90°	0.7	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	821.1	51.5
0°-40°	1273.1	79.9
0°-60°	1574.1	98.8
0°-90°	1592.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1592.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	968	
5°	956	91
15°	925	266
25°	1025	465
35°	759	452
45°	252	206
55°	105	95
65°	12	16
75°	2	2
85°	1	1
90°	0	



TEST NUMBER: P583857

CATALOG NUMBER: HC815D010-HM80520830-81WDBB

CANDELA DISTRIBUTION (FULL):

	0°
0°	967.7
2.5°	965.6
5°	956.0
7.5°	945.4
10°	932.7
12.5°	923.0
15°	925.2
17.5°	942.2
20°	972.0
22.5°	1006.1
25°	1025.2
27.5°	1014.5
30°	967.7
32.5°	885.8
35°	759.3
37.5°	584.9
40°	417.9
42.5°	311.6
45°	252.1
47.5°	212.7
50°	177.6
52.5°	141.5
55°	105.3
57.5°	72.3
60°	44.7
62.5°	24.5
65°	11.7
67.5°	5.3
70°	3.1
72.5°	2.2
75°	2.2
77.5°	1.1
80°	1.1
82.5°	1.1
85°	1.1
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)