

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P583866

Luminaire Tested: **HC815D010-HM80520835-81MDH**

Issue Date: 10/21/2021

Test Information

Test Method: LM-41-14
Report Number: P583866
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2109-368-5)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 10/21/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC815D010-HM80520835-81MDH
Description: HALO COMMERCIAL 8" ROUND, NEW CONSTRUCTION FRAME, WITH 8" MEDIUM DISTRIBUTION, HAZE TRIM
Light Source: (1) HIGH LUMEN LED 80CRI / 3500K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1633.7 lumens
Efficiency: N/A
Efficacy: 116.7 lumens/watt
Spacing Criteria (0/90/45): 0.68 / 0.68 / 0.81
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct


Input Watts (W): 14
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P583866

CATALOG NUMBER: HC815D010-HM80520835-81MDH

Luminous Intensity Polar Plot

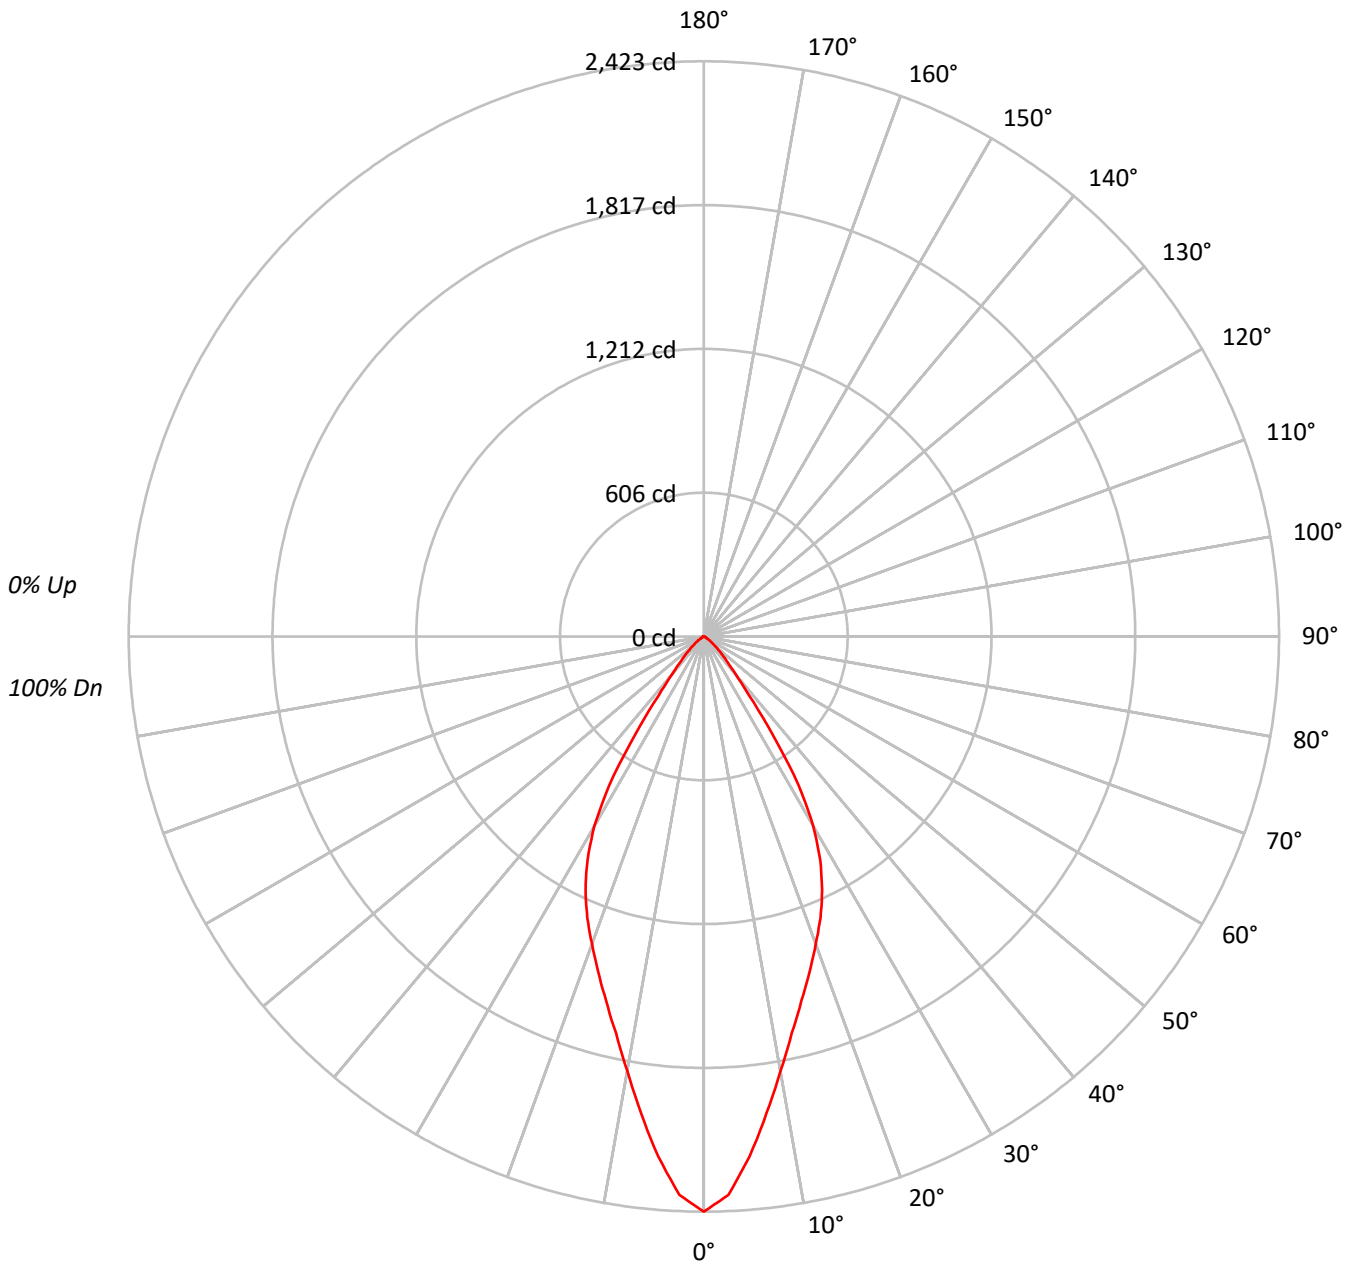



TEST NUMBER: P583866

CATALOG NUMBER: HC815D010-HM80520835-81MDH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	114	111	108	106	111	109	106	104	105	103	101	101	99	98	97	96	95	94			
2	108	103	99	96	106	101	98	95	98	95	93	95	93	91	92	90	89	87			
3	103	96	91	87	101	95	90	87	92	88	85	90	87	84	88	85	83	81			
4	97	90	85	80	96	89	84	80	87	82	79	85	81	78	83	80	77	76			
5	93	84	79	74	91	83	78	74	82	77	73	80	76	73	78	75	72	71			
6	88	79	73	69	87	78	73	69	77	72	68	76	71	68	74	70	67	66			
7	84	75	69	64	82	74	68	64	73	68	64	71	67	64	70	66	63	62			
8	80	70	64	60	79	70	64	60	69	64	60	68	63	60	67	63	60	58			
9	76	67	61	57	75	66	61	57	65	60	56	64	60	56	63	59	56	55			
10	73	63	57	54	72	63	57	53	62	57	53	61	56	53	60	56	53	52			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	74713
5°	68084
10°	58175
15°	50727
20°	45216
25°	40111
30°	32840
35°	18856
40°	8369
45°	4871
50°	2811
55°	1607
60°	882
65°	562
70°	406
75°	262
80°	195
85°	389



TEST NUMBER: P583866

CATALOG NUMBER: HC815D010-HM80520835-81MDH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	199.1	12.2
10°-20°	446.7	27.3
20°-30°	534.7	32.7
30°-40°	323.5	19.8
40°-50°	90.6	5.5
50°-60°	28.2	1.7
60°-70°	8.0	0.5
70°-80°	2.2	0.1
80°-90°	0.7	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1180.5	72.3
0°-40°	1503.9	92.1
0°-60°	1622.7	99.3
0°-90°	1633.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1633.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2423	
5°	2200	199
15°	1589	447
25°	1179	535
35°	501	323
45°	112	91
55°	30	28
65°	8	8
75°	2	2
85°	1	1
90°	0	



TEST NUMBER: P583866

CATALOG NUMBER: HC815D010-HM80520835-81MDH

CANDELA DISTRIBUTION (FULL):

	0°
0°	2422.9
2.5°	2354.3
5°	2199.5
7.5°	2024.8
10°	1857.9
12.5°	1711.8
15°	1589.0
17.5°	1480.7
20°	1377.9
22.5°	1282.7
25°	1178.9
27.5°	1061.6
30°	922.3
32.5°	742.0
35°	500.9
37.5°	311.9
40°	207.9
42.5°	149.3
45°	111.7
47.5°	81.8
50°	58.6
52.5°	41.0
55°	29.9
57.5°	19.9
60°	14.3
62.5°	10.0
65°	7.7
67.5°	5.5
70°	4.5
72.5°	2.2
75°	2.2
77.5°	1.1
80°	1.1
82.5°	1.1
85°	1.1
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)