

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P583871

Luminaire Tested: **HC815D010-HM80520835-81PSMDW**

Issue Date: 10/21/2021

Test Information

Test Method: LM-41-14
Report Number: P583871
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2109-368-12)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 10/21/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC815D010-HM80520835-81PSMDW
Description: HALO COMMERCIAL 8" ROUND, NEW CONSTRUCTION FRAME, WITH 8" PLASTIC TRIM
Light Source: (1) HIGH LUMEN LED 80CRI / 3500K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1644.7 lumens
Efficiency: N/A
Efficacy: 117.5 lumens/watt
Spacing Criteria (0/90/45): 1.06 / 1.06 / 0.97
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct


Input Watts (W): 14
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P583871

CATALOG NUMBER: HC815D010-HM80520835-81PSMDW

Luminous Intensity Polar Plot

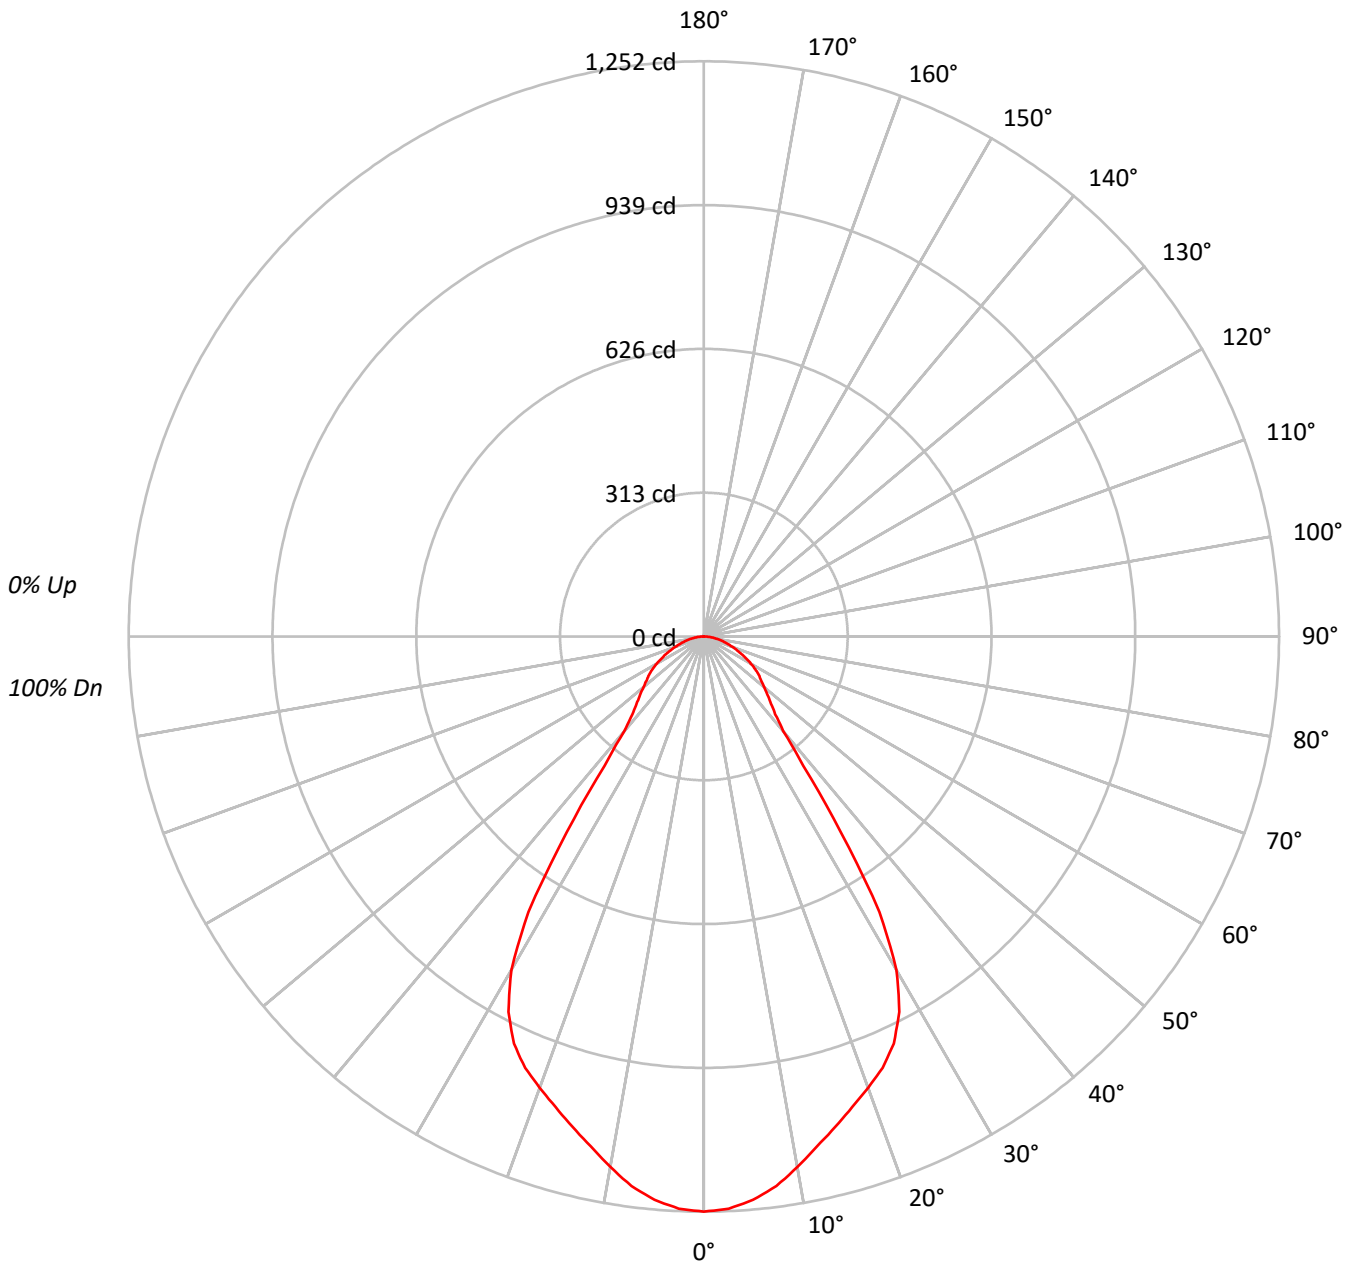



TEST NUMBER: P583871

CATALOG NUMBER: HC815D010-HM80520835-81PSMDW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	111	108	105	102	109	106	103	100	101	99	97	98	96	94	94	93	91	89	89	89	89
2	104	98	92	88	102	96	91	87	92	88	85	89	86	83	86	84	81	79	79	79	79
3	97	89	83	77	95	87	82	77	85	80	76	82	78	74	80	76	73	71	71	71	71
4	91	81	74	69	89	80	74	69	78	72	68	76	71	67	74	70	66	64	64	64	64
5	85	75	68	62	83	74	67	62	72	66	61	70	65	61	68	64	60	58	58	58	58
6	80	69	62	57	78	68	61	56	67	61	56	65	60	56	64	59	55	53	53	53	53
7	75	64	57	52	74	63	57	52	62	56	51	61	55	51	60	55	51	49	49	49	49
8	71	60	53	48	70	59	52	48	58	52	47	57	51	47	56	51	47	45	45	45	45
9	67	56	49	44	66	55	49	44	54	48	44	53	48	44	52	47	44	42	42	42	42
10	64	52	46	41	62	52	45	41	51	45	41	50	45	41	49	44	41	39	39	39	39

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	38607
5°	38105
10°	36707
15°	35273
20°	34299
25°	33265
30°	29849
35°	19567
40°	10816
45°	9018
50°	8227
55°	7849
60°	7296
65°	6618
70°	5987
75°	5397
80°	4901
85°	4706



TEST NUMBER: P583871

CATALOG NUMBER: HC815D010-HM80520835-81PSMDW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	115.7	7.0
10°-20°	311.7	19.0
20°-30°	443.6	27.0
30°-40°	328.3	20.0
40°-50°	162.6	9.9
50°-60°	129.8	7.9
60°-70°	90.1	5.5
70°-80°	48.5	3.0
80°-90°	14.3	0.9
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	871.0	53.0
0°-40°	1199.3	72.9
0°-60°	1491.7	90.7
0°-90°	1644.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1644.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1252	
5°	1231	116
15°	1105	312
25°	978	444
35°	520	328
45°	207	163
55°	146	130
65°	91	90
75°	45	49
85°	13	14
90°	0	



TEST NUMBER: P583871

CATALOG NUMBER: HC815D010-HM80520835-81PSMDW

CANDELA DISTRIBUTION (FULL):

	0°
0°	1252.0
2.5°	1246.5
5°	1231.0
7.5°	1206.7
10°	1172.3
12.5°	1137.0
15°	1104.9
17.5°	1073.9
20°	1045.2
22.5°	1016.4
25°	977.7
27.5°	921.3
30°	838.3
32.5°	711.2
35°	519.8
37.5°	355.0
40°	268.7
42.5°	230.0
45°	206.8
47.5°	188.0
50°	171.5
52.5°	157.0
55°	146.0
57.5°	132.7
60°	118.3
62.5°	104.0
65°	90.7
67.5°	77.5
70°	66.4
72.5°	55.3
75°	45.3
77.5°	36.5
80°	27.6
82.5°	19.9
85°	13.3
87.5°	5.5
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)