

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P583886

Luminaire Tested: **HC815D010-HM80520840-81NDH**

Issue Date: 10/21/2021

Test Information

Test Method: LM-41-14
Report Number: P583886
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2109-368-2)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 10/21/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC815D010-HM80520840-81NDH
Description: HALO COMMERCIAL 8" ROUND, NEW CONSTRUCTION FRAME, WITH 8" NARROW DISTRIBUTION, HAZE TRIM
Light Source: (1) HIGH LUMEN LED 80CRI / 4000K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1609.1 lumens
Efficiency: N/A
Efficacy: 114.9 lumens/watt
Spacing Criteria (0/90/45): 0.42 / 0.42 / 0.57
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct


Input Watts (W): 14
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P583886

CATALOG NUMBER: HC815D010-HM80520840-81NDH

Luminous Intensity Polar Plot

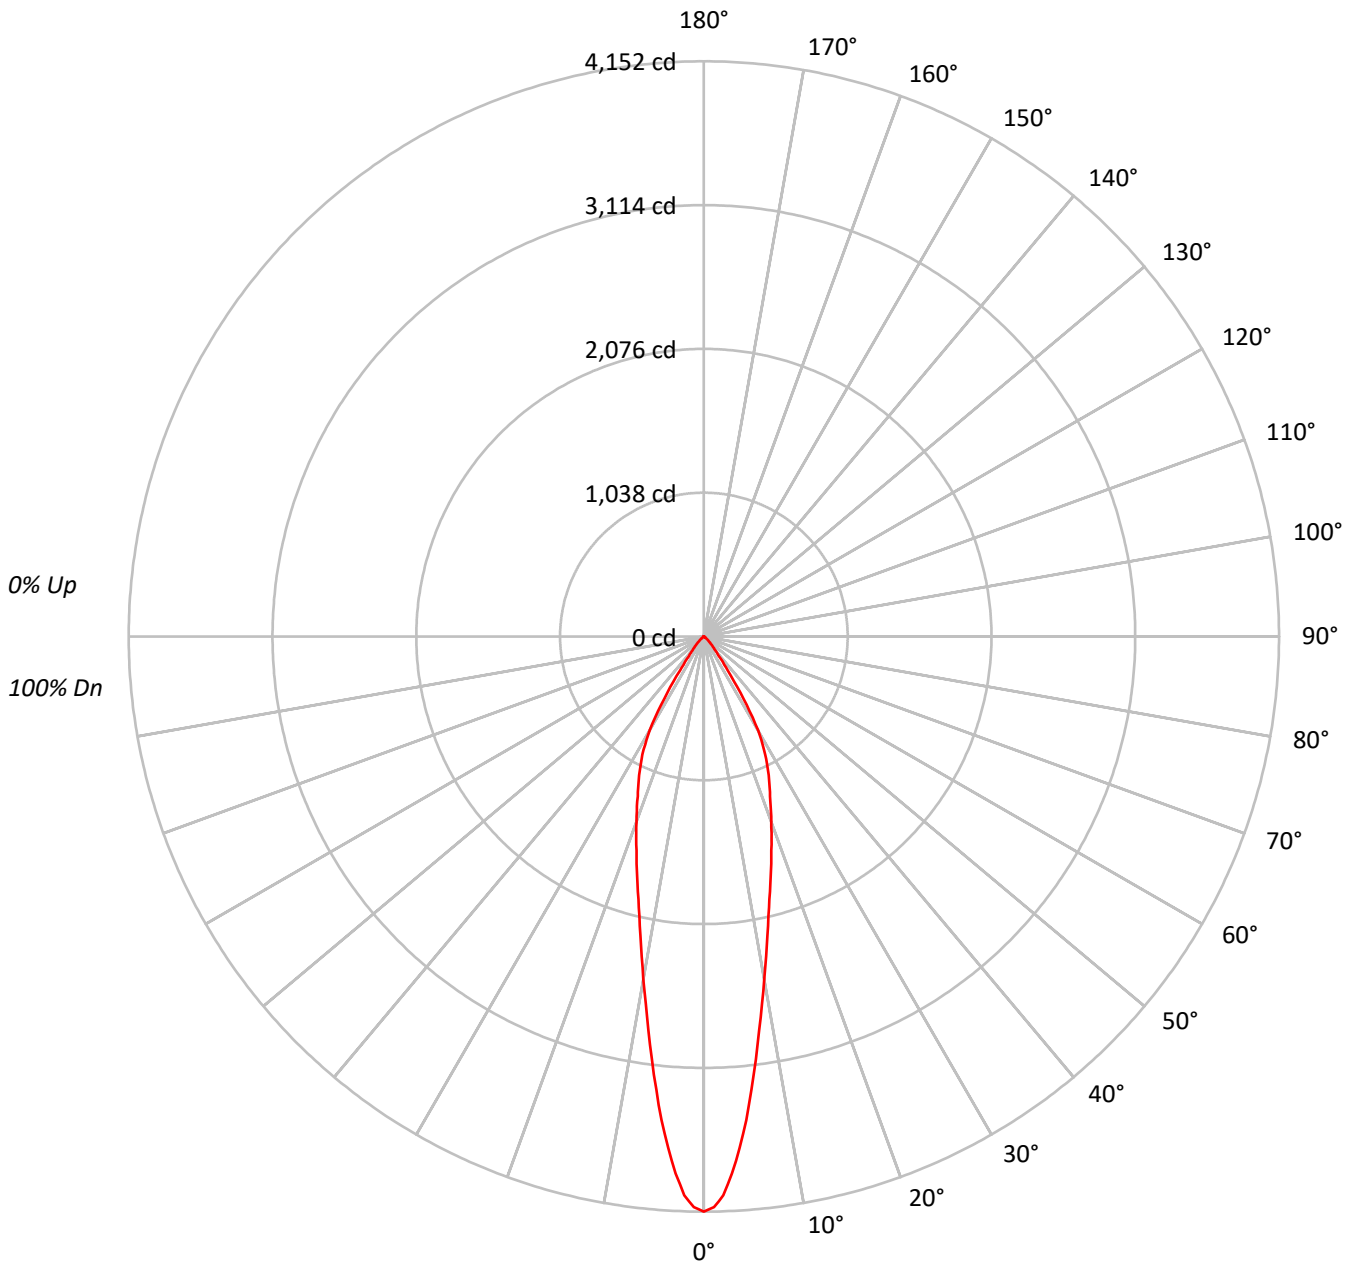



TEST NUMBER: P583886

CATALOG NUMBER: HC815D010-HM80520840-81NDH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10		0		
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	114	112	109	107	112	109	107	106	105	104	102	102	100	99	98	97	96	95			
2	109	105	101	98	107	103	100	97	100	97	95	97	95	93	94	92	91	89			
3	104	99	94	91	102	97	93	90	95	91	88	92	90	87	90	88	86	84			
4	100	93	88	84	98	92	87	84	90	86	83	88	85	82	86	83	81	80			
5	96	88	83	79	94	87	82	79	86	81	78	84	80	77	82	79	77	75			
6	92	84	78	75	90	83	78	74	81	77	74	80	76	73	79	76	73	72			
7	88	80	74	70	87	79	74	70	78	73	70	77	73	70	76	72	69	68			
8	84	76	71	67	83	75	70	67	74	70	66	73	69	66	72	69	66	65			
9	81	72	67	64	80	72	67	63	71	66	63	70	66	63	69	66	63	62			
10	78	69	64	61	77	69	64	61	68	63	60	67	63	60	67	63	60	59			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	128029
5°	108472
10°	78700
15°	59104
20°	46634
25°	37614
30°	27876
35°	11293
40°	4762
45°	2555
50°	1147
55°	575
60°	370
65°	263
70°	216
75°	143
80°	213
85°	425



TEST NUMBER: P583886

CATALOG NUMBER: HC815D010-HM80520840-81NDH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	300.9	18.7
10°-20°	520.0	32.3
20°-30°	502.7	31.2
30°-40°	220.8	13.7
40°-50°	47.7	3.0
50°-60°	10.7	0.7
60°-70°	3.7	0.2
70°-80°	1.4	0.1
80°-90°	1.1	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1323.6	82.3
0°-40°	1544.4	96.0
0°-60°	1602.8	99.6
0°-90°	1609.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1609.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4152	
5°	3504	301
15°	1851	520
25°	1106	503
35°	300	221
45°	59	48
55°	11	11
65°	4	4
75°	1	1
85°	1	1
90°	0	



TEST NUMBER: P583886

CATALOG NUMBER: HC815D010-HM80520840-81NDH

CANDELA DISTRIBUTION (FULL):

	0°
0°	4151.9
1°	4120.9
2°	4036.0
3°	3883.1
4°	3700.2
5°	3504.3
6°	3290.3
7°	3075.2
8°	2873.2
9°	2685.6
10°	2513.4
11°	2350.8
12°	2205.0
13°	2072.4
14°	1955.2
15°	1851.4
17.5°	1618.2
20°	1421.1
22.5°	1247.8
25°	1105.5
27.5°	960.9
30°	782.9
32.5°	531.9
35°	300.0
37.5°	176.9
40°	118.3
42.5°	83.6
45°	58.6
47.5°	38.2
50°	23.9
52.5°	14.3
55°	10.7
57.5°	8.3
60°	6.0
62.5°	4.8
65°	3.6
67.5°	2.4
70°	2.4
72.5°	1.2
75°	1.2
77.5°	1.2
80°	1.2
82.5°	1.2



TEST NUMBER: P583886

CATALOG NUMBER: HC815D010-HM80520840-81NDH

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







85°	1.2
87.5°	1.2



(END OF REPORT)