

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P583908

Luminaire Tested: **HC815D010-HM80520927-81WDBB**

Issue Date: 10/21/2021

Test Information

Test Method: LM-41-14
Report Number: P583908
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2109-368-11)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 10/21/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC815D010-HM80520927-81WDBB
Description: HALO COMMERCIAL 8" ROUND, NEW CONSTRUCTION FRAME, WITH 8" WIDE DISTRIBUTION, BLACK BAFFLE TRIM
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1300.1 lumens
Efficiency: N/A
Efficacy: 92.9 lumens/watt
Spacing Criteria (0/90/45): 1.32 / 1.32 / 1.13
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct


Input Watts (W): 14
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P583908

CATALOG NUMBER: HC815D010-HM80520927-81WDBB

Luminous Intensity Polar Plot

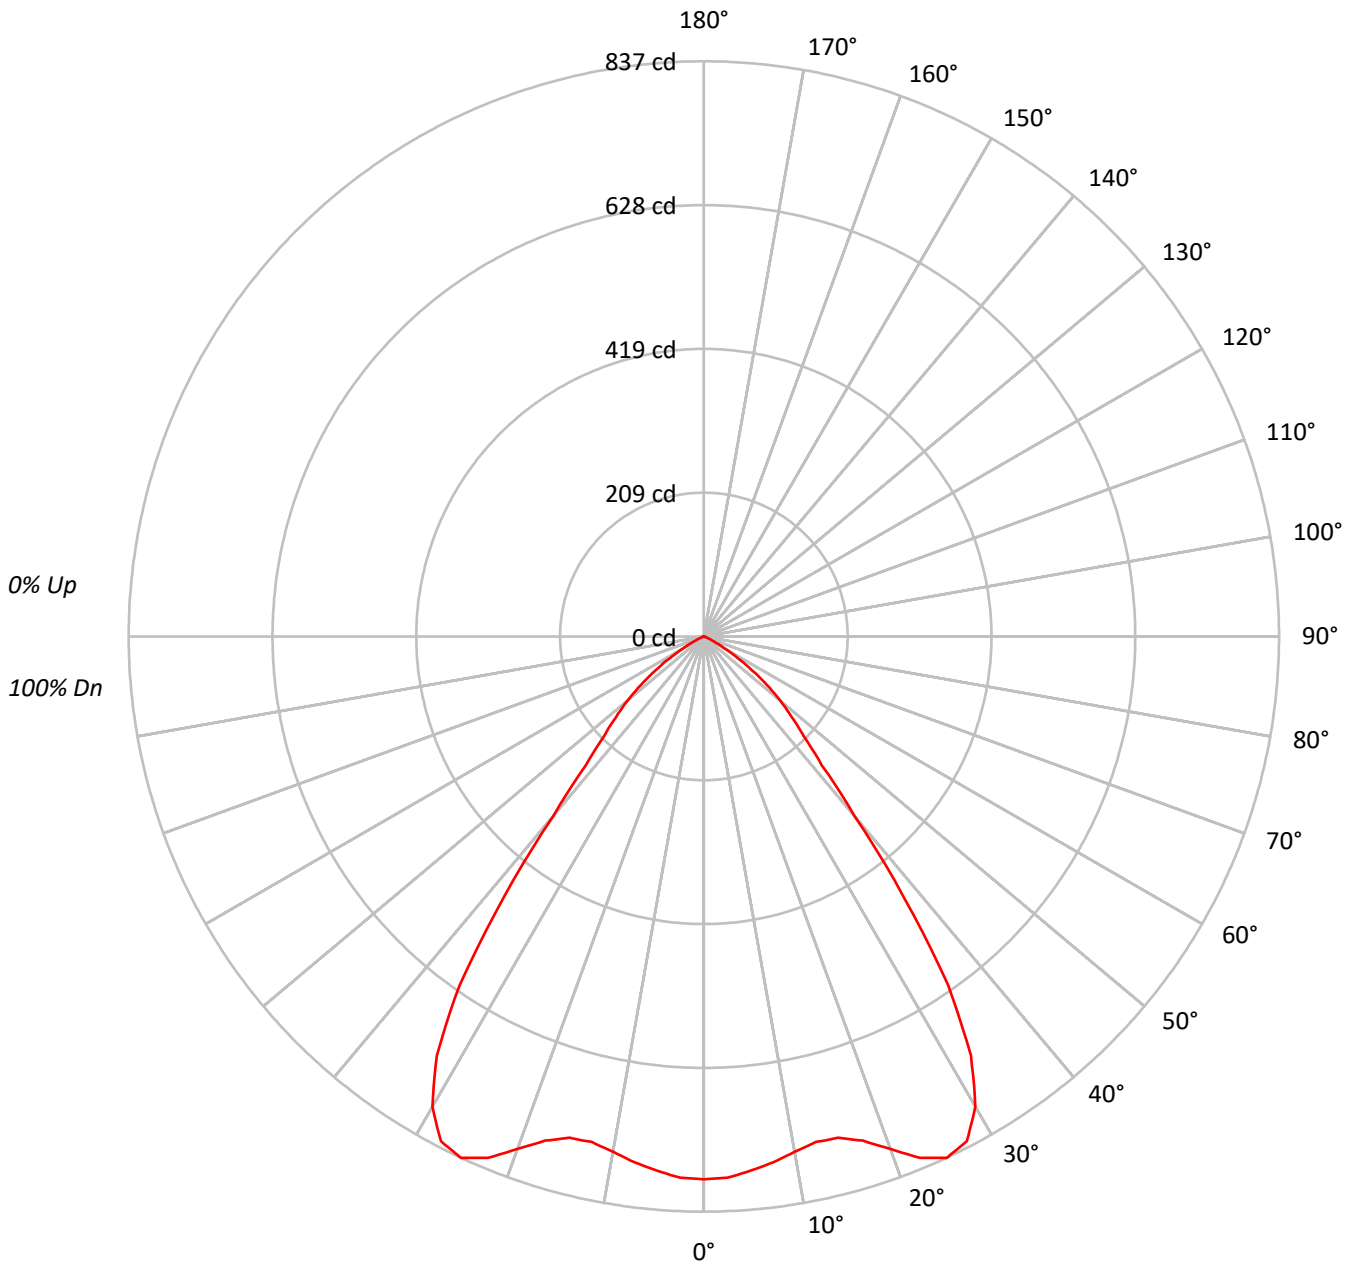



TEST NUMBER: P583908

CATALOG NUMBER: HC815D010-HM80520927-81WDBB

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	109	107	104	110	107	105	102	103	101	99	99	98	96	96	95	93	92			
2	106	100	95	92	104	98	94	91	95	92	89	92	89	87	89	87	85	83			
3	99	92	86	81	97	90	85	81	88	83	79	85	81	78	83	80	77	75			
4	93	84	78	73	91	83	77	72	81	76	71	79	74	71	77	73	70	68			
5	87	77	71	66	85	76	70	65	74	69	65	73	68	64	71	67	63	62			
6	82	71	64	59	80	70	64	59	69	63	59	67	62	58	66	61	58	56			
7	77	66	59	54	75	65	59	54	64	58	54	63	57	53	61	57	53	51			
8	72	61	54	49	71	61	54	49	59	53	49	58	53	49	57	52	49	47			
9	68	57	50	45	67	56	50	45	55	49	45	54	49	45	53	48	45	43			
10	64	53	46	42	63	53	46	42	52	46	42	51	45	42	50	45	41	40			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	24361
5°	24160
10°	23838
15°	24112
20°	26039
25°	28475
30°	28129
35°	23336
40°	13731
45°	8970
50°	6956
55°	4618
60°	2251
65°	693
70°	243
75°	203
80°	142
85°	283



TEST NUMBER: P583908

CATALOG NUMBER: HC815D010-HM80520927-81WDBB

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	73.9	5.7
10°-20°	217.0	16.7
20°-30°	379.4	29.2
30°-40°	369.0	28.4
40°-50°	167.8	12.9
50°-60°	77.8	6.0
60°-70°	13.0	1.0
70°-80°	1.6	0.1
80°-90°	0.5	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	670.3	51.6
0°-40°	1039.3	79.9
0°-60°	1284.9	98.8
0°-90°	1300.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1300.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	790	
5°	780	74
15°	755	217
25°	837	379
35°	620	369
45°	206	168
55°	86	78
65°	10	13
75°	2	2
85°	1	1
90°	0	



TEST NUMBER: P583908

CATALOG NUMBER: HC815D010-HM80520927-81WDBB

CANDELA DISTRIBUTION (FULL):

	0°
0°	790.0
2.5°	788.3
5°	780.5
7.5°	771.8
10°	761.3
12.5°	753.5
15°	755.3
17.5°	769.2
20°	793.5
22.5°	821.2
25°	836.9
27.5°	828.2
30°	790.0
32.5°	723.1
35°	619.9
37.5°	477.4
40°	341.1
42.5°	254.4
45°	205.7
47.5°	173.6
50°	145.0
52.5°	115.4
55°	85.9
57.5°	59.0
60°	36.5
62.5°	20.0
65°	9.5
67.5°	4.3
70°	2.7
72.5°	1.7
75°	1.7
77.5°	0.8
80°	0.8
82.5°	0.8
85°	0.8
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)