

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P583900

Luminaire Tested: **HC815D010-HM80520927-81MDH**

Issue Date: 10/21/2021

Test Information

Test Method: LM-41-14
Report Number: P583900
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2109-368-5)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 10/21/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC815D010-HM80520927-81MDH
Description: HALO COMMERCIAL 8" ROUND, NEW CONSTRUCTION FRAME, WITH 8" MEDIUM DISTRIBUTION, HAZE TRIM
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1281.9 lumens
Efficiency: N/A
Efficacy: 91.6 lumens/watt
Spacing Criteria (0/90/45): 0.68 / 0.68 / 0.81
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct


Input Watts (W): 14
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P583900

CATALOG NUMBER: HC815D010-HM80520927-81MDH

Luminous Intensity Polar Plot

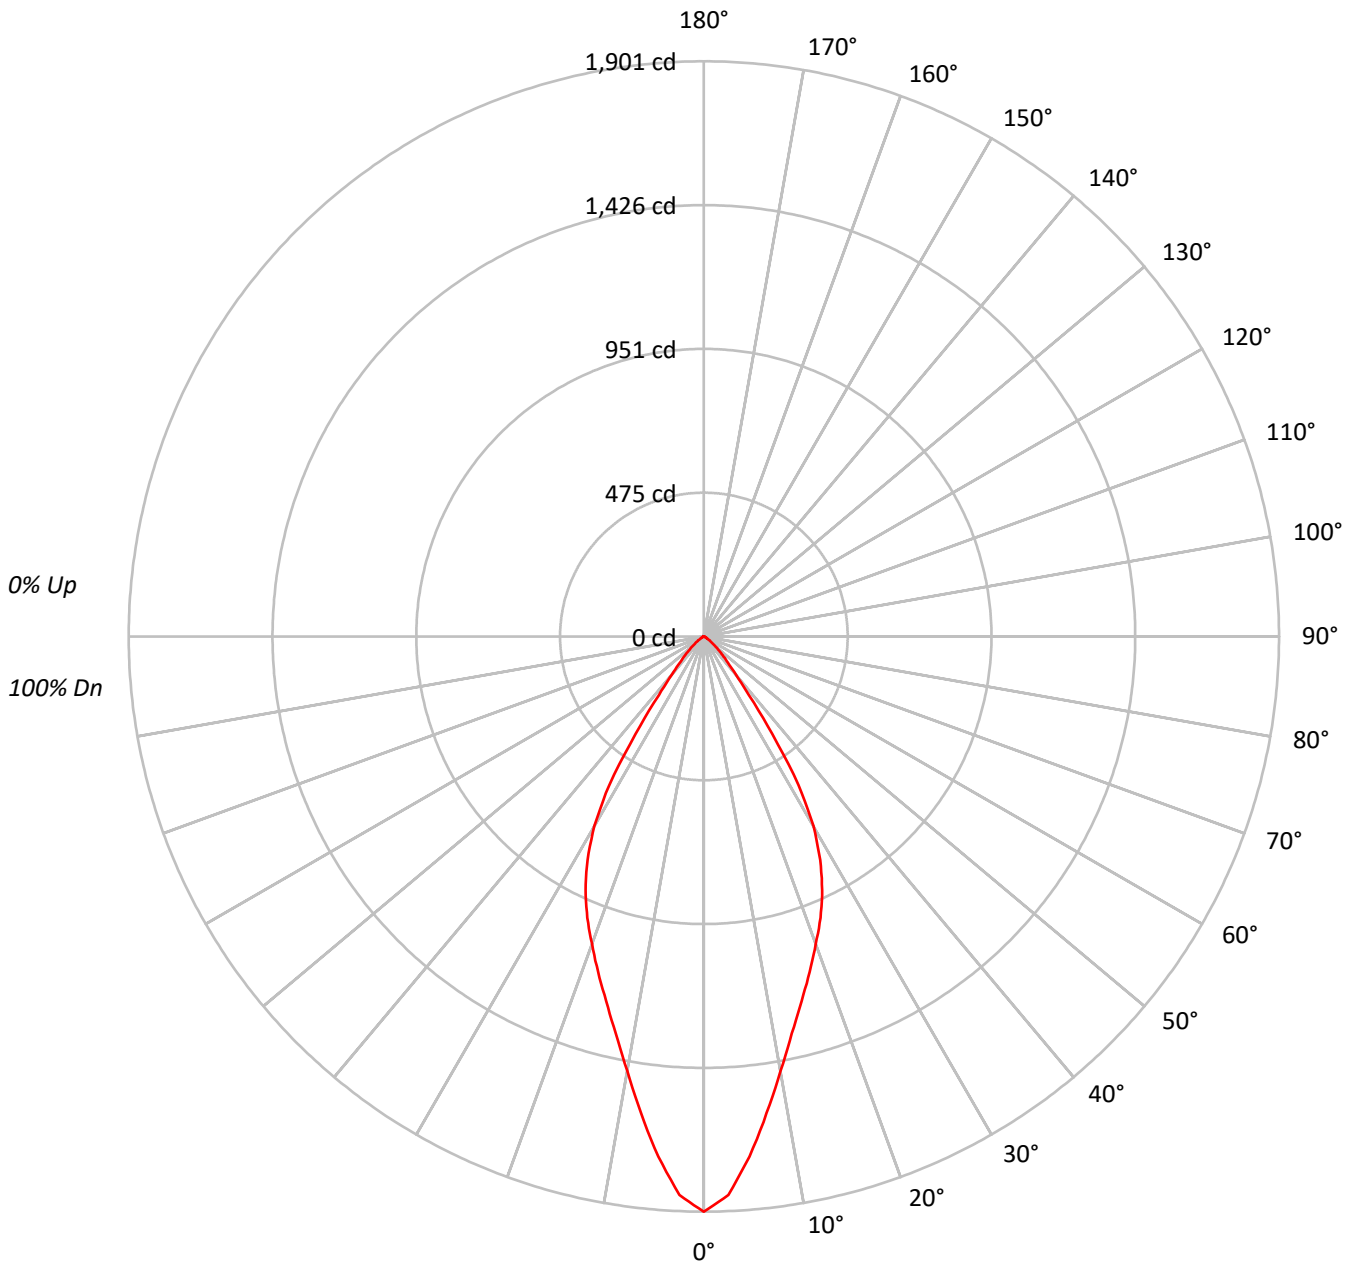



TEST NUMBER: P583900

CATALOG NUMBER: HC815D010-HM80520927-81MDH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10		0		
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	114	111	108	106	111	109	106	104	105	103	101	101	99	98	97	96	95	94			
2	108	103	99	96	106	101	98	95	98	95	93	95	93	91	92	91	89	87			
3	103	96	91	87	101	95	90	87	92	88	85	90	87	84	88	85	83	81			
4	97	90	85	80	96	89	84	80	87	82	79	85	81	78	83	80	77	76			
5	93	84	79	74	91	83	78	74	82	77	73	80	76	73	78	75	72	71			
6	88	79	73	69	87	78	73	69	77	72	68	76	71	68	74	70	67	66			
7	84	75	69	65	82	74	68	64	73	68	64	71	67	64	70	66	63	62			
8	80	70	64	60	79	70	64	60	69	64	60	68	63	60	67	63	60	58			
9	76	67	61	57	75	66	61	57	65	60	57	64	60	56	63	59	56	55			
10	73	63	57	54	72	63	57	53	62	57	53	61	56	53	60	56	53	52			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	58626
5°	53424
10°	45647
15°	39806
20°	35480
25°	31476
30°	25769
35°	14798
40°	6569
45°	3820
50°	2207
55°	1258
60°	697
65°	438
70°	316
75°	203
80°	142
85°	283



TEST NUMBER: P583900

CATALOG NUMBER: HC815D010-HM80520927-81MDH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	156.2	12.2
10°-20°	350.5	27.3
20°-30°	419.6	32.7
30°-40°	253.8	19.8
40°-50°	71.1	5.5
50°-60°	22.1	1.7
60°-70°	6.3	0.5
70°-80°	1.7	0.1
80°-90°	0.5	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	926.3	72.3
0°-40°	1180.2	92.1
0°-60°	1273.4	99.3
0°-90°	1281.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1281.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1901	
5°	1726	156
15°	1247	351
25°	925	420
35°	393	254
45°	88	71
55°	23	22
65°	6	6
75°	2	2
85°	1	1
90°	0	



TEST NUMBER: P583900

CATALOG NUMBER: HC815D010-HM80520927-81MDH

CANDELA DISTRIBUTION (FULL):

	0°
0°	1901.2
2.5°	1847.5
5°	1725.9
7.5°	1588.9
10°	1457.8
12.5°	1343.3
15°	1246.9
17.5°	1162.0
20°	1081.2
22.5°	1006.7
25°	925.1
27.5°	833.0
30°	723.7
32.5°	582.3
35°	393.1
37.5°	244.7
40°	163.2
42.5°	117.1
45°	87.6
47.5°	64.2
50°	46.0
52.5°	32.1
55°	23.4
57.5°	15.7
60°	11.3
62.5°	7.8
65°	6.0
67.5°	4.3
70°	3.5
72.5°	1.7
75°	1.7
77.5°	0.8
80°	0.8
82.5°	0.8
85°	0.8
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)