

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P593589

Luminaire Tested: **HC820D010-HM80520850-81MDC**

Issue Date: 10/21/2021

Test Information

Test Method: LM-41-14
Report Number: P593589
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2109-368-4)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 10/21/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC820D010-HM80520850-81MDC
Description: HALO COMMERCIAL 8" ROUND, NEW CONSTRUCTION FRAME, WITH 8" MEDIUM DISTRIBUTION, SPECULAR TRIM
Light Source: (1) HIGH LUMEN LED 80CRI / 5000K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2615.3 lumens
Efficiency: N/A
Efficacy: 130.8 lumens/watt
Spacing Criteria (0/90/45): 0.58 / 0.58 / 0.67
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct


Input Watts (W): 20
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P593589

CATALOG NUMBER: HC820D010-HM80520850-81MDC

Luminous Intensity Polar Plot

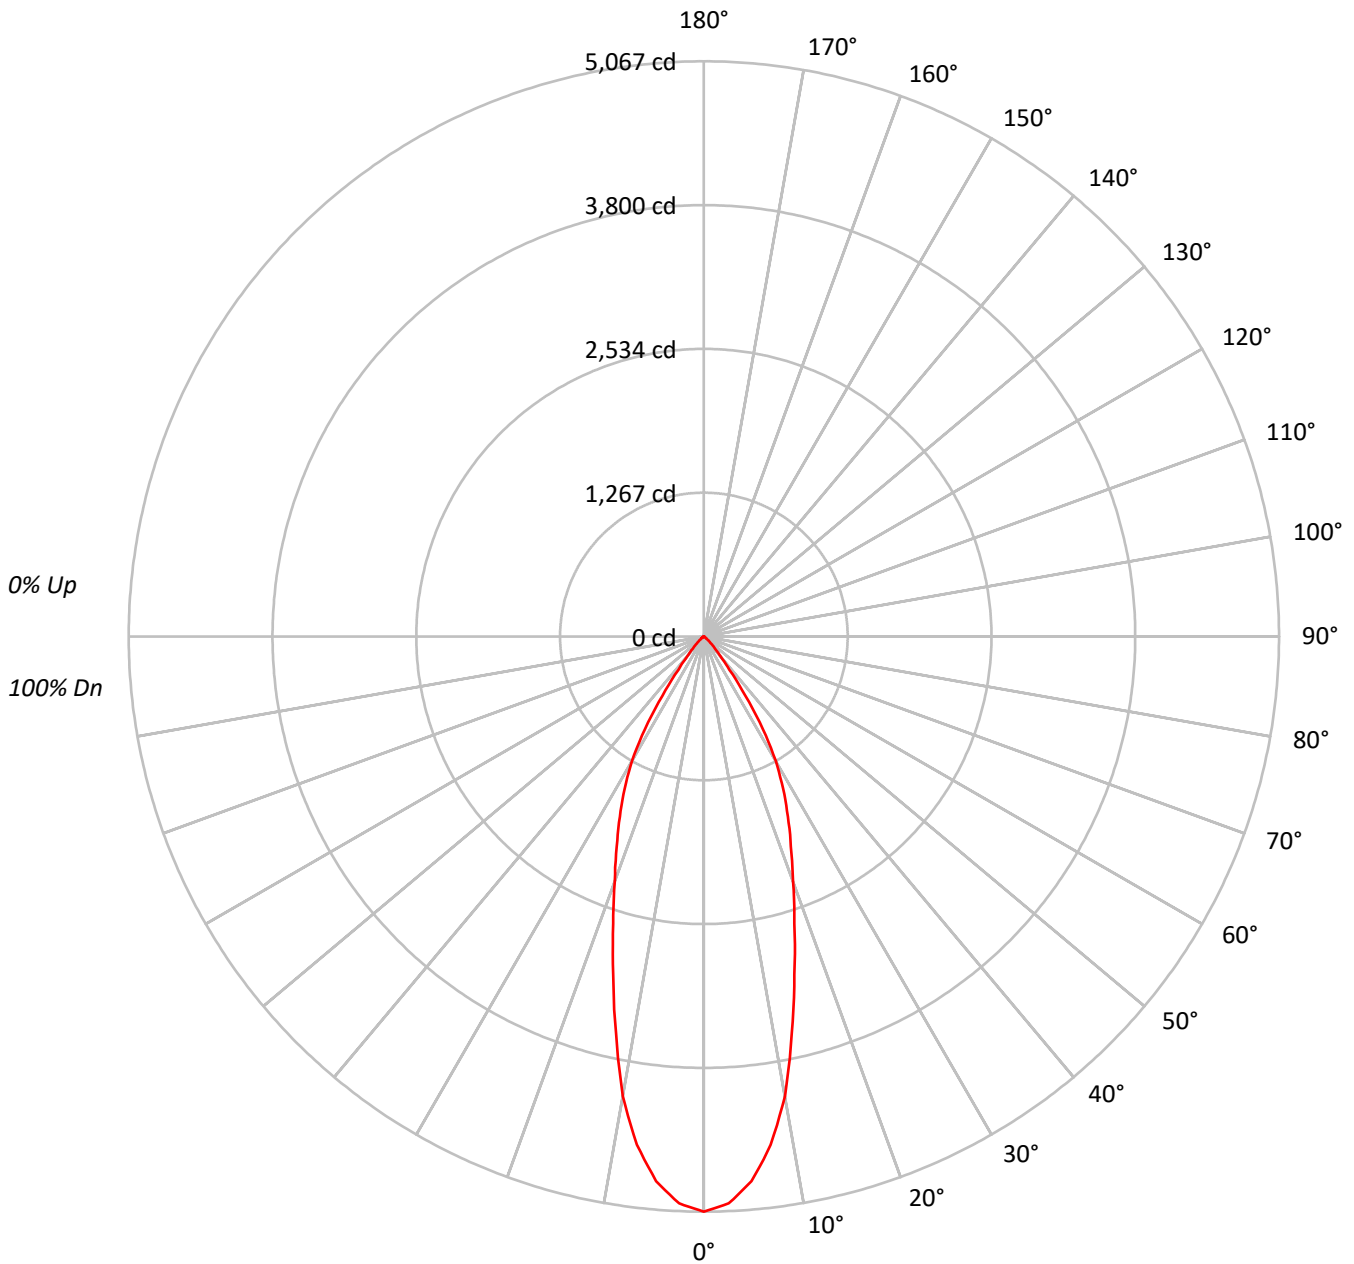



TEST NUMBER: P593589

CATALOG NUMBER: HC820D010-HM80520850-81MDC

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	114	111	109	107	112	109	107	105	105	104	102	102	100	99	98	97	96	95	95	95	95
2	109	105	101	98	107	103	100	97	100	97	95	97	95	93	94	92	91	89	89	89	89
3	104	98	94	90	102	97	93	90	94	91	88	92	89	87	90	87	85	84	84	84	84
4	100	93	88	84	98	92	87	83	90	86	82	88	84	82	86	83	81	79	79	79	79
5	95	88	82	78	94	87	82	78	85	81	77	83	80	77	82	79	76	75	75	75	75
6	91	83	78	74	90	82	77	73	81	76	73	79	76	73	78	75	72	71	71	71	71
7	87	79	73	70	86	78	73	69	77	72	69	76	72	69	75	71	68	67	67	67	67
8	84	75	70	66	82	74	69	66	73	69	65	72	68	65	71	68	65	64	64	64	64
9	80	71	66	62	79	71	66	62	70	65	62	69	65	62	68	65	62	61	61	61	61
10	77	68	63	59	76	68	63	59	67	62	59	66	62	59	65	62	59	58	58	58	58

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	156260
5°	149087
10°	128721
15°	98425
20°	75311
25°	59580
30°	45007
35°	23942
40°	9122
45°	4378
50°	1866
55°	780
60°	296
65°	233
70°	153
75°	0
80°	0
85°	0



TEST NUMBER: P593589

CATALOG NUMBER: HC820D010-HM80520850-81MDC

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	437.2	16.7
10°-20°	860.7	32.9
20°-30°	801.6	30.7
30°-40°	413.6	15.8
40°-50°	84.3	3.2
50°-60°	14.4	0.6
60°-70°	2.8	0.1
70°-80°	0.7	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2099.5	80.3
0°-40°	2513.2	96.1
0°-60°	2611.8	99.9
0°-90°	2615.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2615.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	5067	
5°	4816	437
15°	3083	861
25°	1751	802
35°	636	414
45°	100	84
55°	14	14
65°	3	3
75°	0	1
85°	0	0
90°	0	



TEST NUMBER: P593589

CATALOG NUMBER: HC820D010-HM80520850-81MDC

CANDELA DISTRIBUTION (FULL):

0°	
0°	5067.4
2.5°	4999.4
5°	4816.4
7.5°	4515.5
10°	4110.9
12.5°	3579.9
15°	3083.1
17.5°	2652.6
20°	2295.0
22.5°	2003.6
25°	1751.1
27.5°	1511.7
30°	1264.0
32.5°	969.5
35°	636.0
37.5°	369.0
40°	226.6
42.5°	148.9
45°	100.4
47.5°	63.1
50°	38.9
52.5°	22.7
55°	14.5
57.5°	6.5
60°	4.8
62.5°	3.2
65°	3.2
67.5°	1.7
70°	1.7
72.5°	1.7
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)