

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P584110

Luminaire Tested: **HC825D010-HM82555827-81WDH**

Issue Date: 10/21/2021

Test Information

Test Method: LM-41-14
Report Number: P584110
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2109-368-8)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 10/21/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC825D010-HM82555827-81WDH
Description: HALO COMMERCIAL 8" ROUND, NEW CONSTRUCTION FRAME, WITH 8" WIDE DISTRIBUTION, HAZE TRIM
Light Source: (1) HIGH LUMEN LED 80CRI / 2700K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2627.2 lumens
Efficiency: N/A
Efficacy: 98.0 lumens/watt
Spacing Criteria (0/90/45): 1.12 / 1.12 / 1.06
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct


Input Watts (W): 26.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P584110

CATALOG NUMBER: HC825D010-HM82555827-81WDH

Luminous Intensity Polar Plot

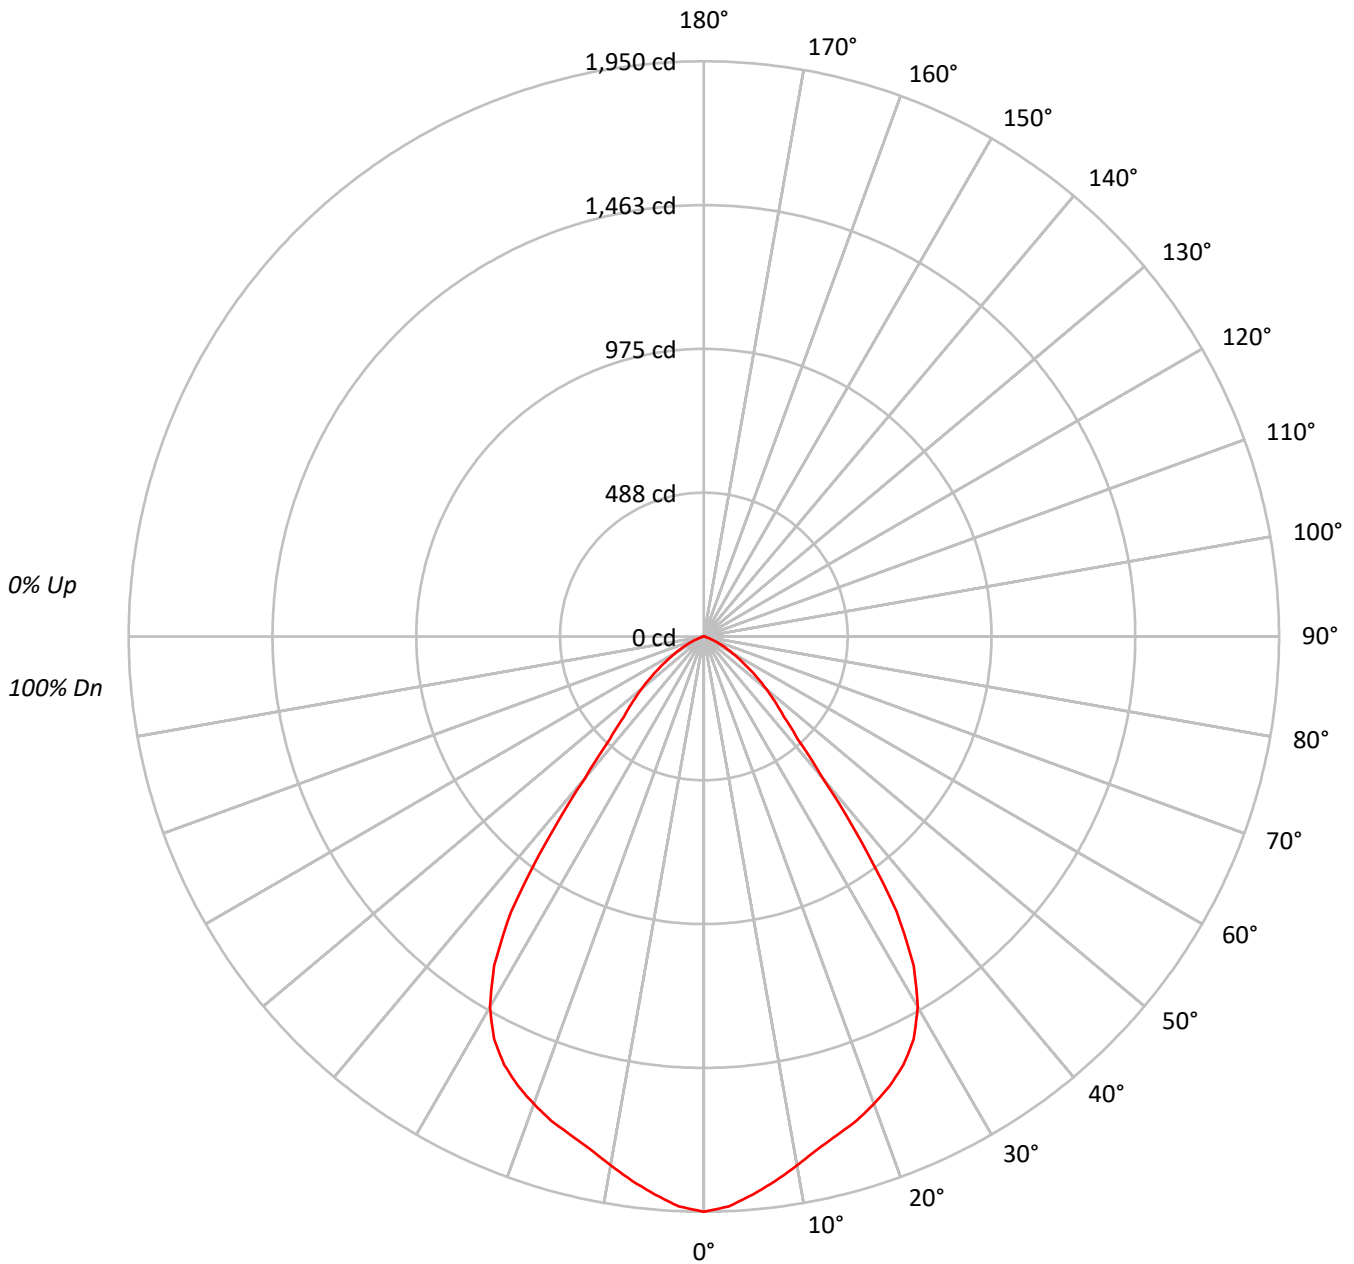



TEST NUMBER: P584110

CATALOG NUMBER: HC825D010-HM82555827-81WDH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	109	107	104	110	107	105	102	103	101	99	99	98	96	96	95	93	92			
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	87	85	83			
3	99	92	86	81	97	90	85	81	88	83	79	85	81	78	83	80	77	75			
4	93	84	78	73	91	83	77	72	81	76	72	79	74	71	77	73	70	68			
5	87	78	71	66	86	77	70	66	75	69	65	73	68	64	71	67	64	62			
6	82	72	65	60	80	71	64	60	69	64	59	68	63	59	66	62	58	57			
7	77	67	60	55	76	66	59	55	64	59	54	63	58	54	62	57	54	52			
8	73	62	55	50	71	61	55	50	60	54	50	59	54	50	58	53	49	48			
9	69	58	51	46	67	57	51	46	56	50	46	55	50	46	54	49	46	44			
10	65	54	47	43	64	53	47	43	53	47	43	52	46	43	51	46	42	41			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	60146
5°	58794
10°	56991
15°	55835
20°	55336
25°	54507
30°	51633
35°	42899
40°	25263
45°	16711
50°	13149
55°	9677
60°	6722
65°	4101
70°	1785
75°	786
80°	586
85°	0



TEST NUMBER: P584110

CATALOG NUMBER: HC825D010-HM82555827-81WDH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	178.9	6.8
10°-20°	494.5	18.8
20°-30°	732.6	27.9
30°-40°	677.0	25.8
40°-50°	312.1	11.9
50°-60°	164.1	6.2
60°-70°	58.0	2.2
70°-80°	9.1	0.3
80°-90°	0.9	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1405.9	53.5
0°-40°	2082.9	79.3
0°-60°	2559.2	97.4
0°-90°	2627.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2627.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1950	
5°	1899	179
15°	1749	494
25°	1602	733
35°	1140	677
45°	383	312
55°	180	164
65°	56	58
75°	7	9
85°	0	1
90°	0	



TEST NUMBER: P584110

CATALOG NUMBER: HC825D010-HM82555827-81WDH

CANDELA DISTRIBUTION (FULL):

	0°
0°	1950.5
2.5°	1934.0
5°	1899.4
7.5°	1861.4
10°	1820.1
12.5°	1780.4
15°	1749.0
17.5°	1721.0
20°	1686.3
22.5°	1648.3
25°	1602.0
27.5°	1539.3
30°	1450.1
32.5°	1322.9
35°	1139.6
37.5°	875.4
40°	627.6
42.5°	470.7
45°	383.2
47.5°	325.4
50°	274.1
52.5°	224.6
55°	180.0
57.5°	142.0
60°	109.0
62.5°	82.6
65°	56.2
67.5°	33.1
70°	19.8
72.5°	11.6
75°	6.6
77.5°	4.9
80°	3.3
82.5°	1.6
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)