

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P584111

Luminaire Tested: **HC825D010-HM82555827-81WDW**

Issue Date: 10/21/2021

**Test Information**

Test Method: LM-41-14  
Report Number: P584111  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2109-368-9)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 10/21/2021  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: HALO COMMERCIAL  
Catalog Number: HC825D010-HM82555827-81WDW  
Description: HALO COMMERCIAL 8" ROUND, NEW CONSTRUCTION FRAME, WITH 8" WIDE DISTRIBUTION, WHITE TRIM  
Light Source: (1) HIGH LUMEN LED 80CRI / 2700K CCT  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2536.4 lumens  
Efficiency: N/A  
Efficacy: 94.6 lumens/watt  
Spacing Criteria (0/90/45): 1.17 / 1.17 / 1.06  
Luminous Opening: Circular (Dia: 0.67' x H: 0')  
CIE Type: Direct


Input Watts (W): 26.8  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P584111

CATALOG NUMBER: HC825D010-HM82555827-81WDW

### Luminous Intensity Polar Plot

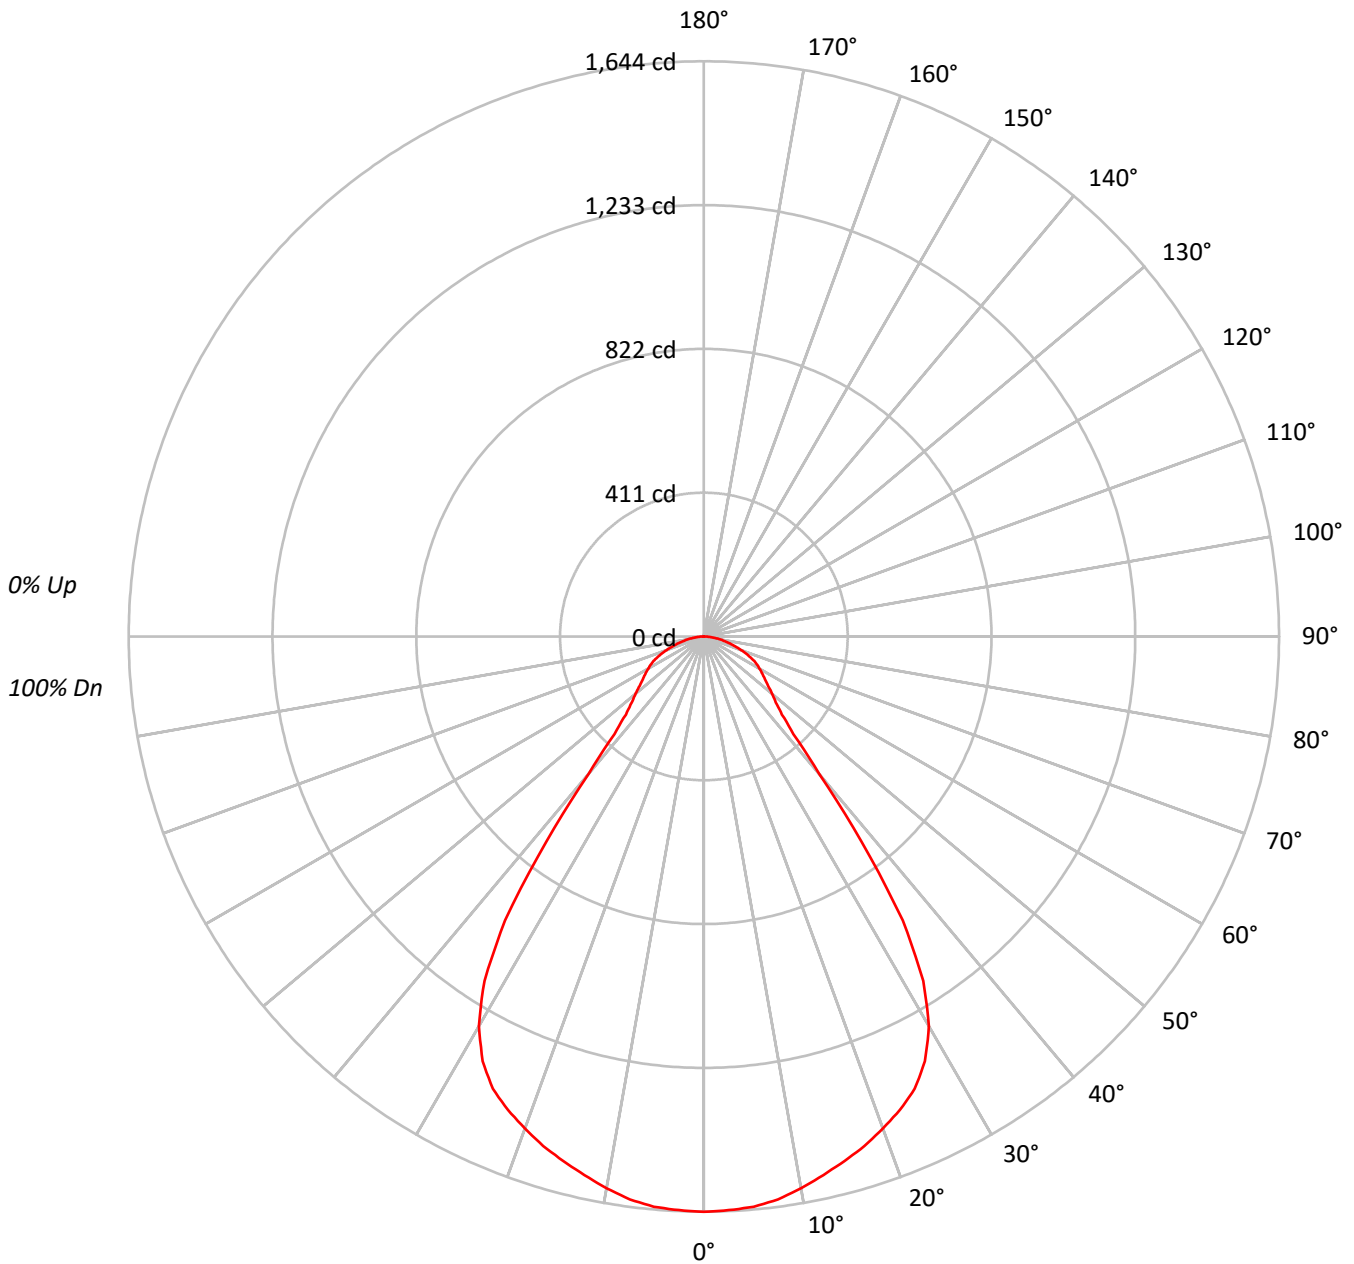



TEST NUMBER: P584111

CATALOG NUMBER: HC825D010-HM82555827-81WDW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |     |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|-----|
| RF  | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     | 20  |     |    |    |     |
| RC  | 80  |     |     |     | 70  |     |     |     | 50  |     |     |     | 30  |     |     |     | 10  |     |    | 0  |     |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30 | 10 | 0   |
| RCR |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |     |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 |    |    | 100 |
| 1   | 111 | 108 | 104 | 101 | 109 | 105 | 102 | 100 | 101 | 99  | 96  | 97  | 95  | 94  | 94  | 92  | 91  | 89  |    |    | 89  |
| 2   | 104 | 97  | 92  | 87  | 101 | 95  | 90  | 86  | 92  | 88  | 84  | 89  | 85  | 82  | 86  | 83  | 81  | 79  |    |    | 79  |
| 3   | 97  | 88  | 82  | 76  | 94  | 87  | 81  | 76  | 84  | 79  | 75  | 81  | 77  | 73  | 79  | 75  | 72  | 70  |    |    | 70  |
| 4   | 90  | 80  | 73  | 68  | 88  | 79  | 73  | 67  | 77  | 71  | 67  | 75  | 70  | 66  | 73  | 68  | 65  | 63  |    |    | 63  |
| 5   | 84  | 74  | 66  | 61  | 82  | 73  | 66  | 61  | 71  | 65  | 60  | 69  | 64  | 59  | 67  | 63  | 59  | 57  |    |    | 57  |
| 6   | 79  | 68  | 61  | 55  | 77  | 67  | 60  | 55  | 65  | 59  | 55  | 64  | 58  | 54  | 62  | 58  | 54  | 52  |    |    | 52  |
| 7   | 74  | 63  | 56  | 50  | 73  | 62  | 55  | 50  | 61  | 54  | 50  | 59  | 54  | 50  | 58  | 53  | 49  | 48  |    |    | 48  |
| 8   | 70  | 58  | 51  | 46  | 69  | 58  | 51  | 46  | 57  | 50  | 46  | 55  | 50  | 46  | 54  | 49  | 45  | 44  |    |    | 44  |
| 9   | 66  | 54  | 47  | 43  | 65  | 54  | 47  | 42  | 53  | 47  | 42  | 52  | 46  | 42  | 51  | 46  | 42  | 40  |    |    | 40  |
| 10  | 62  | 51  | 44  | 39  | 61  | 50  | 44  | 39  | 49  | 43  | 39  | 49  | 43  | 39  | 48  | 43  | 39  | 37  |    |    | 37  |

**AVERAGE LUMINANCE (cd/sqm):**

|     |       |
|-----|-------|
|     | 0°    |
| 0°  | 50707 |
| 5°  | 50644 |
| 10° | 50146 |
| 15° | 49543 |
| 20° | 49088 |
| 25° | 48535 |
| 30° | 45794 |
| 35° | 37290 |
| 40° | 20602 |
| 45° | 13750 |
| 50° | 12195 |
| 55° | 11446 |
| 60° | 11305 |
| 65° | 11200 |
| 70° | 10116 |
| 75° | 9055  |
| 80° | 7920  |
| 85° | 7005  |



TEST NUMBER: P584111

CATALOG NUMBER: HC825D010-HM82555827-81WDW

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 155.1  | 6.1       |
| 10°-20°   | 438.2  | 17.3      |
| 20°-30°   | 651.1  | 25.7      |
| 30°-40°   | 586.4  | 23.1      |
| 40°-50°   | 260.0  | 10.2      |
| 50°-60°   | 192.5  | 7.6       |
| 60°-70°   | 149.7  | 5.9       |
| 70°-80°   | 81.2   | 3.2       |
| 80°-90°   | 22.2   | 0.9       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| 0°-30°    | 1244.4 | 49.1      |
| 0°-40°    | 1830.8 | 72.2      |
| 0°-60°    | 2283.3 | 90.0      |
| 0°-90°    | 2536.4 | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 2536.4 | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°   | Flux |
|-----|------|------|
| 0°  | 1644 |      |
| 5°  | 1636 | 155  |
| 15° | 1552 | 438  |
| 25° | 1426 | 651  |
| 35° | 991  | 586  |
| 45° | 315  | 260  |
| 55° | 213  | 193  |
| 65° | 154  | 150  |
| 75° | 76   | 81   |
| 85° | 20   | 22   |
| 90° | 0    |      |



TEST NUMBER: P584111

CATALOG NUMBER: HC825D010-HM82555827-81WDW

**CANDELA DISTRIBUTION (FULL):**

| 0°    |        |
|-------|--------|
| 0°    | 1644.4 |
| 2.5°  | 1641.2 |
| 5°    | 1636.1 |
| 7.5°  | 1623.0 |
| 10°   | 1601.5 |
| 12.5° | 1576.8 |
| 15°   | 1551.9 |
| 17.5° | 1527.2 |
| 20°   | 1495.9 |
| 22.5° | 1464.5 |
| 25°   | 1426.5 |
| 27.5° | 1368.7 |
| 30°   | 1286.1 |
| 32.5° | 1167.3 |
| 35°   | 990.6  |
| 37.5° | 739.7  |
| 40°   | 511.8  |
| 42.5° | 378.1  |
| 45°   | 315.3  |
| 47.5° | 279.1  |
| 50°   | 254.2  |
| 52.5° | 231.1  |
| 55°   | 212.9  |
| 57.5° | 198.2  |
| 60°   | 183.3  |
| 62.5° | 170.0  |
| 65°   | 153.5  |
| 67.5° | 133.8  |
| 70°   | 112.2  |
| 72.5° | 94.2   |
| 75°   | 76.0   |
| 77.5° | 59.4   |
| 80°   | 44.6   |
| 82.5° | 31.4   |
| 85°   | 19.8   |
| 87.5° | 8.2    |
| 90°   | 0.0    |



Report Generated By 670245859 / DESKTOP-HRDQ47P







— 0°-180°







(END OF REPORT)