

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P584154

Luminaire Tested: **HC825D010-HM82555840-81NDH**

Issue Date: 10/21/2021

**Test Information**

Test Method: LM-41-14  
Report Number: P584154  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2109-368-2)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 10/21/2021  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: HALO COMMERCIAL  
Catalog Number: HC825D010-HM82555840-81NDH  
Description: HALO COMMERCIAL 8" ROUND, NEW CONSTRUCTION FRAME, WITH 8" NARROW DISTRIBUTION, HAZE TRIM  
Light Source: (1) HIGH LUMEN LED 80CRI / 4000K CCT  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2506.5 lumens  
Efficiency: N/A  
Efficacy: 93.5 lumens/watt  
Spacing Criteria (0/90/45): 0.42 / 0.42 / 0.57  
Luminous Opening: Circular (Dia: 0.67' x H: 0')  
CIE Type: Direct


Input Watts (W): 26.8  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P584154

CATALOG NUMBER: HC825D010-HM82555840-81NDH

### Luminous Intensity Polar Plot

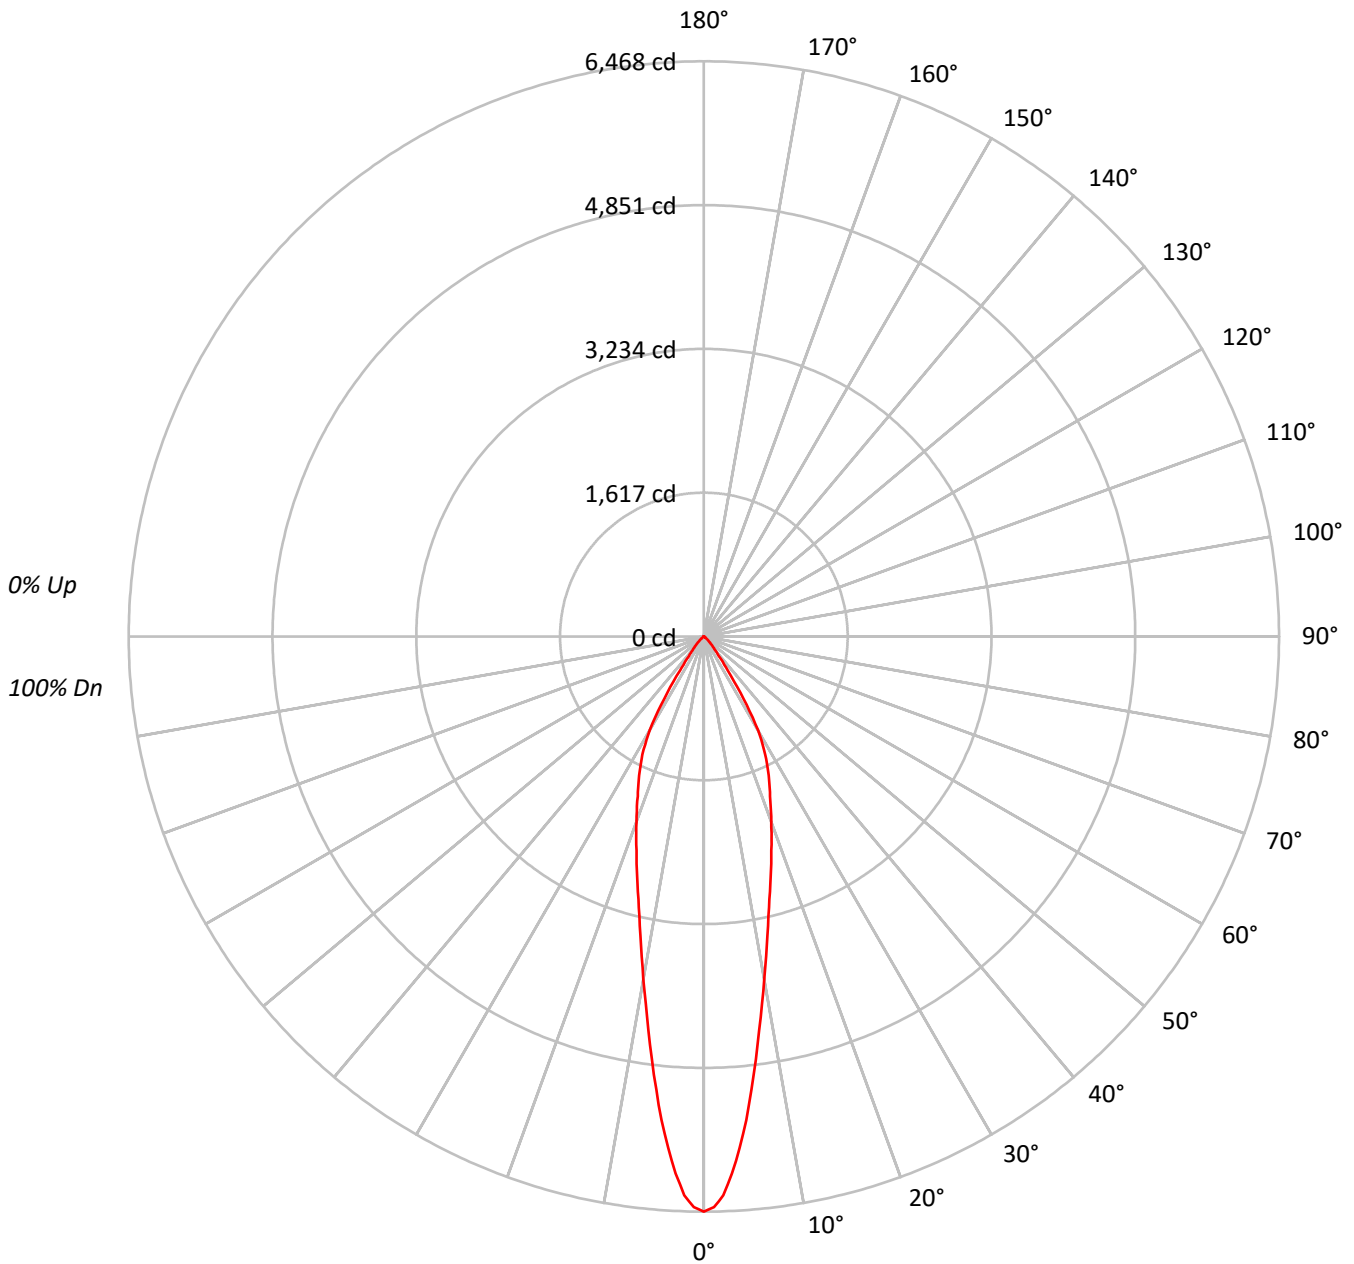



TEST NUMBER: P584154

CATALOG NUMBER: HC825D010-HM82555840-81NDH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	114	112	109	107	112	109	107	106	105	104	102	102	100	99	98	97	96	95	95	95	95
2	109	105	101	98	107	103	100	97	100	97	95	97	95	93	94	92	91	89	89	89	89
3	104	99	94	91	102	97	93	90	95	91	88	92	90	87	90	88	86	84	84	84	84
4	100	93	88	84	98	92	87	84	90	86	83	88	85	82	86	83	81	80	80	80	80
5	96	88	83	79	94	87	82	79	86	81	78	84	80	77	82	79	77	75	75	75	75
6	92	84	78	75	90	83	78	74	81	77	74	80	76	73	79	76	73	72	72	72	72
7	88	80	74	70	87	79	74	70	78	73	70	77	73	70	76	72	69	68	68	68	68
8	84	76	71	67	83	75	70	67	74	70	66	73	69	66	72	69	66	65	65	65	65
9	81	72	67	64	80	72	67	63	71	66	63	70	66	63	69	66	63	62	62	62	62
10	78	69	64	61	77	69	64	61	68	63	60	67	63	60	67	63	60	59	59	59	59

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	199449
5°	168975
10°	122602
15°	92069
20°	72643
25°	58596
30°	43422
35°	17595
40°	7423
45°	3982
50°	1785
55°	903
60°	574
65°	409
70°	334
75°	214
80°	320
85°	637



TEST NUMBER: P584154

CATALOG NUMBER: HC825D010-HM82555840-81NDH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	468.7	18.7
10°-20°	810.0	32.3
20°-30°	783.2	31.2
30°-40°	344.0	13.7
40°-50°	74.4	3.0
50°-60°	16.7	0.7
60°-70°	5.7	0.2
70°-80°	2.2	0.1
80°-90°	1.7	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2061.9	82.3
0°-40°	2405.8	96.0
0°-60°	2496.9	99.6
0°-90°	2506.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2506.5	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	6468	
5°	5459	469
15°	2884	810
25°	1722	783
35°	467	344
45°	91	74
55°	17	17
65°	6	6
75°	2	2
85°	2	2
90°	0	



TEST NUMBER: P584154

CATALOG NUMBER: HC825D010-HM82555840-81NDH

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	6468.0
1°	6419.7
2°	6287.4
3°	6049.1
4°	5764.3
5°	5458.9
6°	5125.6
7°	4790.5
8°	4475.9
9°	4183.6
10°	3915.5
11°	3662.3
12°	3435.1
13°	3228.4
14°	3046.0
15°	2884.0
17.5°	2520.9
20°	2213.7
22.5°	1943.8
25°	1722.2
27.5°	1496.9
30°	1219.5
32.5°	828.5
35°	467.4
37.5°	275.5
40°	184.4
42.5°	130.3
45°	91.3
47.5°	59.6
50°	37.2
52.5°	22.4
55°	16.8
57.5°	13.1
60°	9.3
62.5°	7.5
65°	5.6
67.5°	3.7
70°	3.7
72.5°	1.8
75°	1.8
77.5°	1.8
80°	1.8
82.5°	1.8



TEST NUMBER: P584154

CATALOG NUMBER: HC825D010-HM82555840-81NDH

**CANDELA DISTRIBUTION (continued):**

0°  
90° | 0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P







— 0°-180°







85°		1.8
87.5°		1.8



(END OF REPORT)