

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P584219

Luminaire Tested: **HC825D010-HM82555940-81MDH**

Issue Date: 10/21/2021

**Test Information**

Test Method: LM-41-14  
Report Number: P584219  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2109-368-5)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 10/21/2021  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: HALO COMMERCIAL  
Catalog Number: HC825D010-HM82555940-81MDH  
Description: HALO COMMERCIAL 8" ROUND, NEW CONSTRUCTION FRAME, WITH 8" MEDIUM DISTRIBUTION, HAZE TRIM  
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2602.3 lumens  
Efficiency: N/A  
Efficacy: 97.1 lumens/watt  
Spacing Criteria (0/90/45): 0.68 / 0.68 / 0.81  
Luminous Opening: Circular (Dia: 0.67' x H: 0')  
CIE Type: Direct


Input Watts (W): 26.8  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P584219

CATALOG NUMBER: HC825D010-HM82555940-81MDH

### Luminous Intensity Polar Plot

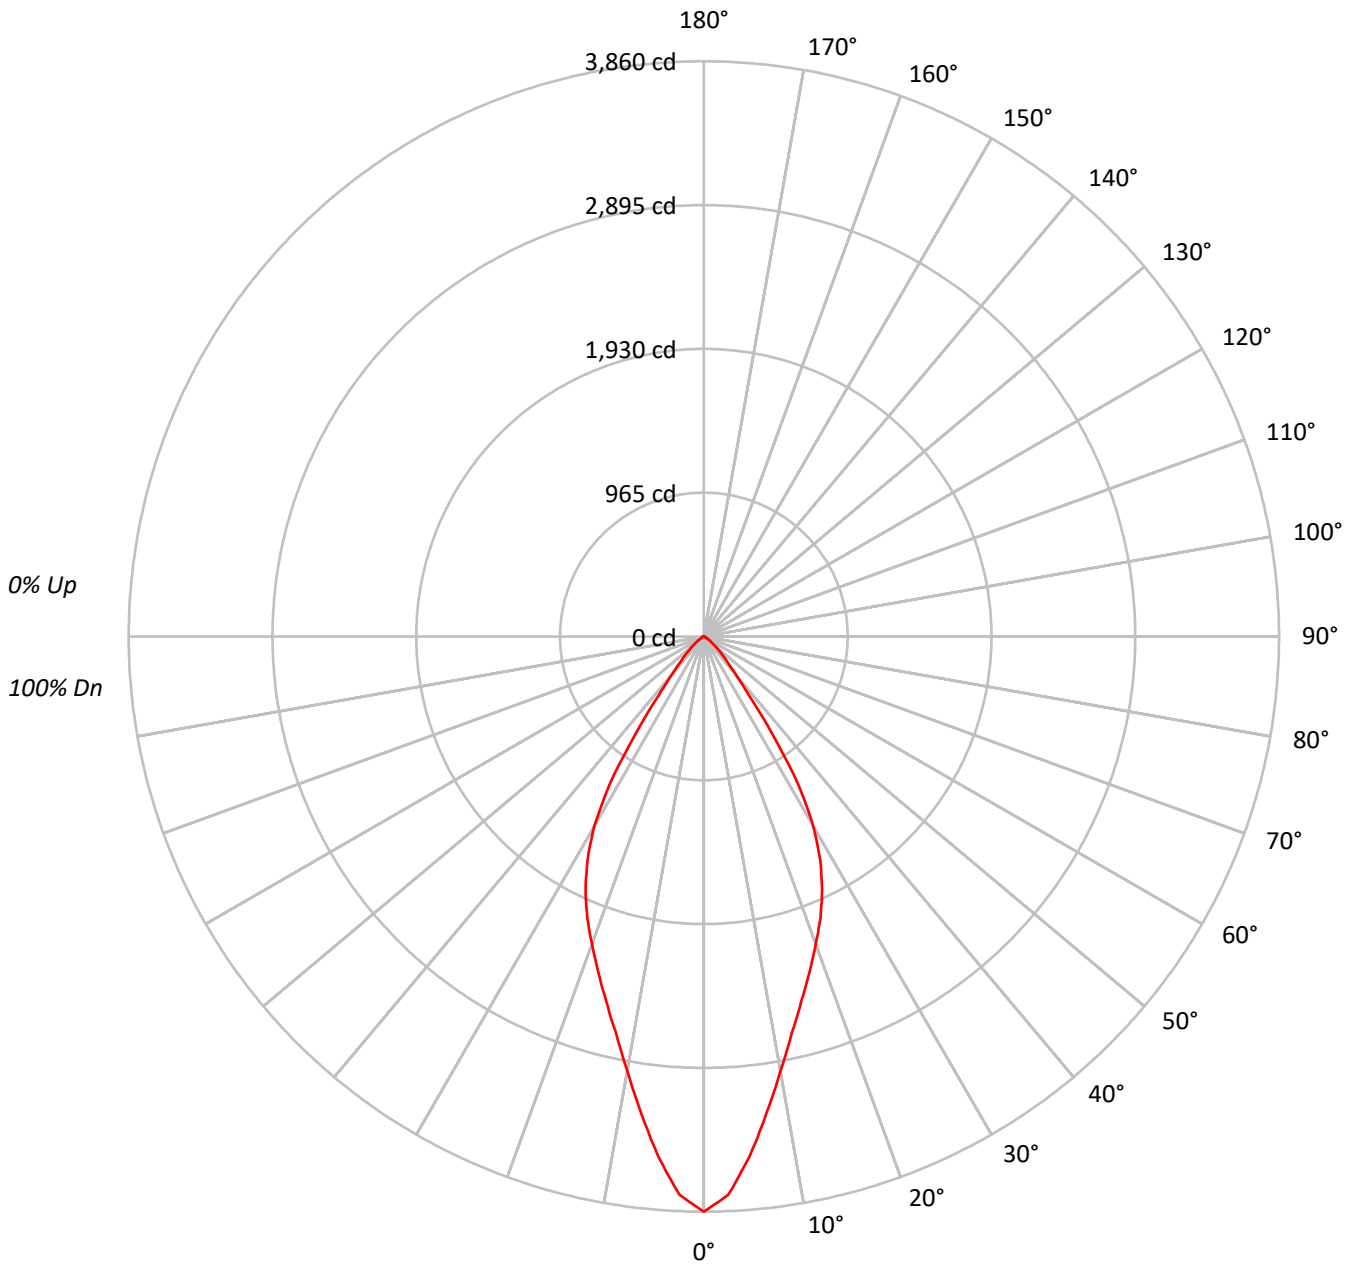



TEST NUMBER: P584219

CATALOG NUMBER: HC825D010-HM82555940-81MDH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	114	111	108	106	111	109	106	104	105	103	101	101	99	98	97	96	95	94			
2	108	103	99	96	106	101	98	95	98	95	93	95	93	91	92	91	89	87			
3	103	96	91	87	101	95	90	87	92	88	85	90	87	84	88	85	83	81			
4	97	90	85	80	96	89	84	80	87	82	79	85	81	78	83	80	77	76			
5	93	84	79	74	91	83	78	74	82	77	73	80	76	73	78	75	72	71			
6	88	79	73	69	87	78	73	69	77	72	68	76	71	68	74	70	67	66			
7	84	75	69	64	82	74	68	64	73	68	64	71	67	64	70	66	63	62			
8	80	70	64	60	79	70	64	60	69	64	60	68	63	60	67	63	60	58			
9	76	67	61	57	75	66	61	57	65	60	57	64	60	56	63	59	56	55			
10	73	63	57	54	72	63	57	53	62	57	53	61	56	53	60	56	53	52			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	119016
5°	108454
10°	92665
15°	80813
20°	72026
25°	63890
30°	52310
35°	30040
40°	13332
45°	7758
50°	4481
55°	2559
60°	1412
65°	897
70°	640
75°	417
80°	302
85°	601



TEST NUMBER: P584219

CATALOG NUMBER: HC825D010-HM82555940-81MDH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	317.2	12.2
10°-20°	711.6	27.3
20°-30°	851.7	32.7
30°-40°	515.3	19.8
40°-50°	144.4	5.5
50°-60°	44.9	1.7
60°-70°	12.8	0.5
70°-80°	3.4	0.1
80°-90°	1.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1880.4	72.3
0°-40°	2395.7	92.1
0°-60°	2585.0	99.3
0°-90°	2602.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2602.3	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	3860	
5°	3504	317
15°	2531	712
25°	1878	852
35°	798	515
45°	178	144
55°	48	45
65°	12	13
75°	4	3
85°	2	1
90°	0	



TEST NUMBER: P584219

CATALOG NUMBER: HC825D010-HM82555940-81MDH

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	3859.6
2.5°	3750.4
5°	3503.7
7.5°	3225.4
10°	2959.4
12.5°	2726.9
15°	2531.4
17.5°	2358.7
20°	2194.9
22.5°	2043.4
25°	1877.8
27.5°	1691.1
30°	1469.1
32.5°	1182.0
35°	798.0
37.5°	496.8
40°	331.2
42.5°	237.9
45°	177.9
47.5°	130.3
50°	93.4
52.5°	65.2
55°	47.6
57.5°	31.7
60°	22.9
62.5°	15.8
65°	12.3
67.5°	8.8
70°	7.1
72.5°	3.5
75°	3.5
77.5°	1.7
80°	1.7
82.5°	1.7
85°	1.7
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P







— 0°-180°







(END OF REPORT)