

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P584221

Luminaire Tested: **HC825D010-HM82555940-81NDC**

Issue Date: 10/21/2021

Test Information

Test Method: LM-41-14
Report Number: P584221
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2109-368-1)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 10/21/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC825D010-HM82555940-81NDC
Description: HALO COMMERCIAL 8" ROUND, NEW CONSTRUCTION FRAME, WITH 8" NARROW DISTRIBUTION, SPECULAR TRIM
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2616.3 lumens
Efficiency: N/A
Efficacy: 97.6 lumens/watt
Spacing Criteria (0/90/45): 0.22 / 0.22 / 0.27
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct


Input Watts (W): 26.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P584221

CATALOG NUMBER: HC825D010-HM82555940-81NDC

Luminous Intensity Polar Plot

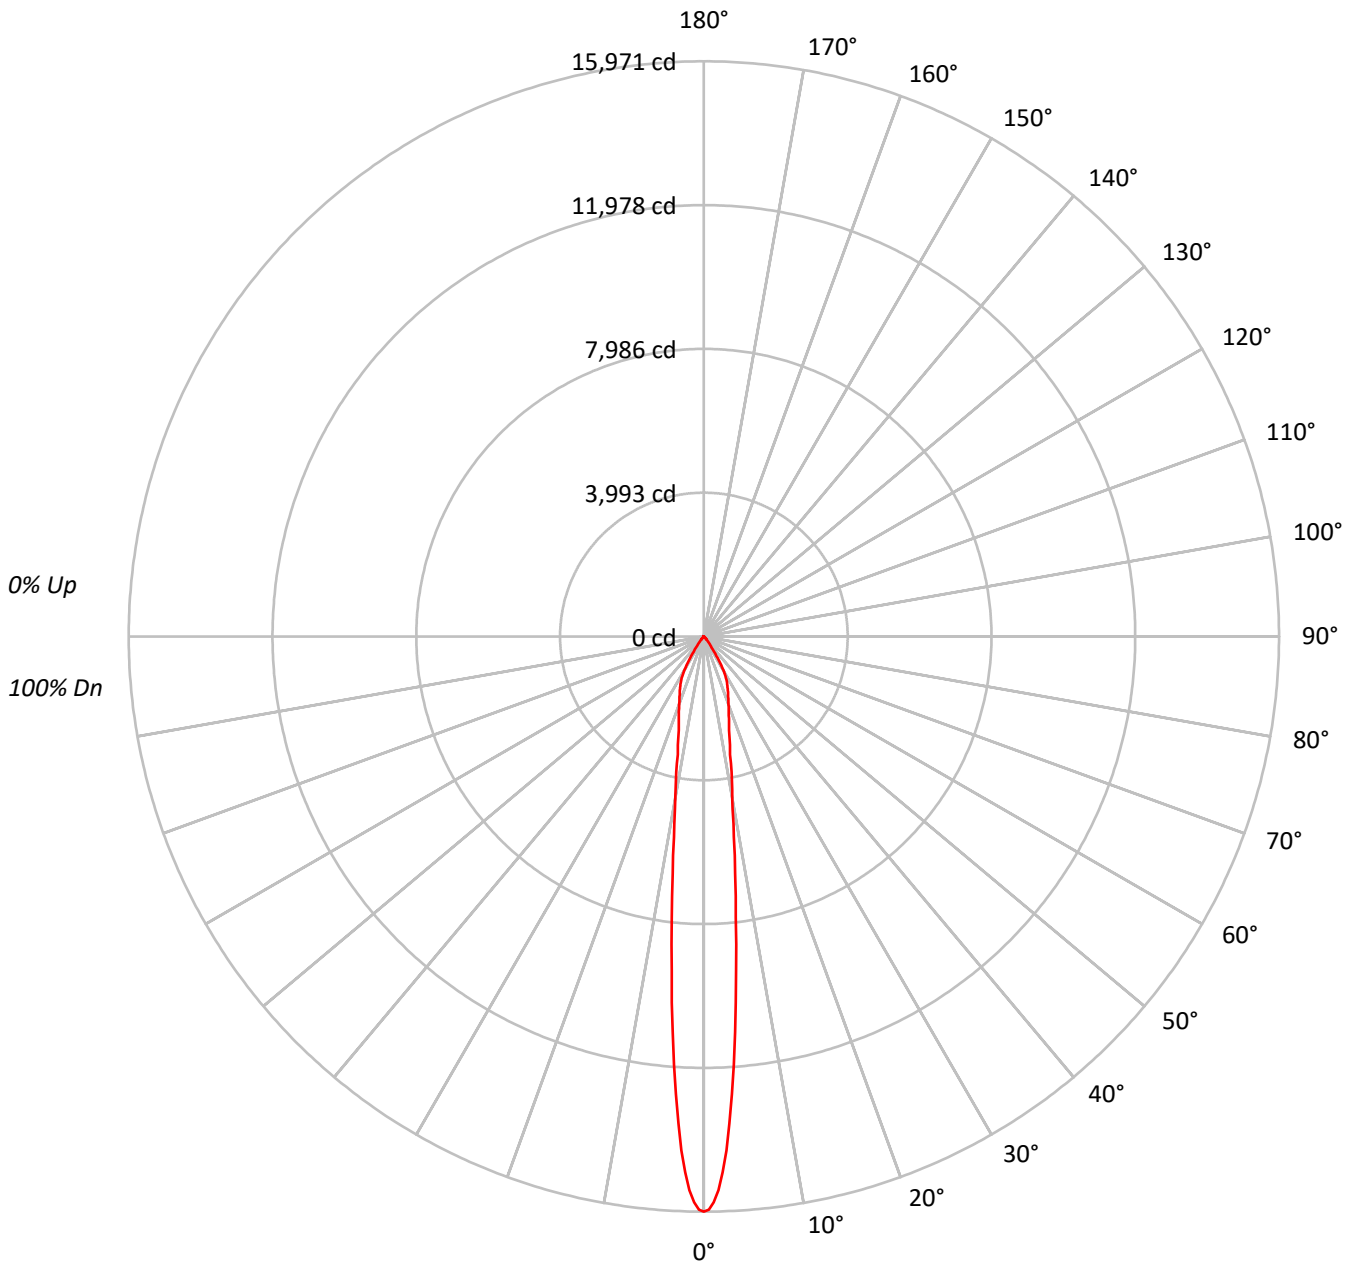



TEST NUMBER: P584221

CATALOG NUMBER: HC825D010-HM82555940-81NDC

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	115	112	110	108	112	110	108	107	106	105	103	102	101	100	99	98	97	96	96	96	96
2	110	106	103	100	108	104	101	99	101	99	97	98	96	95	96	94	93	91	91	91	91
3	106	101	97	93	104	99	96	93	97	94	91	95	92	90	92	90	89	87	87	87	87
4	102	96	91	88	100	95	91	88	93	89	87	91	88	86	89	87	85	83	83	83	83
5	98	92	87	83	97	91	86	83	89	85	82	87	84	82	86	83	81	80	80	80	80
6	95	88	83	79	93	87	82	79	86	82	79	84	81	78	83	80	78	76	76	76	76
7	91	84	79	76	90	83	79	76	82	78	75	81	78	75	80	77	75	73	73	73	73
8	88	81	76	73	87	80	76	73	79	75	72	78	75	72	77	74	72	71	71	71	71
9	85	78	73	70	84	77	73	70	76	72	70	76	72	69	75	72	69	68	68	68	68
10	83	75	70	67	82	75	70	67	74	70	67	73	69	67	73	69	67	66	66	66	66

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	492478
5°	315887
10°	142695
15°	86099
20°	65611
25°	52986
30°	38826
35°	14056
40°	5245
45°	2381
50°	758
55°	188
60°	105
65°	124
70°	0
75°	0
80°	302
85°	601



TEST NUMBER: P584221

CATALOG NUMBER: HC825D010-HM82555940-81NDC

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	778.3	29.7
10°-20°	790.5	30.2
20°-30°	707.7	27.0
30°-40°	285.1	10.9
40°-50°	46.7	1.8
50°-60°	4.2	0.2
60°-70°	1.5	0.1
70°-80°	1.1	0.0
80°-90°	1.6	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2276.5	87.0
0°-40°	2561.6	97.9
0°-60°	2612.5	99.9
0°-90°	2616.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2616.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	15971	
5°	10205	778
15°	2697	791
25°	1557	708
35°	373	285
45°	55	47
55°	4	4
65°	2	1
75°	0	1
85°	2	2
90°	0	



TEST NUMBER: P584221

CATALOG NUMBER: HC825D010-HM82555940-81NDC

CANDELA DISTRIBUTION (FULL):

0°	
0°	15970.7
0.5°	15921.4
1°	15715.3
1.5°	15384.1
2°	14882.0
2.5°	14288.4
3°	13545.0
3.5°	12729.4
4°	11922.6
4.5°	11018.9
5°	10205.0
5.5°	9318.8
6°	8600.1
6.5°	7851.4
7°	7263.1
7.5°	6641.3
8°	6140.9
8.5°	5638.9
9°	5261.9
9.5°	4846.1
10°	4557.2
12.5°	3361.2
15°	2697.0
17.5°	2304.1
20°	1999.4
22.5°	1756.3
25°	1557.3
27.5°	1358.2
30°	1090.4
32.5°	701.2
35°	373.4
37.5°	206.1
40°	130.3
42.5°	86.3
45°	54.6
47.5°	33.5
50°	15.8
52.5°	5.2
55°	3.5
57.5°	1.7
60°	1.7
62.5°	1.7
65°	1.7



TEST NUMBER: P584221

CATALOG NUMBER: HC825D010-HM82555940-81NDC

CANDELA DISTRIBUTION (continued):

	0°
72.5°	0.0
75°	0.0
77.5°	1.7
80°	1.7
82.5°	1.7
85°	1.7
87.5°	1.7
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







67.5°		1.7
70°		0.0



(END OF REPORT)