

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P584271

Luminaire Tested: **HC830D010-HM82555835-81MDW**

Issue Date: 10/21/2021

Test Information

Test Method: LM-41-14
Report Number: P584271
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2109-368-6)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 10/21/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC830D010-HM82555835-81MDW
Description: HALO COMMERCIAL 8" ROUND, NEW CONSTRUCTION FRAME, WITH 8" MEDIUM DISTRIBUTION, WHITE TRIM
Light Source: (1) HIGH LUMEN LED 80CRI / 3500K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3406.1 lumens
Efficiency: N/A
Efficacy: 121.6 lumens/watt
Spacing Criteria (0/90/45): 1 / 1 / 0.95
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct


Input Watts (W): 28
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P584271

CATALOG NUMBER: HC830D010-HM82555835-81MDW

Luminous Intensity Polar Plot

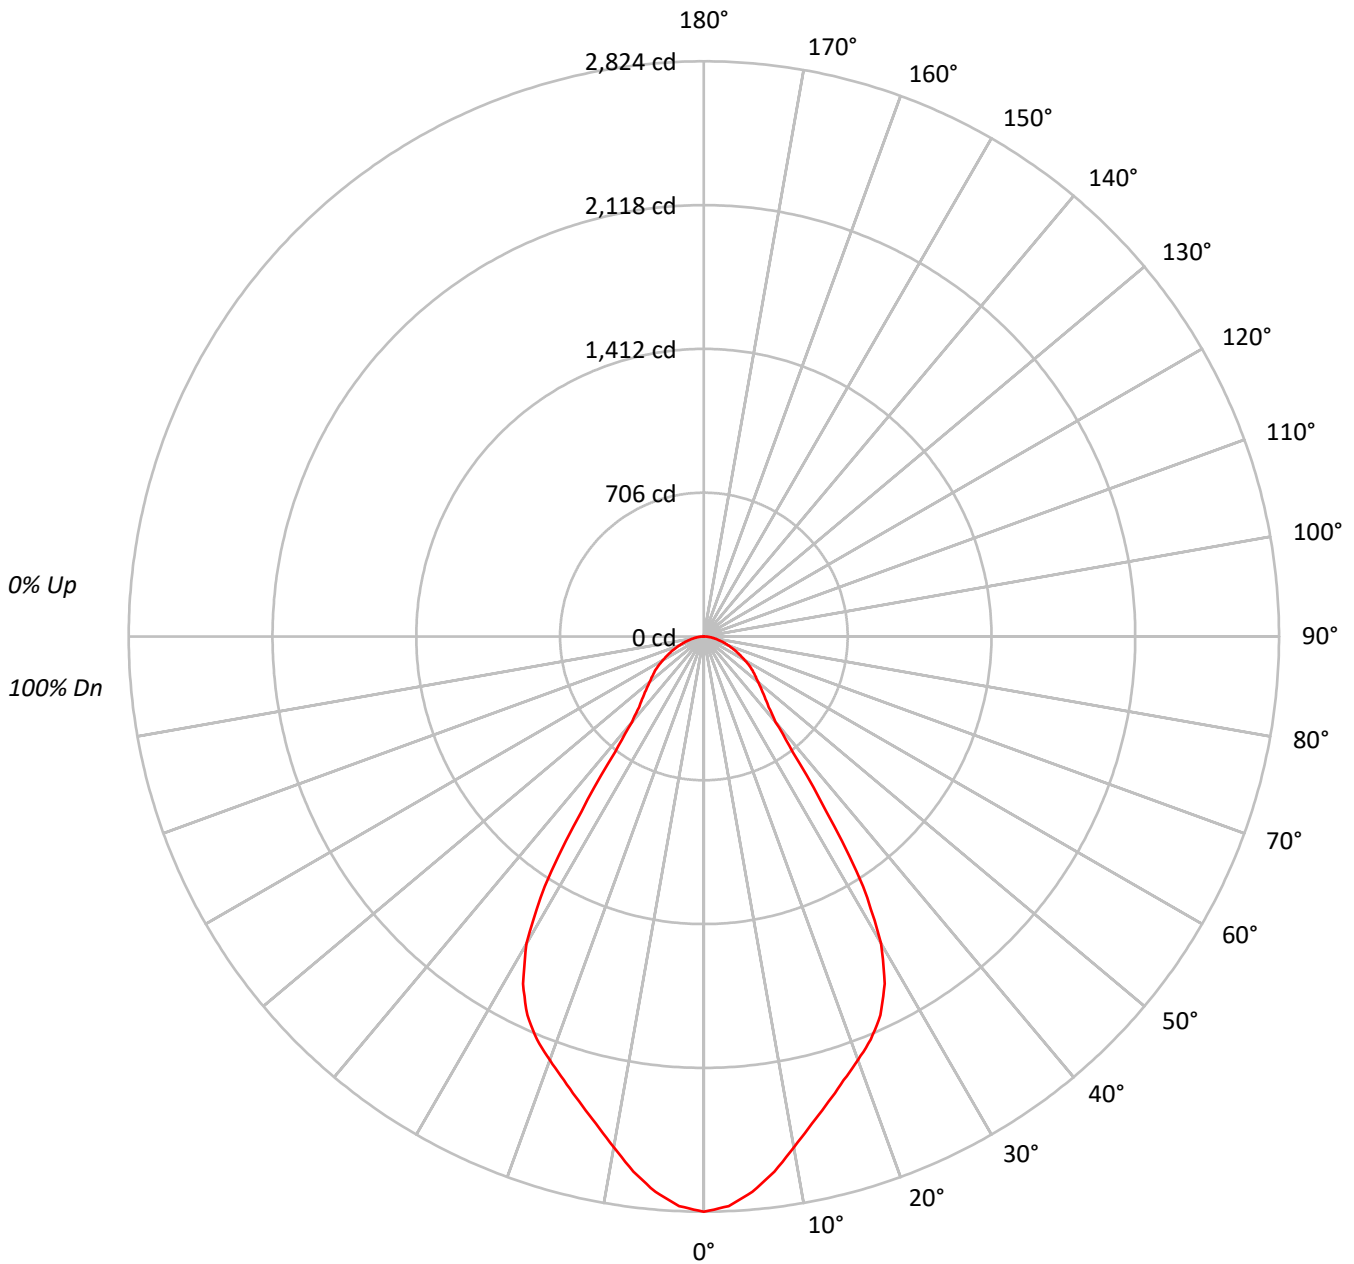



TEST NUMBER: P584271

CATALOG NUMBER: HC830D010-HM82555835-81MDW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

| | | | | | | | | | | | | | | | | | | | | | |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|---|
| RF | 20 | | | | 20 | | | | 20 | | | | 20 | | | | 20 | | | | |
| RC | 80 | | | | 70 | | | | 50 | | | | 30 | | | | 10 | | | 0 | |
| RW | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 0 |
| RCR | | | | | | | | | | | | | | | | | | | | | |
| 0 | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 | | | |
| 1 | 112 | 108 | 105 | 102 | 109 | 106 | 103 | 100 | 102 | 99 | 97 | 98 | 96 | 94 | 94 | 93 | 92 | 90 | | | |
| 2 | 104 | 98 | 93 | 89 | 102 | 96 | 92 | 88 | 93 | 89 | 86 | 90 | 87 | 84 | 87 | 84 | 82 | 80 | | | |
| 3 | 98 | 89 | 83 | 78 | 95 | 88 | 82 | 78 | 85 | 80 | 76 | 83 | 78 | 75 | 80 | 77 | 74 | 72 | | | |
| 4 | 91 | 82 | 75 | 70 | 89 | 81 | 74 | 69 | 78 | 73 | 69 | 76 | 72 | 68 | 74 | 70 | 67 | 65 | | | |
| 5 | 86 | 76 | 68 | 63 | 84 | 75 | 68 | 63 | 73 | 67 | 62 | 71 | 66 | 62 | 69 | 65 | 61 | 59 | | | |
| 6 | 81 | 70 | 63 | 58 | 79 | 69 | 62 | 57 | 67 | 61 | 57 | 66 | 61 | 56 | 64 | 60 | 56 | 54 | | | |
| 7 | 76 | 65 | 58 | 53 | 74 | 64 | 57 | 53 | 63 | 57 | 52 | 62 | 56 | 52 | 60 | 55 | 52 | 50 | | | |
| 8 | 72 | 61 | 54 | 49 | 70 | 60 | 53 | 49 | 59 | 53 | 48 | 58 | 52 | 48 | 57 | 52 | 48 | 46 | | | |
| 9 | 68 | 57 | 50 | 45 | 67 | 56 | 50 | 45 | 55 | 49 | 45 | 54 | 49 | 45 | 53 | 48 | 45 | 43 | | | |
| 10 | 64 | 53 | 46 | 42 | 63 | 53 | 46 | 42 | 52 | 46 | 42 | 51 | 46 | 42 | 50 | 45 | 42 | 40 | | | |

AVERAGE LUMINANCE (cd/sqm):

| | |
|-----|-------|
| | 0° |
| 0° | 87094 |
| 5° | 84721 |
| 10° | 79724 |
| 15° | 75481 |
| 20° | 72607 |
| 25° | 69804 |
| 30° | 61995 |
| 35° | 39481 |
| 40° | 22035 |
| 45° | 18455 |
| 50° | 16661 |
| 55° | 15704 |
| 60° | 14327 |
| 65° | 12915 |
| 70° | 11405 |
| 75° | 10139 |
| 80° | 9003 |
| 85° | 8102 |



TEST NUMBER: P584271

CATALOG NUMBER: HC830D010-HM82555835-81MDW

ZONAL LUMENS:

| Zone | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10° | 255.2 | 7.5 |
| 10°-20° | 666.8 | 19.6 |
| 20°-30° | 930.3 | 27.3 |
| 30°-40° | 669.4 | 19.7 |
| 40°-50° | 331.7 | 9.7 |
| 50°-60° | 259.5 | 7.6 |
| 60°-70° | 175.7 | 5.2 |
| 70°-80° | 91.3 | 2.7 |
| 80°-90° | 26.3 | 0.8 |
| 90°-100° | 0.0 | 0.0 |
| 100°-110° | 0.0 | 0.0 |
| 110°-120° | 0.0 | 0.0 |
| 120°-130° | 0.0 | 0.0 |
| 130°-140° | 0.0 | 0.0 |
| 140°-150° | 0.0 | 0.0 |
| 150°-160° | 0.0 | 0.0 |
| 160°-170° | 0.0 | 0.0 |
| 170°-180° | 0.0 | 0.0 |
| 0°-30° | 1852.2 | 54.4 |
| 0°-40° | 2521.6 | 74.0 |
| 0°-60° | 3112.9 | 91.4 |
| 0°-90° | 3406.1 | 100.0 |
| 90°-120° | 0.0 | 0.0 |
| 90°-150° | 0.0 | 0.0 |
| 90°-180° | 0.0 | 0.0 |
| 0°-180° | 3406.1 | 100.0 |

CANDELA DISTRIBUTION:

| | 0° | Flux |
|-----|------|------|
| 0° | 2824 | |
| 5° | 2737 | 255 |
| 15° | 2364 | 667 |
| 25° | 2052 | 930 |
| 35° | 1049 | 669 |
| 45° | 423 | 332 |
| 55° | 292 | 260 |
| 65° | 177 | 176 |
| 75° | 85 | 91 |
| 85° | 23 | 26 |
| 90° | 0 | |



TEST NUMBER: P584271

CATALOG NUMBER: HC830D010-HM82555835-81MDW

CANDELA DISTRIBUTION (FULL):

| | 0° |
|-------|--------|
| 0° | 2824.4 |
| 2.5° | 2799.1 |
| 5° | 2737.0 |
| 7.5° | 2649.6 |
| 10° | 2546.1 |
| 12.5° | 2449.5 |
| 15° | 2364.4 |
| 17.5° | 2283.8 |
| 20° | 2212.6 |
| 22.5° | 2141.3 |
| 25° | 2051.6 |
| 27.5° | 1922.9 |
| 30° | 1741.1 |
| 32.5° | 1455.9 |
| 35° | 1048.8 |
| 37.5° | 715.3 |
| 40° | 547.4 |
| 42.5° | 471.6 |
| 45° | 423.2 |
| 47.5° | 381.8 |
| 50° | 347.3 |
| 52.5° | 317.3 |
| 55° | 292.1 |
| 57.5° | 262.2 |
| 60° | 232.3 |
| 62.5° | 202.4 |
| 65° | 177.0 |
| 67.5° | 151.8 |
| 70° | 126.5 |
| 72.5° | 105.8 |
| 75° | 85.1 |
| 77.5° | 66.7 |
| 80° | 50.7 |
| 82.5° | 36.9 |
| 85° | 22.9 |
| 87.5° | 11.5 |
| 90° | 0.0 |



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)