

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P593656

Luminaire Tested: **HC830D010-HM82555850-81WDH**

Issue Date: 10/21/2021

**Test Information**

Test Method: LM-41-14  
Report Number: P593656  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2109-368-8)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 10/21/2021  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: HALO COMMERCIAL  
Catalog Number: HC830D010-HM82555850-81WDH  
Description: HALO COMMERCIAL 8" ROUND, NEW CONSTRUCTION FRAME, WITH 8" WIDE DISTRIBUTION, HAZE TRIM  
Light Source: (1) HIGH LUMEN LED 80CRI / 5000K CCT  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 3963.0 lumens  
Efficiency: N/A  
Efficacy: 141.5 lumens/watt  
Spacing Criteria (0/90/45): 1.12 / 1.12 / 1.06  
Luminous Opening: Circular (Dia: 0.67' x H: 0')  
CIE Type: Direct


Input Watts (W): 28  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P593656

CATALOG NUMBER: HC830D010-HM82555850-81WDH

### Luminous Intensity Polar Plot

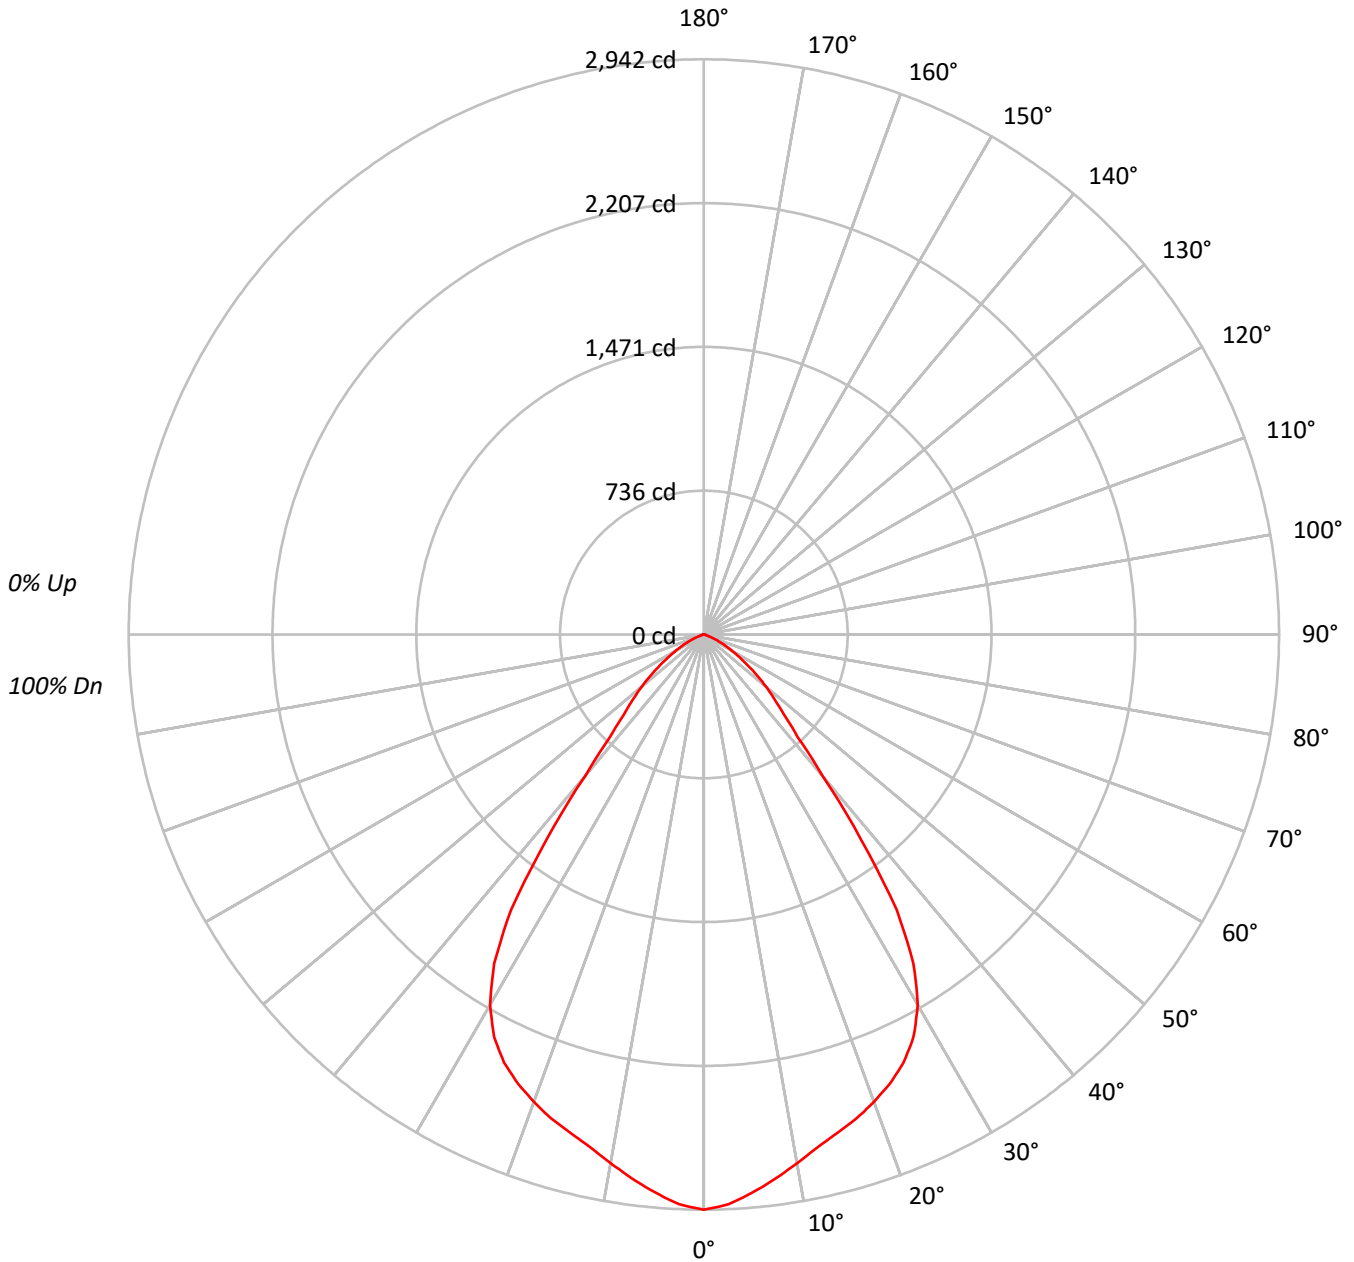



TEST NUMBER: P593656

CATALOG NUMBER: HC830D010-HM82555850-81WDH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				20
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	109	107	104	110	107	105	102	103	101	99	99	98	96	96	95	93	92			
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	87	85	83			
3	99	92	86	81	97	90	85	81	88	83	79	85	81	78	83	80	77	75			
4	93	84	78	73	91	83	77	72	81	76	72	79	74	71	77	73	70	68			
5	87	78	71	66	86	77	70	66	75	69	65	73	68	64	71	67	64	62			
6	82	72	65	60	80	71	64	60	69	64	59	68	63	59	66	62	58	57			
7	77	67	60	55	76	66	59	55	64	59	54	63	58	54	62	57	54	52			
8	73	62	55	50	71	61	55	50	60	54	50	59	54	50	58	53	49	48			
9	69	58	51	46	67	57	51	46	56	50	46	55	50	46	54	49	46	44			
10	65	54	47	43	64	53	47	43	53	47	43	52	46	43	51	46	42	41			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	90730
5°	88684
10°	85964
15°	84225
20°	83469
25°	82219
30°	77886
35°	64714
40°	38108
45°	25206
50°	19837
55°	14602
60°	10139
65°	6180
70°	2687
75°	1191
80°	888
85°	0



TEST NUMBER: P593656

CATALOG NUMBER: HC830D010-HM82555850-81WDH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	269.8	6.8
10°-20°	745.9	18.8
20°-30°	1105.1	27.9
30°-40°	1021.2	25.8
40°-50°	470.8	11.9
50°-60°	247.7	6.2
60°-70°	87.5	2.2
70°-80°	13.8	0.3
80°-90°	1.4	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2120.7	53.5
0°-40°	3141.9	79.3
0°-60°	3860.4	97.4
0°-90°	3963.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3963.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2942	
5°	2865	270
15°	2638	746
25°	2416	1105
35°	1719	1021
45°	578	471
55°	272	248
65°	85	88
75°	10	14
85°	0	1
90°	0	



TEST NUMBER: P593656

CATALOG NUMBER: HC830D010-HM82555850-81WDH

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	2942.3
2.5°	2917.3
5°	2865.0
7.5°	2807.7
10°	2745.4
12.5°	2685.6
15°	2638.3
17.5°	2595.9
20°	2543.6
22.5°	2486.3
25°	2416.5
27.5°	2321.9
30°	2187.4
32.5°	1995.5
35°	1719.1
37.5°	1320.4
40°	946.7
42.5°	710.1
45°	578.0
47.5°	490.8
50°	413.5
52.5°	338.9
55°	271.6
57.5°	214.3
60°	164.4
62.5°	124.6
65°	84.7
67.5°	49.8
70°	29.8
72.5°	17.5
75°	10.0
77.5°	7.5
80°	5.0
82.5°	2.5
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P







— 0°-180°







(END OF REPORT)