

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P584321

Luminaire Tested: **HC830D010-HM82555930-81MDH**

Issue Date: 10/21/2021

Test Information

Test Method: LM-41-14
Report Number: P584321
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2109-368-5)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 10/21/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC830D010-HM82555930-81MDH
Description: HALO COMMERCIAL 8" ROUND, NEW CONSTRUCTION FRAME, WITH 8" MEDIUM DISTRIBUTION, HAZE TRIM
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3150.8 lumens
Efficiency: N/A
Efficacy: 112.5 lumens/watt
Spacing Criteria (0/90/45): 0.68 / 0.68 / 0.81
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct


Input Watts (W): 28
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P584321

CATALOG NUMBER: HC830D010-HM82555930-81MDH

Luminous Intensity Polar Plot

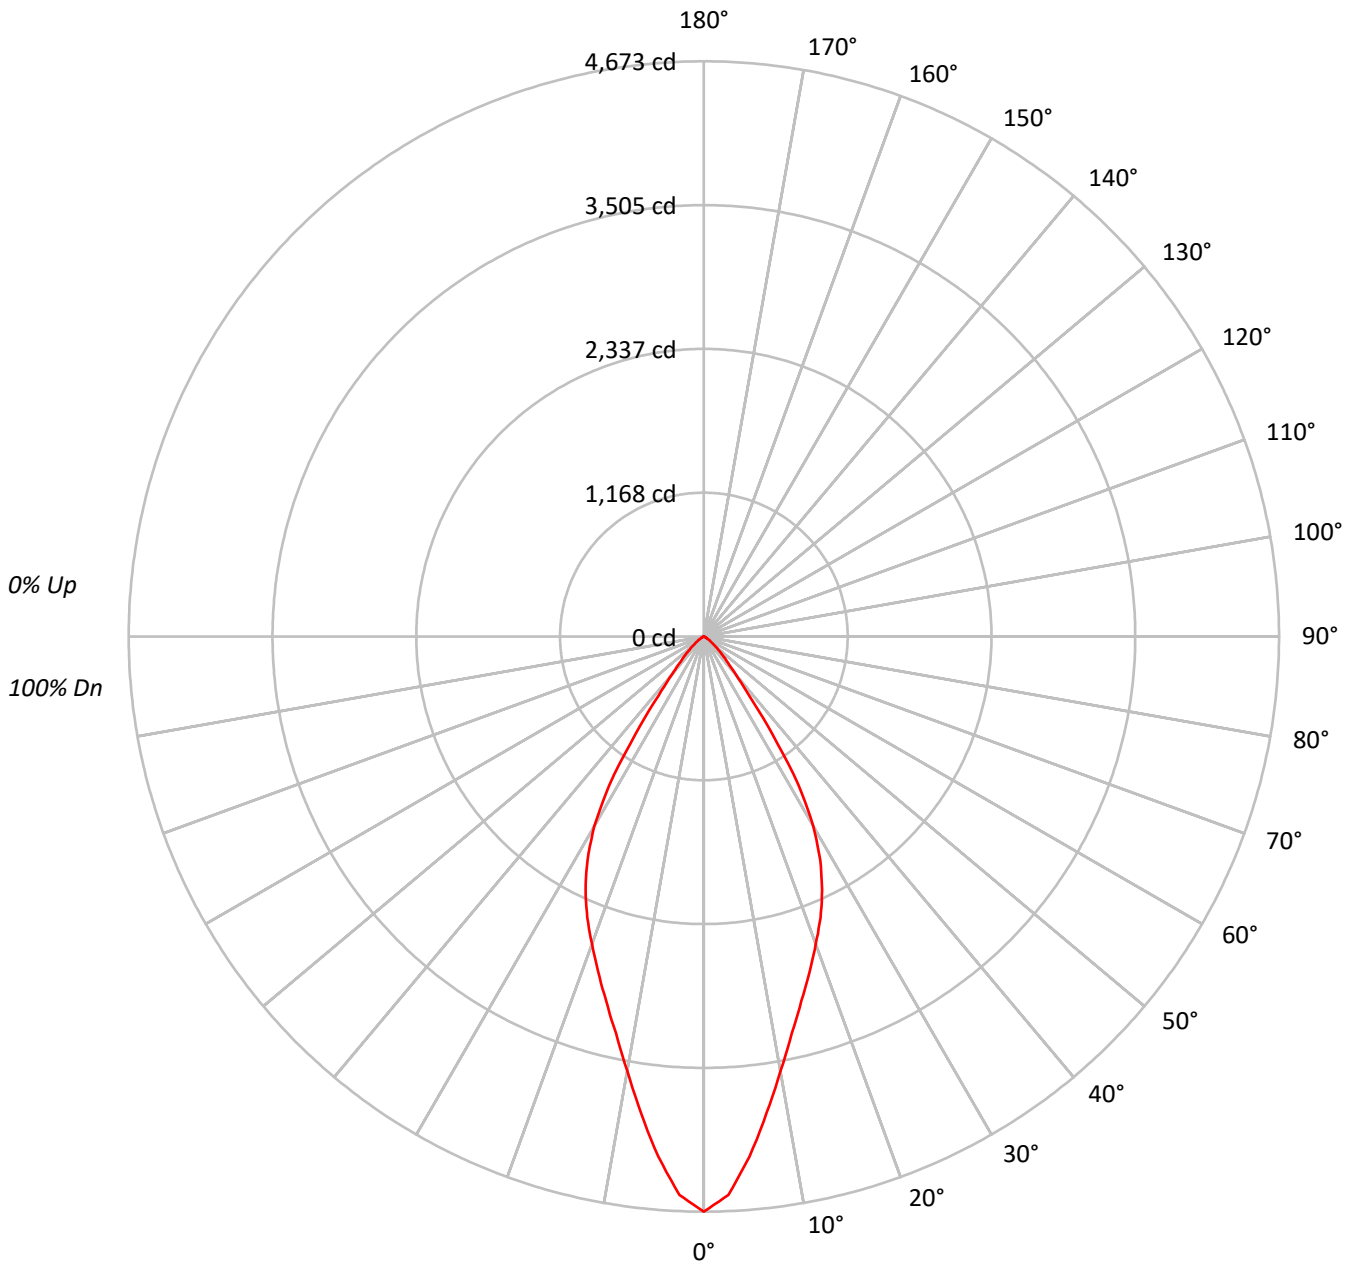



TEST NUMBER: P584321

CATALOG NUMBER: HC830D010-HM82555930-81MDH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	114	111	108	106	111	109	106	104	105	103	101	101	99	98	97	96	95	94			
2	108	103	99	96	106	101	98	95	98	95	93	95	93	91	92	90	89	87			
3	103	96	91	87	101	95	90	87	92	88	85	90	87	84	88	85	83	81			
4	97	90	85	80	96	89	84	80	87	82	79	85	81	78	83	80	77	76			
5	93	84	79	74	91	83	78	74	82	77	73	80	76	73	78	75	72	71			
6	88	79	73	69	87	78	73	69	77	72	68	76	71	68	74	70	67	66			
7	84	75	69	64	82	74	68	64	73	68	64	71	67	64	70	66	63	62			
8	80	70	64	60	79	70	64	60	69	64	60	68	63	60	67	63	60	58			
9	76	67	61	57	75	66	61	57	65	60	56	64	60	56	63	59	56	55			
10	73	63	57	54	72	63	57	53	62	57	53	61	56	53	60	56	53	52			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	144095
5°	131310
10°	112194
15°	97841
20°	87203
25°	77354
30°	63334
35°	36372
40°	16138
45°	9393
50°	5426
55°	3091
60°	1708
65°	1094
70°	775
75°	512
80°	373
85°	743



TEST NUMBER: P584321

CATALOG NUMBER: HC830D010-HM82555930-81MDH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	384.0	12.2
10°-20°	861.5	27.3
20°-30°	1031.2	32.7
30°-40°	623.8	19.8
40°-50°	174.8	5.5
50°-60°	54.3	1.7
60°-70°	15.5	0.5
70°-80°	4.2	0.1
80°-90°	1.4	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2276.7	72.3
0°-40°	2900.5	92.1
0°-60°	3129.7	99.3
0°-90°	3150.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3150.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4673	
5°	4242	384
15°	3065	861
25°	2274	1031
35°	966	624
45°	215	175
55°	58	54
65°	15	16
75°	4	4
85°	2	1
90°	0	



TEST NUMBER: P584321

CATALOG NUMBER: HC830D010-HM82555930-81MDH

CANDELA DISTRIBUTION (FULL):

0°	
0°	4672.9
2.5°	4540.7
5°	4242.1
7.5°	3905.2
10°	3583.1
12.5°	3301.5
15°	3064.8
17.5°	2855.7
20°	2657.4
22.5°	2474.1
25°	2273.5
27.5°	2047.5
30°	1778.7
32.5°	1431.1
35°	966.2
37.5°	601.4
40°	400.9
42.5°	288.0
45°	215.4
47.5°	157.8
50°	113.1
52.5°	78.9
55°	57.5
57.5°	38.4
60°	27.7
62.5°	19.1
65°	15.0
67.5°	10.7
70°	8.6
72.5°	4.3
75°	4.3
77.5°	2.1
80°	2.1
82.5°	2.1
85°	2.1
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)