

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P584343

Luminaire Tested: **HC830D010-HM82555935-81PSMDW**

Issue Date: 10/21/2021

Test Information

Test Method: LM-41-14
Report Number: P584343
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2109-368-12)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 10/21/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC830D010-HM82555935-81PSMDW
Description: HALO COMMERCIAL 8" ROUND, NEW CONSTRUCTION FRAME, WITH 8" PLASTIC TRIM
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3189.1 lumens
Efficiency: N/A
Efficacy: 113.9 lumens/watt
Spacing Criteria (0/90/45): 1.06 / 1.06 / 0.97
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct


Input Watts (W): 28
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P584343

CATALOG NUMBER: HC830D010-HM82555935-81PSMDW

Luminous Intensity Polar Plot

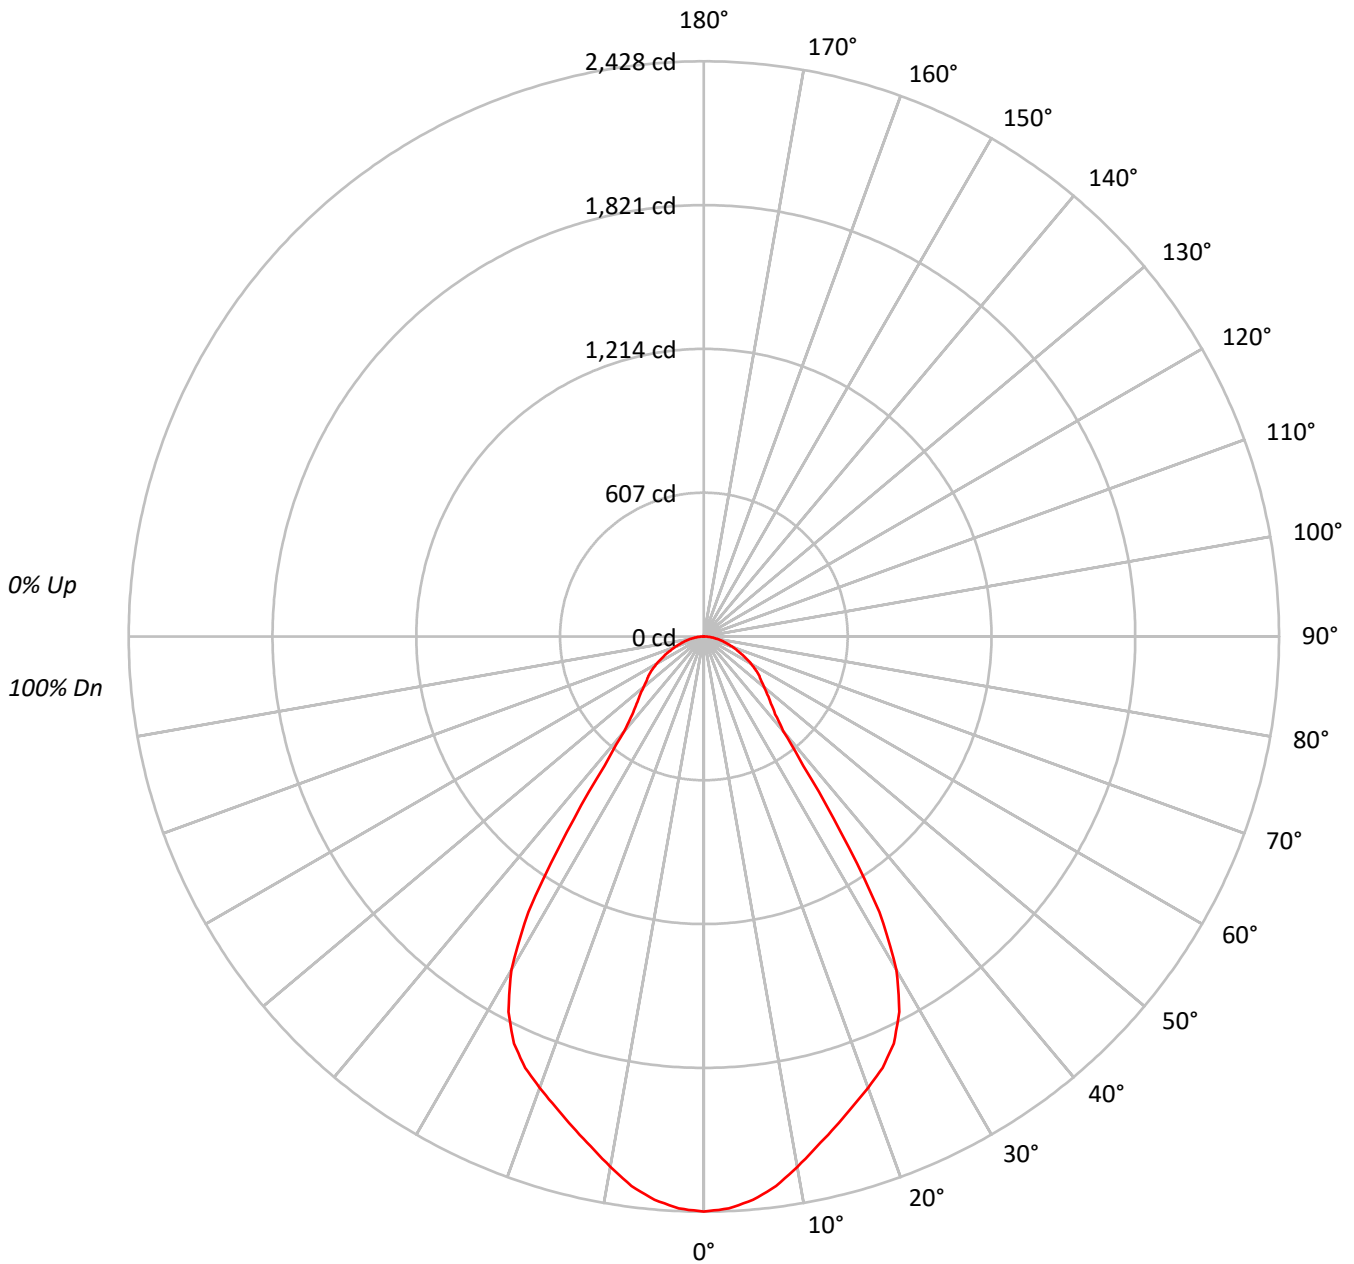



TEST NUMBER: P584343

CATALOG NUMBER: HC830D010-HM82555935-81PSMDW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	111	108	105	102	109	106	103	100	101	99	97	98	96	94	94	93	91	89			89
2	104	98	92	88	102	96	91	87	92	88	85	89	86	83	86	84	81	79			79
3	97	89	83	77	95	87	82	77	85	80	76	82	78	74	80	76	73	71			71
4	91	81	74	69	89	80	74	69	78	72	68	76	71	67	74	70	66	64			64
5	85	75	68	62	83	74	67	62	72	66	61	70	65	61	68	64	60	58			58
6	80	69	62	57	78	68	61	56	67	61	56	65	60	56	64	59	55	53			53
7	75	64	57	52	74	63	57	52	62	56	51	61	55	51	60	55	51	49			49
8	71	60	53	48	70	59	52	48	58	52	47	57	51	47	56	51	47	45			45
9	67	56	49	44	66	55	49	44	54	48	44	53	48	44	52	47	44	42			42
10	64	52	46	41	62	52	45	41	51	45	41	50	45	41	49	44	41	39			39

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	74861
5°	73884
10°	71178
15°	68397
20°	66507
25°	64506
30°	57882
35°	37942
40°	20976
45°	17487
50°	15946
55°	15220
60°	14154
65°	12835
70°	11594
75°	10485
80°	9518
85°	9093



TEST NUMBER: P584343

CATALOG NUMBER: HC830D010-HM82555935-81PSMDW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	224.3	7.0
10°-20°	604.5	19.0
20°-30°	860.2	27.0
30°-40°	636.7	20.0
40°-50°	315.3	9.9
50°-60°	251.7	7.9
60°-70°	174.7	5.5
70°-80°	94.1	3.0
80°-90°	27.7	0.9
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1689.0	53.0
0°-40°	2325.6	72.9
0°-60°	2892.6	90.7
0°-90°	3189.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3189.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2428	
5°	2387	224
15°	2142	604
25°	1896	860
35°	1008	637
45°	401	315
55°	283	252
65°	176	175
75°	88	94
85°	26	28
90°	0	



TEST NUMBER: P584343

CATALOG NUMBER: HC830D010-HM82555935-81PSMDW

CANDELA DISTRIBUTION (FULL):

0°	
0°	2427.7
2.5°	2417.0
5°	2386.9
7.5°	2339.7
10°	2273.2
12.5°	2204.6
15°	2142.5
17.5°	2082.4
20°	2026.7
22.5°	1970.9
25°	1895.9
27.5°	1786.5
30°	1625.6
32.5°	1379.0
35°	1007.9
37.5°	688.4
40°	521.1
42.5°	446.1
45°	401.0
47.5°	364.5
50°	332.4
52.5°	304.5
55°	283.1
57.5°	257.3
60°	229.5
62.5°	201.5
65°	175.9
67.5°	150.2
70°	128.6
72.5°	107.2
75°	88.0
77.5°	70.7
80°	53.6
82.5°	38.6
85°	25.7
87.5°	10.7
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)